



A000583972

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

9/10/2012 9:09:11 AM

AS DOC #: A000583972

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep


Index Number Z-0-25.0

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southeast Corner of Section 36, Township 139 N, Range 29 W  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 1-12-11 found a CIM at PI down 1 foot.
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

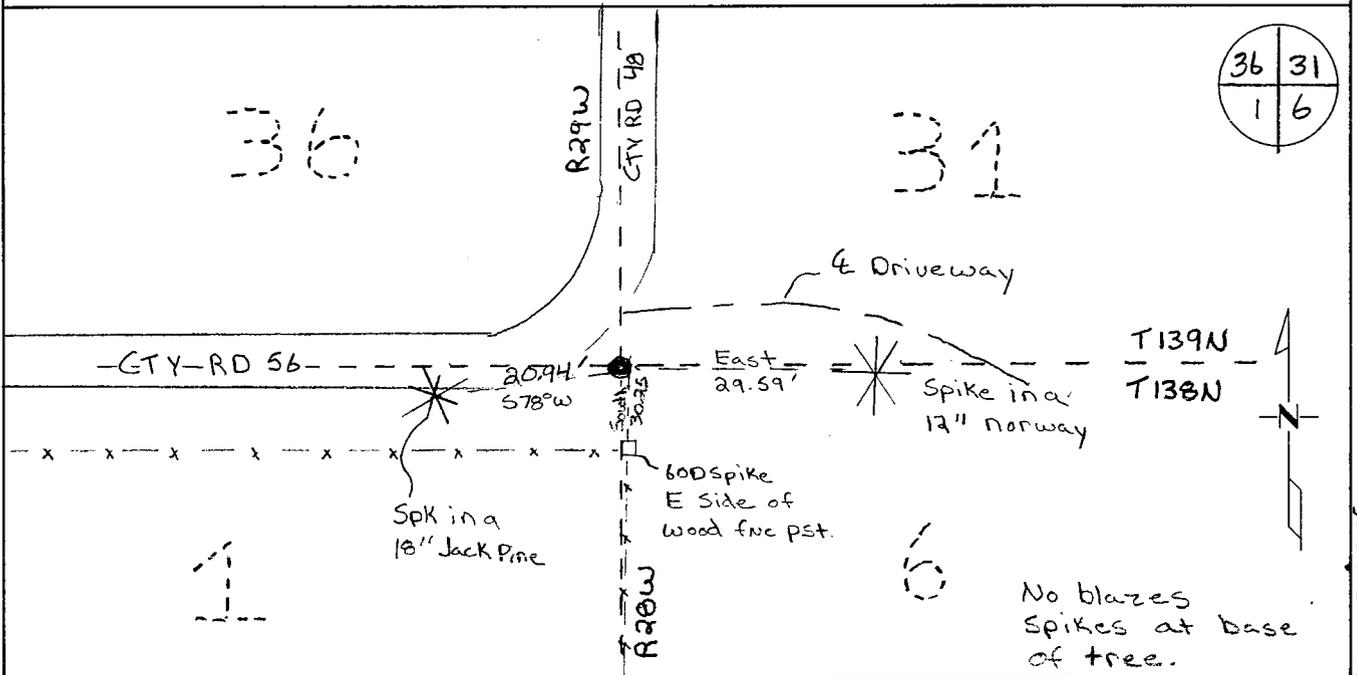

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Chris Hoglund  
Chris Hoglund, PS  
License No. 43932

Date: 7/19/12





**Statement of Evidence:**

Southeast Corner of Section 36, Township 139 North, Range 29 West, Ponto Lake Township, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota.

- 1863 Original US General Land Office survey set a wood post and bearing trees noted as:
- |                 |         |          |
|-----------------|---------|----------|
| 11" Aspen       | N 52° E | 39 links |
| 5" White Birch  | S 48° E | 21 links |
| 6" White Birch  | S 41° W | 15 links |
| 12" White Birch | N 8° W  | 30 links |
- 1914 F.A. Donner set corner proportionally and filed in Curo Book 94, Page 79-81. Set iron pipe. Page 86.
- 1914 Twp rd order shows no survey, on file in the office of the Cass County Surveyor.
- 1918 Ben Clark set corner proportionally and filed in Book "C" Page 292, Survey Record No. 434. Set 3x30"iron pipe Page 335.
- 1922 Ben Clark filed as Cass County Resurvey "E-13", filed in the office of the Cass County Recorder.  
Reference ties:
- |                |         |           |
|----------------|---------|-----------|
| 6" Norway Pine | S 65° E | 48.7 feet |
| 10" Jack Pine  | N 16° W | 58.8 feet |
| 5" Norway Pine | N 48° W | 71.5 feet |
| 6" Norway Pine | S 19° E | 17.8 feet |
- 1981 David Landecker L.S. 17008 searched for the section corner but could find no evidence of the corner.
- 1990 Tony Kerick (Crow Wing County Surveyor), Registered Land Surveyor Number 12266, set a Crow Wing County cast iron monument based on a doubled distance from the quarter corner and the 1/16<sup>th</sup> corner to the north, and filed Crow Wing County Corner Certificate Document No. 419100, dated January 25, 1991.  
Reference ties:
- |                 |         |                                      |
|-----------------|---------|--------------------------------------|
| 18" Norway Pine | N 38° W | 72.43 feet (possible 1922 Clark tie) |
| 10" Norway Pine | N 27° E | 49.52 feet                           |
| 8" Norway Pine  | East    | 29.59 feet                           |
| 15" Jack Pine   | S 78° W | 20.94 feet                           |
- 2011 Westwood Professional Services, Inc. found 1990 Kerrick 4" cast iron monument and two 1990 Kerick ties. Accepted found monument as being a perpetuation of the 1922 Clark Survey, which is the best available evidence for this corner. Located found monument with a 20 minute static GPS shot and verified coordinates with VRS GPS observation. Analysis of the recovered data and field evidence indicated that the monument found by Westwood Professional Services in 2011 is the accepted position for this corner.
- Cass County Coordinates South Zone obtained by static GPS (NAD 83, 1996 Adj)  
N: 336657.72  
E: 546869.16  
Central State Plane Coordinate:  
N: 986334.46  
E: 2617272.44