

A000584219

OFFICE OF THE COUNTY RECORDER CASS COUNTY, MINNESOTA CERTIFIED, FILED, AND/OR RECORDED ON

9/12/2012 10:14:27 AM AS DOC #: A000584219

PAGES: 4 REC FEES: 0.00

KATHRYN M. NORBY CASS COUNTY RECORDER

BY_KF____Dep

AFFIDAVIT BY THE CASS COUNTY SURVEYOR IN REGARD TO AN AFFIDAVIT AS TO LOCATION OF A GOVERNMENT CORNER

Robert Kovanen, being first duly sworn, deposes and states as follows:

That Affiant is the County Surveyor in and for the County of Cass, in the State of Minnesota;

That in such capacity Affiant has knowledge of the books and records kept in the Office of the County Surveyor in and for the County of Cass, State of Minnesota;

That the attached AFFIDAVIT AS TO LOCATION OF GOVERNMENT CORNER has been found in the Surveyor's records and after checking with the Cass County Recorder, it was determined that the document was never assigned a document number and was never officially recorded in the real estate records or tracted in the tract indexes within said Cass County Recorder's Office;



Page 2 of 4

A000584219

-2-

That in order to make the attached AFFIDAVIT AS TO LOCATION OF GOVERNMENT CORNER a matter of public record and locatable by legal description, Affiant does herewith attach said document to this affidavit and requests the Cass County Recorder to record same at her earliest opportunity.

FURTHER, Affiant sayeth not.

Robert Kovanen, Cass County Surveyor

Subscribed and sworn to before me

this by day of Syst, 20/2.

Linda C. Husly

Notary Public


LINDA C. HUSBY
Notary Public
State of Minnesota
My Comm. Exp. 1-31-2015

This instrument was drafted by:

Robert Kovanen Cass County Surveyor P.O. Box 579 Walker, MN 56484

In the Presence of:

Quarter Corner to Sec. 's 16 - 21	T. llin	_R . 27W	No. 6 //
State of Minnesota, County of Cass			
William H. Okerman	, bein	g first duly sworn, depos	es and says:
That I reside at Bemidji laws of the State of Minnesota, having S			
I further depose and say that on the	9th	day of June	, 1969
I found the Quarter corne which was evidenced by remains of the			
iron pipe 3 feet long with brass cap marked			T141N R27W
W. Oak 6 inch N17°45'W 104.3 feet - now 17 inch N18°W 104.3 feet			1 ₄ <u>S16</u> S21
W. Oak 10 inch S71°E 32.3 feet - 1	not found		1919
and that to perpetuate the location of such consisting of no new monument set as	h corner I did, at the ed G.L.O. monument is	xact location thereof, placin good condition	ce a permanent marke
from which reference or witness monumen W. Oak 5 inch N47 W 36.56 feet scrift Film 9 inch S89 W 60.42 feet scrift W. Oak 7 inch S5 W 41.66 feet scrift		vanner following:	
Steel sign post 60 inches long due with Forest Service signs \$4-2 and			

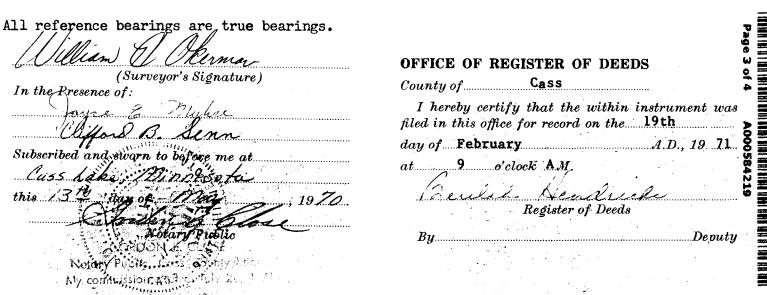



Page 4 of 4 A000584219

