

A000587971

OFFICE OF THE COUNTY RECORDER CASS COUNTY, MINNESOTA CERTIFIED, FILED, AND/OR RECORDED ON

12/28/2012 9:30:57 AM AS DOC #: A000587971 PAGES: 4 REC FEES: 0.00

KATHRYN M. NORBY CASS COUNTY RECORDER

BY_KF___Dep

AFFIDAVIT BY THE CASS COUNTY SURVEYOR IN REGARD TO AN AFFIDAVIT AS TO LOCATION OF A GOVERNMENT CORNER

STATE OF MINNESOTA }

ss

COUNTY OF CASS }

Robert Kovanen, being first duly sworn, deposes and states as follows:

That Affiant is the County Surveyor in and for the County of Cass, in the State of Minnesota;

That in such capacity Affiant has knowledge of the books and records kept in the Office of the County Surveyor in and for the County of Cass, State of Minnesota;

That the attached AFFIDAVIT AS TO LOCATION OF GOVERNMENT CORNER has been found in the Surveyor's records and after checking with the Cass County Recorder, it was determined that the document was never assigned a document number and was never officially recorded in the real estate records or tracted in the tract indexes within said Cass County Recorder's Office;

That in order to make the attached AFFIDAVIT AS TO LOCATION OF GOVERNMENT CORNER a matter of public record and locatable by legal description, Affiant does herewith attach said document to this affidavit and requests the Cass County Recorder to record same at her earliest opportunity.

FURTHER, Affiant sayeth not.

Robert Kovanen, Cass County Surveyor

Subscribed and sworn to before me this day of 420, 20/2.


This instrument was drafted by:

Robert Kovanen Cass County Surveyor P.O. Box 579 Walker, MN 56484

AFFIDAVIT AS TO LOCATION OF COVERNMENT CORNER

	TO LOCATION OF C	OVERNMENT CO	KNEK
North 1/16 Corner to Sec. 27-28	T. 141 N	R. 31 W	No. 33
State of Minnesota,	$\bigg\} ss.$		
Peter J	• Meyer , being	f first duly sworn, deposes o	and says:
That I reside at Cass La	ke, Minnesota, a, having Surveyor's Registration (nd am registered as a Land	Surveyor under the
I further depose and say th	that on the 29th corner of Sections 27-2	day of March	, 19 61 ,
to Sections 21-22-27-28, a The 1/16 corner location w	gle proportionate measureme nd the Section corner common as determined by transit tr ook "Boundry Surveys-Field s Lake, Minnesota.	n to Sections 27-28-33 averse methods. The f	-34, Tl41N,R31W. ield notes of
and that to perpetuate the locat consisting of a 2" inside d and capped with a 3" diame	ion of such corner I did, at the exiameter 5' long galvanized ter bronze tablet stamped:	ract location thereof, place a wrought iron pipe fill Tl41N, N 1 S 28	ed with concrete R31W /16 S 27
from which reference or witness Oak 7" S68E 16.65"	monuments are located in the mo	anner following: R.L.S.	No. 3628
Jack Pine 13" N25E 35.85'			
Cedar Post 4" x 4" x 6.5"	penta treated and with a re	d top S 1°E 104.5'	
All reference bearings are	true bearings.		
far Ime	96F)	ICE OF REGISTER OF D	EEDS

Till	Jmyc	
(Survey	or's Signature)	
In the Presence of:) '	
Bureal Fr	and cel	
June ann 7		
Subscribed and sworn to	before me at	
Walker, Minnes	ota	
this 2nd day of	February	19.62
Buchah.	Kenanic	(
Deputy Register	of Deeds	
Cass County, Mi	nnesota	

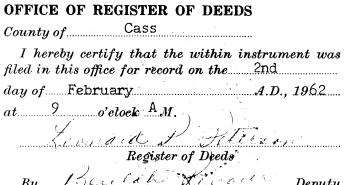



Page 4 of 4 A000587971

