

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 30, Township 143 N., Range 25 W., 5th P.M.  
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 10-26-2012 found a 3" iron pipe with a 3-1/4" cap, 14" above ground level.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_

## SKETCH OF REFERENCE TIES (NOT TO SCALE)

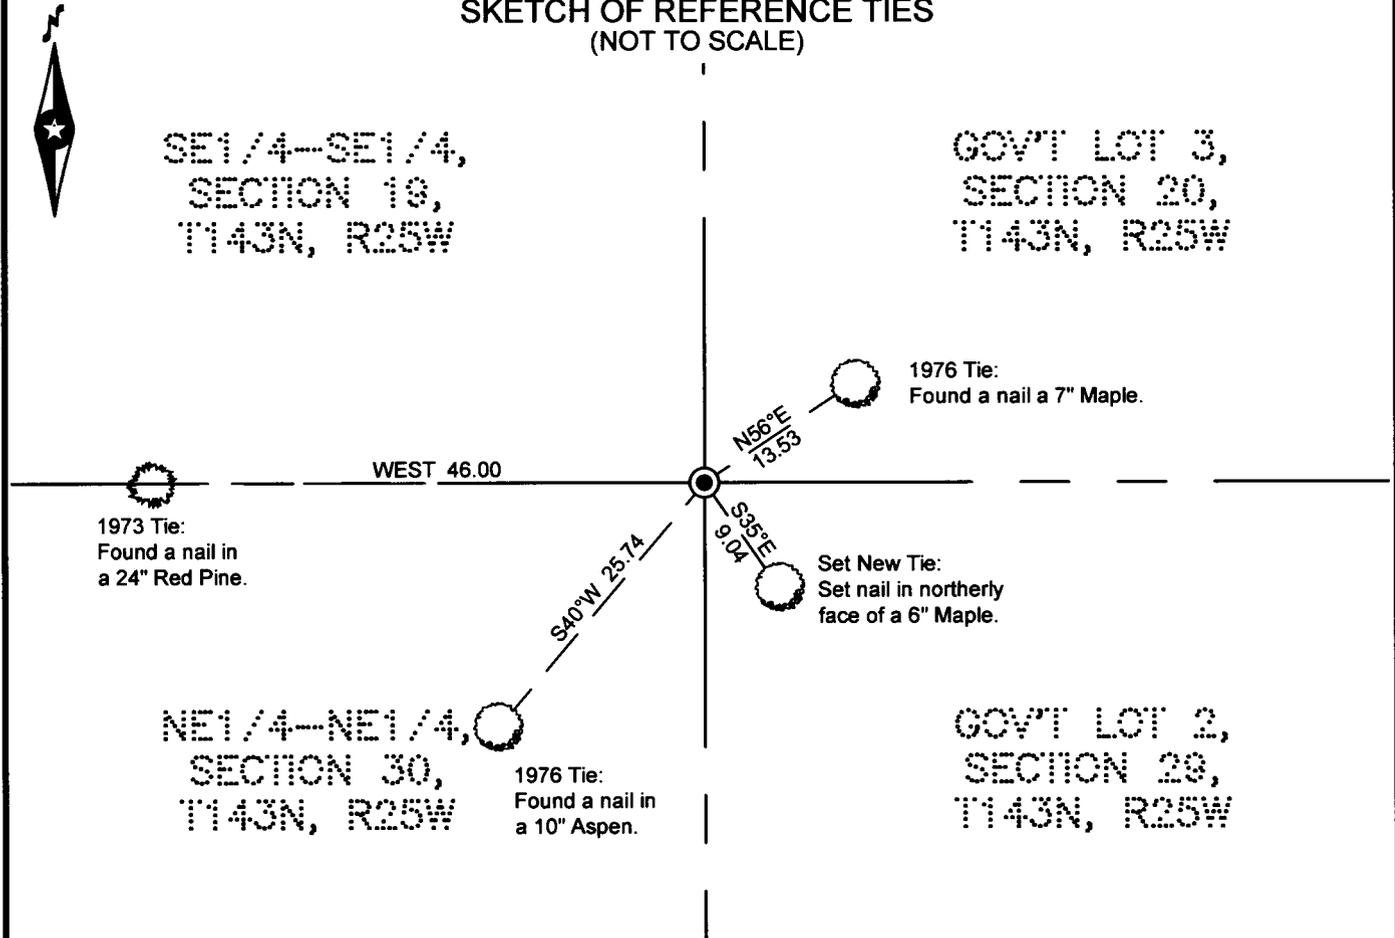

NOTE: All bearings are true.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this united States public land survey monument record is correct and complete to the best of my knowledge and belief.

Terry L. Freeman, Land Surveyor

Date 12/28/12 MN License No. 21367



A000589942

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

2/26/2013 8:25:09 AM

AS DOC #: A000589942

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep

Page 1 of 2 A000589942

**STATEMENT ON EVIDENCE****Northeast Corner of Section 30, Township 143 North, Range 25 West of the 5th Principal Meridian.**

In 1872, Hayward & Griffin, U.S. Deputy Surveyors set a wood post to mark the corner location and established bearing trees as follows: a 10" White Pine S 28° E 10 links, 4" Fir N 43° E 15 links, 7" Birch N 20° W 40 links and 4" Fir S 85° W 10 links.

In 1958, Pete Meyer set a 3/4" pipe for temporary corner to sections 19-20-29-30.. Information in Cass County Survey Department, in Curo Book 242, page 127.

In 1960, Minnesota Dept. of Natural Resources- Engineering found an IP in place. Map and notes on file in Cass County Surveyors Office.

In 1963, Harold Curo found Pete Meyers iron and BT's: 4' Maple S 65° E 13.4feet, 4" Maple S 15° W 19.5 feet, 10" White Birch N 80° W 7.1 feet and 4" Maple N 15° E 14.00 feet. Information in Cass County Survey Department, in Curo Book 242, pages 128 & 131.

In November 1963, William Okerman, U.S. Forest Service Surveyor, found a 1" iron pipe. Information on file in the U.S.F.S. Cass Lake Office T143N R25W Book 1, page 3

In 1968, Robert Schneider, RLS #5740, performs a survey in Section 29 and finds a 1" iron pipe. Information on file in the Walker Office of Northern Engineering & Consulting, Inc.

In 1973, Curt Krause, USFS personnel, found the corner and marked the following: Norway Pine West 46 feet and Norway Pine East 150 feet. Information on file in the U.S.F.S. Cass Lake Office T143N R25W Book 1, page 3.

In 1976, Louis D. Gilbert, U.S. Surveyor for the BLM, made a dependent resurvey of part of the township and found the 1" iron pipe for the corner and sets a 2 1/2"x28" aluminum post with stamped aluminum cap. He marks new BT's: 4" Maple N 56° E 20.5 links, 5" Birch S 18° E 14 links, 7" Aspen S 40° W 39 links and 6" Birch N 53° W 50.5 links. Information on file in the Cass County Surveyors Office.

In 1979, Jim Schoonover, USFS personnel, recovered BLM corner and ties. Information on file in the U.S.F.S. Cass Lake Office T143N R25W Book 1, page 3.

In 2004, Terry L. Freeman, (Landecker & Assoc.) RLS #21367, performs a survey in Section 20 and finds corner.

In 2009, Laverne Leuelling, (Northern Lights Surveying & Mapping) RLS #16089, performs a survey in Section 20 and shows a found BLM monument.

On December 3, 2012, a Northern Engineering & Consulting survey crew found the 3-1/4" capped BLM monument and the NE & SW BLM BT's and the 1973 USFS BT west. They marked 1 new BT as shown on front of this certificate. I accept the found BLM monument as a perpetuation of the corner as used by others.

**County Coordinates (Cass County North)**

Northing	237332.901
Easting	583375.051