

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 29
Township 145 N, Range 29 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000600042

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/30/2014 11:01:19 AM

AS DOC #: A000600042

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

On _____, found a(n): _____
DATE

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 7/25/2012, set a(n): 2.5"x 4' Iron Pipe with 3.5" Brass Cap, 1.5' above ground with a fence post on the North side
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

14" Red Pine Nail & Disk in Northeast Face up 1.0' set tag

2.5" x 4' Iron Pipe with a 3.5" Brass Cap 1.5' above ground with a fence post on the North side



10" Red Pine Nail & Disk in Northwest Face up 1.0' set tag

NW Corner Section 29 T145N, R29W 5th PM

NE Corner Section 29 T145N, R29W 5th PM

12" Red Pine Nail & Disk in North Face up 1.0' set tag

12" Red Pine Nail & Disk in Southwest Face up 1.0' set tag

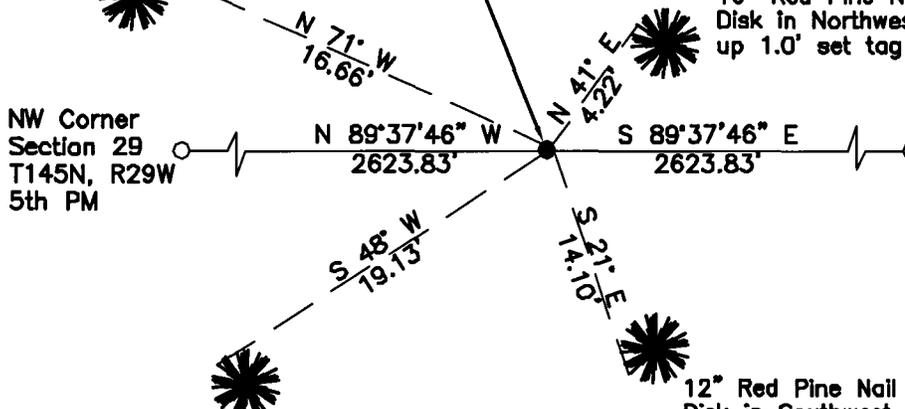

NOTE: RED PINE PLANTATION

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17209123.750

Easting: 1297314.881

NAD 83/1996 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre signature 6/11/13 date

Ross Wamre, Minnesota License No. 45334

Page 1 of 2 A000600042



STATEMENT OF EVIDENCE: Quarter Corner common to Sections 20 and 29 of Township 145 North, Ranges 29 West of the 5th Principal Meridian.

1874; This corner was originally established by P.H. Conger his field notes indicate a wood post set at this corner position, witnessed by:

White Pine 40" South 49° East, 8 links
White Pine 30" North 14° East, 30 links

2010; A Kadrmas, Lee & Jackson survey crew found no evidence of this corner or its accessories.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information and the lack of information available set a 2.5" x 4' Iron Pipe with a 3 ½" Brass Cap, 1.5' above ground at a lost single proportionate measurement location between the Northeast Corner of Section 29 and the Northwest Corner of Section 29. Witnesses established as shown on face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office