



A000610755

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

4/9/2015 10:15:24 AM

AS DOC #: A000610755

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep TX#: 121975

Page 1 of 2 A000610755

Twp 137 Rge 31 Index No. R.0-15.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter corner of Section 27, Township 137 N., Range 31 W., 5th P.M.  
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On \_\_\_\_\_ found \_\_\_\_\_

left monument as found     lowered monument     removed monument (explain)

On 29 Jan 2015 placed a 1.25 inch outside diameter iron pipe capped RLS 21367  
up 0.3 foot, in open marsh.

#### SKETCH OF REFERENCE TIES NOT TO SCALE

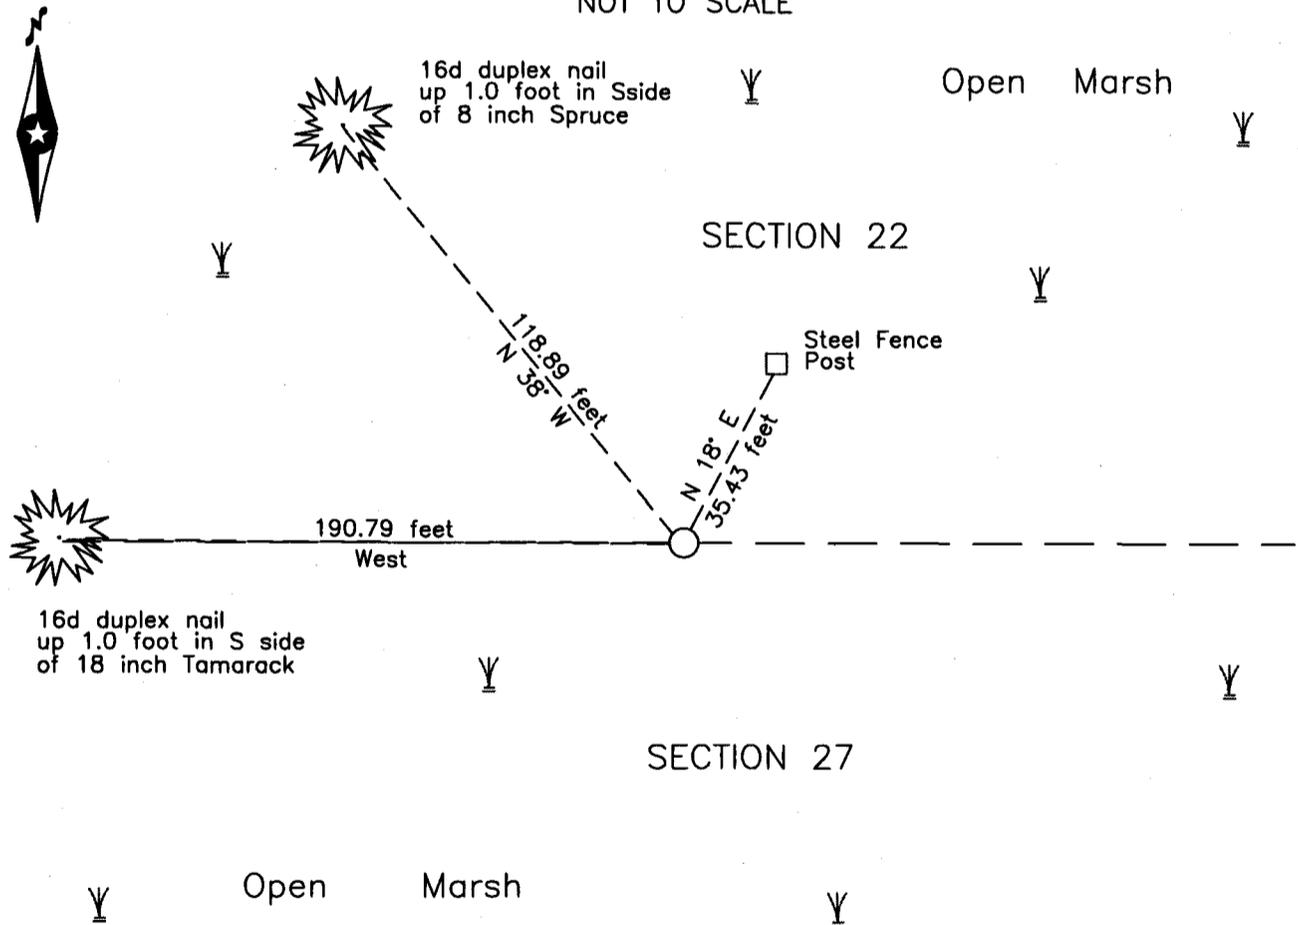

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor  
Date 4/8/15 MN License No. 21367



**Index No. R.0-15.0**

Statement of Evidence

**North Quarter corner of Section 27, Township 137 North, Range 31 West, 5th Principal Meridian.**

Aug. 1870 R. Cronk, General Land Office (GLO) Deputy Surveyor, notes for the subdivision of Township 137 North, Range 31 West, set a post for the original corner and referenced it as follows:  
12" Tamarack      S 39° E      20 links(13.20 feet)      8" Tamarack      N 6° W      66 links(43.56 feet)  
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

Jan. 2015 B. Hippen, technician, records of the CCHD/SO, set a 1.25 inch outside diameter iron pipe, up 0.3 foot, at the lost position, midway and on line between the northeast and northwest corners of Section 27, in open marsh and witnessed as follows:  
8" Spruce      N 38° W      118.89 feet      Steel Post      N 18° E      35.43 feet  
18" Tamarack      West      190.79 feet

The monument, recovered and established references for the position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by CCHD/SO is the accepted location of this corner.**

**County Coordinates (Cass County South)**

**Northing 283715.31**  
**Easting 469516.65**