



A000652201

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

8/8/2019 11:09:11 AM

AS DOC #: A000652201

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY KF Dep TX#: 155513

Page 1 of 2
A000652201

Twp 144 Rge 31 Index No. E.0-09.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast corner of Section 8, Township 144 N., Range 31 W., 5th P.M.
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 8 May 2007 found wood post point and angle iron, down 0.5 foot
on centerline of County Road No. 145.

left monument as found lowered monument removed monument (explain)

On 10 May 2007 placed a 1 inch by 30 inch aluminum tube, with aluminum cap,
down 0.5 foot, on centerline of County Road No. 145.

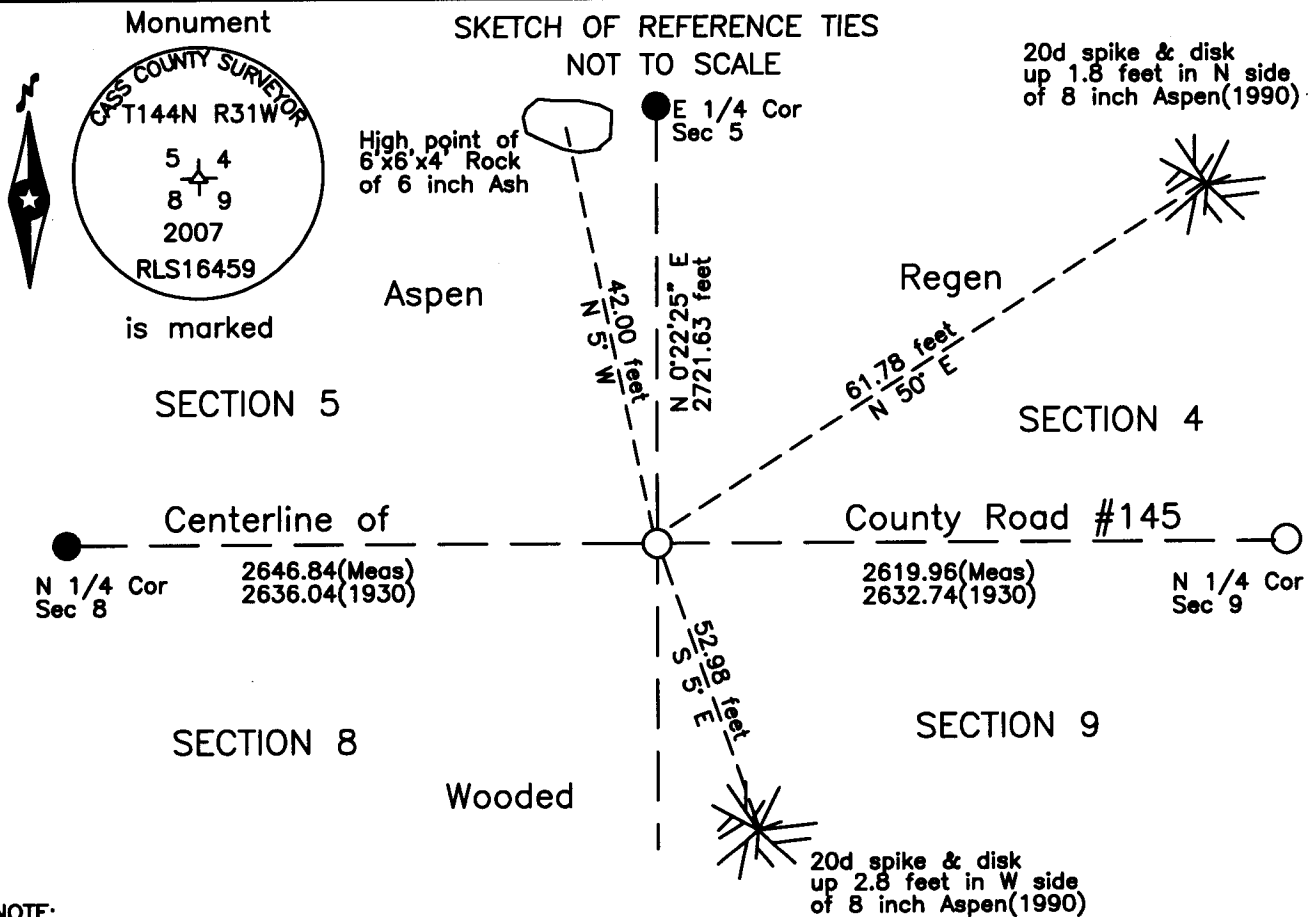

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 8/7/19 MN License No. 21367



Index No. E.0-09.0

Statement of Evidence

Northeast corner of Section 8, Township 144 North, Range 31 West, 5th Principal Meridian.

Aug. 1915 N.D. Gorman, Deputy Surveyor, Curo Book 96, pages 74, 75, 77 and 78, on file in the Cass County Highway Department, Surveyor's Office (CCHD/SO), states "I go to cor to sec. 4-5-8-9 to locate U.S. Bts, but with no success." He then chains east from the northeast corner of section 7, at 5289.0 states "cor to sec's 4-5-8-9 lies S 13.4 ft. Cor. oak post set by surveyor Middleton". He notes the distance to the north quarter of section 9 as 2619.0 feet and the distance to the north quarter of section 8 as 2644.5 feet.

Dec. 1990 W.E. Curo, LS 11395, filed a Certificate of Location of Government Corner in the Cass County Recorders Office as Document Number 325738.

May 2007 B. Hippen, technician and P. Swentkofske, Backhoe operator, records of the CCHD/SO found a 2 inch outside diameter wood post point and 4 inch angle iron, down 0.5 foot, on centerline of County Road #145. This post is N 82°32'00" E, 13.02 feet from the recovered 1930 GLO concrete monument and fits the 1915 Gorman and 1990 Curo positions.

May 2007 B. Hippen, technician, records of the CCHD/SO, set a 1 inch by 30 inch Aluminum tube with Aluminum cap in place of wood post point, down 0.5 foot, on centerline of County Road #145 and witnessed as follows:
8" Aspen N 50° E 61.78 feet 6'x6'x4' Rock N 5° W 42.00 feet
8" Aspen S 5° E 52.98 feet

July 2019 B. Hippen, technician, records of the CCHD/SO, found the 2007 monument and witnesses all good. The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by the CCHD/SO in 2007 is the correct perpetuation of this corner.

County Coordinates (Cass County North)

Northing 284282.93

Easting 399686.40