



A000693333

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

5/2/2023 10:10:41 AM

AS DOC #: A000693333

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER  
BY KF Dep TX#: 188768

I HEREBY CERTIFY THAT THIS DOCUMENT AND THE DATA  
CONTAINED HEREIN WAS PREPARED BY ME OR UNDER  
MY DIRECT SUPERVISION.

Guy T. Carlson 4/25/2023  
GUY T. CARLSON DATE

LICENSE NO. 40991

- LAND SURVEYOR
- PROFESSIONAL ENGINEER
- COUNTY SURVEYOR
- COUNTY ENGINEER

NAD 1983 (1996 HARN) CASS COUNTY NORTH ZONE COORDINATES  
N= 282193.832 E= 599247.056 US SURVEY FT  
(COORDINATES ARE SHOWN AS INFORMATION ONLY, SUBJECT TO VERIFICATION)

## CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

INDEX NO. G-17, QUARTER CORNER OF SECTIONS 10 & 11, TOWNSHIP 144, RANGE 25, 5TH P.M.  
STATE OF MINNESOTA, COUNTY OF CASS

AT THE CORNER LOCATION SHOWN ON THE SKETCH:

- ON 02/14/2023 FOUND A Steel Fence Post witness and Magnetic Reaction indicating the monument.  
DATE
- LEFT MONUMENT AS FOUND,  LOWERED MONUMENT,  REMOVED MONUMENT (EXPLAIN)
- ON \_\_\_\_\_ DATE PLACED A(N) \_\_\_\_\_



### SKETCH OF REFERENCE TIES

DECLINATION 1° EAST  
SKETCH NOT TO SCALE



T144-R25-S10

MONUMENT MARKED:

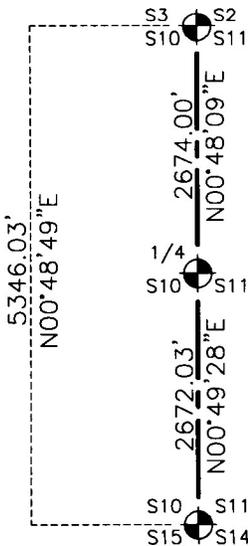

Magnetic Reaction that is  
unreachable over 5' below  
surface of water and mud.



3.80'  
EAST

(1985) Steel Fence Post, 1'  
below surface of water.

T144-R25-S11

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE



**STATEMENT OF EVIDENCE:** Quarter Corner of Sections 10 and 11, Township 144 North, Range 25 West, of the 5th Principal Meridian.

1876; This corner was originally established by Benjamin Baldwin, Deputy Surveyor under contract to the General Land Office (GLO), now the Bureau of Land Management (BLM). A copy of the plat of this township and hand copied field notes are on file in the Itasca County Surveyor's Office. These Field notes indicate a wood post was set to mark this corner position, with no trees near to witness.

1984/85; James Parker of Advance Surveying & Engineering Co. performed a Dependent Resurvey of T144N R25W for the United States Forest Service. Parker's field crew searched for but failed to find any evidence of this corner position. They set an aluminum rod with a stamped cap at a proportioned position between the southeast and southwest corners of Section 3. Mr. Parker then recorded a Certificate of Location of Government Corner as Doc. No. 281676 in the Cass County Recorder's Office. This corner position was witnessed by:

8' Steel Fence Post with sign 54-9                      EAST,                      3.8 feet

2023; Itasca County Township Field Book 1, page 48. Itasca County personnel searched for the corner position, getting a magnetic reaction through the ice at the approximate location. After chopping a hole through the ice, it was found to be a steel fence post standing vertically approximately 1' below the surface of the water. Another hole was cut through the ice at record bearing and distance from the found fence post. A magnetic reaction was received deep below the surface. The area was probed to approximately 5' below the water surface and into the mud but the monument was still out of reach. Geodetic coordinates were established on both the magnetic reaction and the fence post. There are no trees nearby that are suitable for witnesses.

***I accept this position as the best evidence as to the location of the original GLO position. Proper methods were utilized in the establishment of the monumented position.***

North American Datum 1983 (1996)  $\pm 0.003$  Arc seconds  
Latitude: 47° 18' 08.657"  
Longitude: 93° 49' 00.078"