

I HEREBY CERTIFY THAT THIS DOCUMENT AND THE DATA CONTAINED HEREIN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION.

Guy T Carlson 4/26/2023  
GUY T CARLSON DATE

LICENSE NO. 40991

- LAND SURVEYOR       PROFESSIONAL ENGINEER
- COUNTY SURVEYOR       COUNTY ENGINEER

NAD 1983 (1996 HARN) CASS COUNTY NORTH ZONE COORDINATES  
N= 274221.752 E= 607287.137 US SURVEY FT  
(COORDINATES ARE SHOWN AS INFORMATION ONLY, SUBJECT TO VERIFICATION)



**A000693336**

**OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON**

**5/2/2023 10:10:44 AM**

**AS DOC #: A000693336**

**PAGES: 2**

**REC FEES: 0.00**

**KATHRYN M. NORBY  
CASS COUNTY RECORDER  
BY KF Dep TX#: 188768**

## CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

INDEX NO. N-23,    QUARTER CORNER OF SECTIONS 13 & 24, TOWNSHIP 144, RANGE 25, 5TH P.M.  
STATE OF MINNESOTA, COUNTY OF CASS

AT THE CORNER LOCATION SHOWN ON THE SKETCH:

- ON 2/21/2023 FOUND A(N) Aluminum rod with a stamped aluminum cap.  
DATE
- LEFT MONUMENT AS FOUND,       LOWERED MONUMENT,       REMOVED MONUMENT (EXPLAIN)
- ON    DATE PLACED A(N)


### SKETCH OF REFERENCE TIES

DECLINATION 1° EAST  
SKETCH NOT TO SCALE



T144-R25-S13

MONUMENT MARKED:

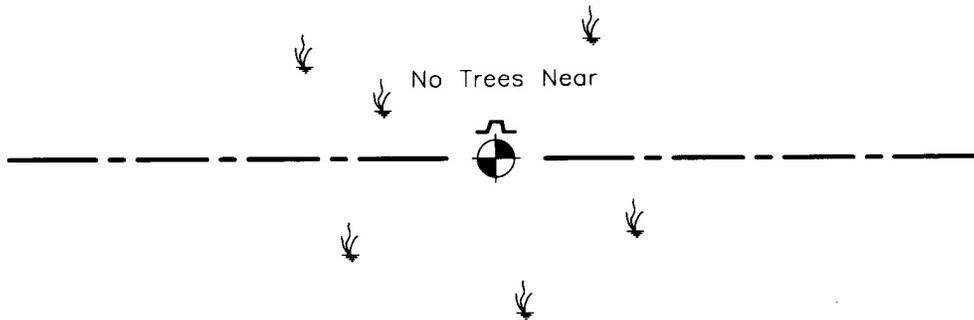

Page 1 of 2 A000693336

T144-R25-S24

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE

**STATEMENT OF EVIDENCE:** Quarter Corner of Sections 13 and 24, Township 144 North, Range 25 West, of the 5th Principal Meridian.

1876; This corner was originally established by Benjamin Baldwin, Deputy Surveyor under contract to the General Land Office (GLO), now the Bureau of Land Management (BLM). A copy of the plat of this township and hand copied field notes are on file in the Itasca County Surveyor's Office. These Field notes indicate a wood post was set to mark this corner position, which was not witnessed.

1984/85; James Parker of Advance Surveying & Engineering Co. performed a Dependent Resurvey of T144N R25W for the United States Forest Service. Parker's field crew searched for but failed to find any evidence of this corner position. They set an aluminum rod with a stamped cap at a proportioned position between the southeast and southwest corners of Section 13. Mr. Parker then recorded a Certificate of Location of Government Corner as Doc. No. 281947 in the Cass County Recorder's Office. This corner position was witnessed by:

8' Steel Sign Post with Sign 54-9                      EAST,                      3.6 feet

2023; Itasca County Township Field Book 1, page 53. Itasca County personnel searched for and found the aluminum rod and cap, up 3'. A magnetic reaction was received in the approximate location of the 1985 fence post but was not recovered due to the frozen ground. The monument was driven flush with the ground and a 4' steel fence post was set adjacent to the north. Geodetic coordinates were established on the monument. This corner position was witnessed as shown on the face of this document.

North American Datum 1983 (1996)  $\pm 0.003$  Arc seconds  
Latitude: 47° 16' 49.558"  
Longitude: 93° 47' 04.071"

