


T. 143 R. 31 M. 5th Coordinates: X _____ Y _____

N 1/4 5 Corner common to sections 5 and 32-144-31



● = Corner

EXISTING SURVEYS

Original Government Survey

Year surveyed 1875
Original monument Post

Original Evidence Found

Year of search 1915 by Gorman
Monument found Stake
Survey Rec. #471, Bk C, pg 486

Bearing Trees

Species	<u>Aspen</u>	<u>Aspen</u>
Diameter	<u>4"</u>	<u>3"</u>
Bearing	<u>S 75° E</u>	<u>N 8° W</u>
Distance	<u>40 links</u>	<u>47 links</u>

Original Bearing Trees Found

Species	<u>Aspen</u>	
Diameter	<u>stump</u>	
Bearing	<u>N 8° W</u>	
Distance	<u>31.02'</u>	

Subsequent Corner Restoration

Year surveyed 1903 By H. Dunaway, COE
Location filed: Leech Lake Reservoir map, T.143 N., R.31 W.
Monument: known corner per symbol on map.

Evidence of Subsequent Corner Restoration

Year of search 2/1905 By J.W. Curo, LS 1428
Location filed: Curo Book 42, page 2
Monument: Indicates corner

Bearing Trees, Reference Objects

Species	_____	_____
Diameter	_____	_____
Bearing	_____	_____
Distance	_____	_____

Bearing Trees, Reference Objects

Species	_____	_____
Diameter	_____	_____
Bearing	_____	_____
Distance	_____	_____

Subsequent Corner Restoration

Year surveyed 1/1915 By N.D. Gorman, Deputy Co Surv
Location filed: Survey Record #471, Book C, page 486 and Curo
Monument: Found the old stake
Curo Book 87, pages 6, 7, 16, 38 and 45, find old stake and
NW GLO stump, plainly marked, set hub/tack and witness.
Corner is 100.40' E. of center Great Northern Rail Road.
8" Poplar, S 18°10' W, 34.00'
7" Tamarack, N 73°47' W, 9.42'

Evidence of Subsequent Corner Restoration Found

Year of search Cir 1932 By MnDOT
Location filed: File 5-3_002 right of way map
Monument: U.S.G.L.O.S. monument 1 1/2" iron pipe/brass cap
82.5' W. of centerline Highway #371.
3/2005, T.L. Freeman, LS 21367
Certificate of Survey for Nitchals, #2665
Indicates a 2 1/2" Iron Pipe set in 1915 found.

11/1915, F.N. Molyneux, Assistant Engineer
Survey Record #471, Bk C, page 492 and Curo Bk 87, pg. 64
Set iron monuments at subdivision corners of Sec. 32.

12/1915, J.W. Curo, LS 1428, Cass County Surveyor
Survey of Section 32, Curo's Contract No. 3
Indicates 2.25"x 4' I.M., Known corner from old bearing trees.

5/1931, Hal D. Craig, U.S. Surveyor
Dependent Resurvey of a Portion T 144 N, R 31 W 1/4
at proportionate distance, no remaining evidence of S 32
original post or bearing trees. Set 2"x 36" iron post S 5
with brass cap, 30" in ground and referenced. 1931
6" Ash, N 78°45' E, 17 links(11.22')
8" Tamarack, S 85° W, 15 links (9.90')
2" Iron Pipe, N 14°45' W, 91 links(60.06') by Cass Co. Survey

9/2018, CCHD/SO
#2018.003
Found 2.25" ODIP w/plumber cap, up 1.6', 104'+/-, E. of
centerline Bike Trail, witnessed as follows.
5" Ash, S 14° E, 28.12' duplex nail, up 1.0', W. side
6" Maple, N 18° E, 45.73' duplex nail, up 1.0', E. side
12" Birch Clump, West, 32.83' duplex nail, up 1.0', S. side
2" GLO Pipe, S 14°30' E, 59.94'(1931) brass cap, up 1.1'

Index No. A7

CASS COUNTY LAND CORNER RECORD

T. 143 R. 31 M. 5TH Coordinates: X 5440 32-194-31 Y 5
 Corner common to sections 5 and 32-194-31

Original Government Survey
 Year surveyed 1875
 Original monument lost
 Bearing Trees Aspen 4" Aspen 3"
 Diameter 4" 3"
 Bearing N8W
 Distance 47ks 40cks


Subsequent Corner Restoration
 Year surveyed 1915
 By John Luo
 Location filed County RE SURVEY PLAT "E-66"
 Monument "1 1/2" x 4 1/2" Iron Monument
"1915, Johnson, Book C" p. 86 Two iron stake & NW
RT Stone SET Run & TACK 100' E of R.R. track
also on microfilm - roll 115 BR 87 p. 6-7, 16
 Bearing Trees, Reference Objects 2 1/2" 3" 4" 5" 6" 7" 8" 9" 10" 11" 12" 13" 14" 15" 16" 17" 18" 19" 20" 21" 22" 23" 24" 25" 26" 27" 28" 29" 30" 31" 32" 33" 34" 35" 36" 37" 38" 39" 40" 41" 42" 43" 44" 45" 46" 47" 48" 49" 50" 51" 52" 53" 54" 55" 56" 57" 58" 59" 60" 61" 62" 63" 64" 65" 66" 67" 68" 69" 70" 71" 72" 73" 74" 75" 76" 77" 78" 79" 80" 81" 82" 83" 84" 85" 86" 87" 88" 89" 90" 91" 92" 93" 94" 95" 96" 97" 98" 99" 100"

Subsequent Corner Restoration
 Year surveyed 1931
 By GTC
 Location filed County RE SURVEY PLAT "E-66"
 Monument "1 1/2" x 4 1/2" Iron Monument
"1915, Johnson, Book C" p. 86 Two iron stake & NW
RT Stone SET Run & TACK 100' E of R.R. track
also on microfilm - roll 115 BR 87 p. 6-7, 16
 Bearing Trees, Reference Objects 2 1/2" 3" 4" 5" 6" 7" 8" 9" 10" 11" 12" 13" 14" 15" 16" 17" 18" 19" 20" 21" 22" 23" 24" 25" 26" 27" 28" 29" 30" 31" 32" 33" 34" 35" 36" 37" 38" 39" 40" 41" 42" 43" 44" 45" 46" 47" 48" 49" 50" 51" 52" 53" 54" 55" 56" 57" 58" 59" 60" 61" 62" 63" 64" 65" 66" 67" 68" 69" 70" 71" 72" 73" 74" 75" 76" 77" 78" 79" 80" 81" 82" 83" 84" 85" 86" 87" 88" 89" 90" 91" 92" 93" 94" 95" 96" 97" 98" 99" 100"

Original Evidence Found
 Year of search _____ By _____
 Monument found _____
 Original Bearing Trees Found _____

Evidence of Subsequent Corner Restoration
 Year surveyed _____ By _____
 Location filed _____
 Monument _____
 Bearing Trees, Reference Objects _____

Evidence of Subsequent Corner Restoration
 Year surveyed 1931
 By GTC
 Location filed County RE SURVEY PLAT "E-66"
 Monument "1 1/2" x 4 1/2" Iron Monument
"1915, Johnson, Book C" p. 86 Two iron stake & NW
RT Stone SET Run & TACK 100' E of R.R. track
also on microfilm - roll 115 BR 87 p. 6-7, 16
 Bearing Trees, Reference Objects 2 1/2" 3" 4" 5" 6" 7" 8" 9" 10" 11" 12" 13" 14" 15" 16" 17" 18" 19" 20" 21" 22" 23" 24" 25" 26" 27" 28" 29" 30" 31" 32" 33" 34" 35" 36" 37" 38" 39" 40" 41" 42" 43" 44" 45" 46" 47" 48" 49" 50" 51" 52" 53" 54" 55" 56" 57" 58" 59" 60" 61" 62" 63" 64" 65" 66" 67" 68" 69" 70" 71" 72" 73" 74" 75" 76" 77" 78" 79" 80" 81" 82" 83" 84" 85" 86" 87" 88" 89" 90" 91" 92" 93" 94" 95" 96" 97" 98" 99" 100"

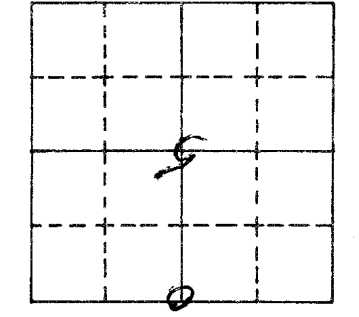

Subsequent Corner Restoration
 Year surveyed 1925 By Miss Hwy Dept.
 Location filed Clw map in Recorder's office - Walker to Cass Lake
 Monument 1 1/2" iron pipe & brass cap 82.5' W. of S
 Cert. of Survey showing monument found
T. Freeman # 21367 March 2005

Evidence of Subsequent Corner Restoration Found
 Year of search _____ By _____