



A000370596

HUBBARD COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

2/12/2014 1:59:00 PM

NICOLE K. LUETH  
HUBBARD COUNTY RECORDER  
BY RLB Dep PAGES: 2

WELL DISCL RECD \_\_\_\_\_  
MTG REG TAX PD \$  
DEED TAX PD \$

I HEREBY CERTIFY THAT THIS SURVEY, PLAN,  
OR REPORT WAS PREPARED BY ME OR UNDER  
MY DIRECT SUPERVISION, THAT THE UNITED  
STATES PUBLIC LAND SURVEY MONUMENT  
RECORD IS CORRECT AND COMPLETE TO THE  
BEST OF MY KNOWLEDGE AND BELIEF, AND  
THAT I AM A DULY LICENSED LAND SURVEYOR  
UNDER THE LAWS OF THE STATE OF MINNESOTA.

 1-31-14  
SIGNATURE DATE

REGISTRATION NO. 15810

LAND SURVEYOR  COUNTY SURVEYOR


### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W.C.M.C. #7 ON E. LINE OF SECTION 25, TOWNSHIP 144, RANGE 32, 5TH P.M.

STATE OF MINNESOTA, COUNTY OF HUBBARD  
AT THE CORNER LOCATION SHOWN ON THE SKETCH:

- ON 3-16-12 FOUND A(N) 2" IRON PIPE WITH BRASS CAP  
DATE
- LEFT MONUMENT AS FOUND,  LOWERED MONUMENT,  REMOVED MONUMENT (EXPLAIN)
- ON \_\_\_\_\_ DATE PLACED A(N) \_\_\_\_\_

#### SKETCH OF REFERENCE TIES

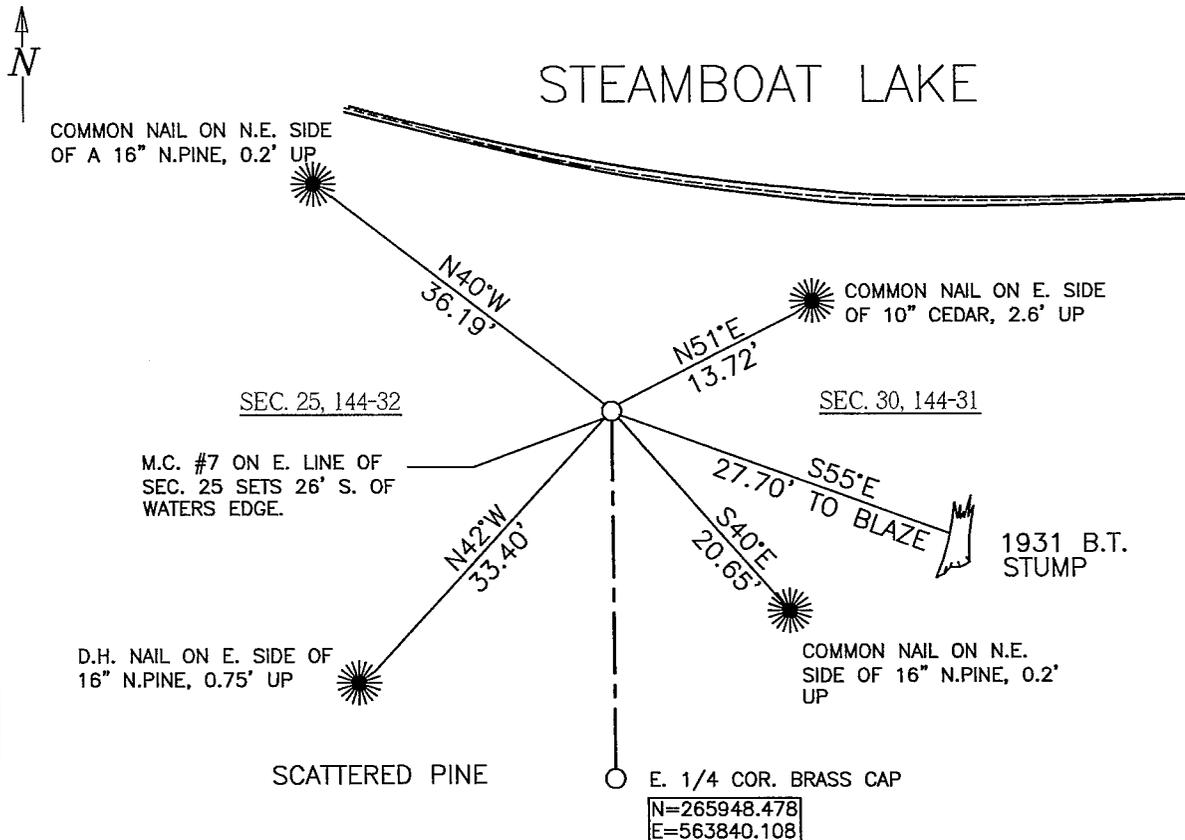

NAD 83 (96 ADJ.) HUBBARD COUNTY COORDINATES

N= 266037.103 E= 563839.589 (COORDINATES ARE SHOWN AS INFORMATION ONLY, SUBJECT TO VERIFICATION.)

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE

Statement of Evidence:

Meander Corner No. 7 on the East Line of Section 25, Township 144 North, Range 32 West of the 5th Principal Meridian.

In 1871, the original Government Surveyors set a wood post in place to mark the location of this corner and established bearing trees as follows: a 10" Yellow Pine, S58°E 42 links and a 10" Yellow Pine, N43°W 90 links.

In 1931, the United States Government did a dependent resurvey and subdivision of sections, remarking Indian Allotment Corners in T144N, R31W. Hal D. Craig, U.S. Gov't Surveyor ran north from the E $\frac{1}{4}$  corner of section 25 the original G.L.O. distance of 1.63 chains to the true point for M.C. No. 7. This point falls on the low beach which is unsafe for a corner on account of ice movement. He found no evidence of the original post or bearing trees which apparently have been uprooted by shifting ice. Craig set a witness corner to M.C. no. 7 which is 28 links South of the true corner and 1.35 chains North of the E $\frac{1}{4}$  corner of section 25. He set a brass capped iron post, 3' long, 2" dia. and 30" in the ground to mark this witness corner and established new B.T.'s as follows: a 6" Norway Pine, S41°30'E 31 $\frac{1}{2}$  links and a 8" Norway Pine, N41°15'W 55 links. (1931 survey information on file in Hubbard County Survey Dept.)

In 1989, the Hubbard County Survey Dept. went to M.C. No. 7 and found the brass capped iron that Craig set in 1931 for the witness corner. The found corner was 6" above ground and very solid. We also found Craig's N.W. B.T. live and green and the stump of his S.E. B.T. We left the found witness monument in place and accepted it as a valid reconstruction of an accessory to the true location of M.C. No. 7.

In 2012 the Hubbard County Survey Department performed routine maintenance on this previously certified corner. Hubbard County 1996 Adjusted Coordinates were collected and any additions or changes to the topographic features were made and are shown on the front of this certificate. The original position of this corner was not altered.