

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter _____ Corner of Section 8, Township 134, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On Oct., 1993 placed a 1/2" iron pipe monument capped RLS No. 16097
DATE

SKETCH OF REFERENCE TIES

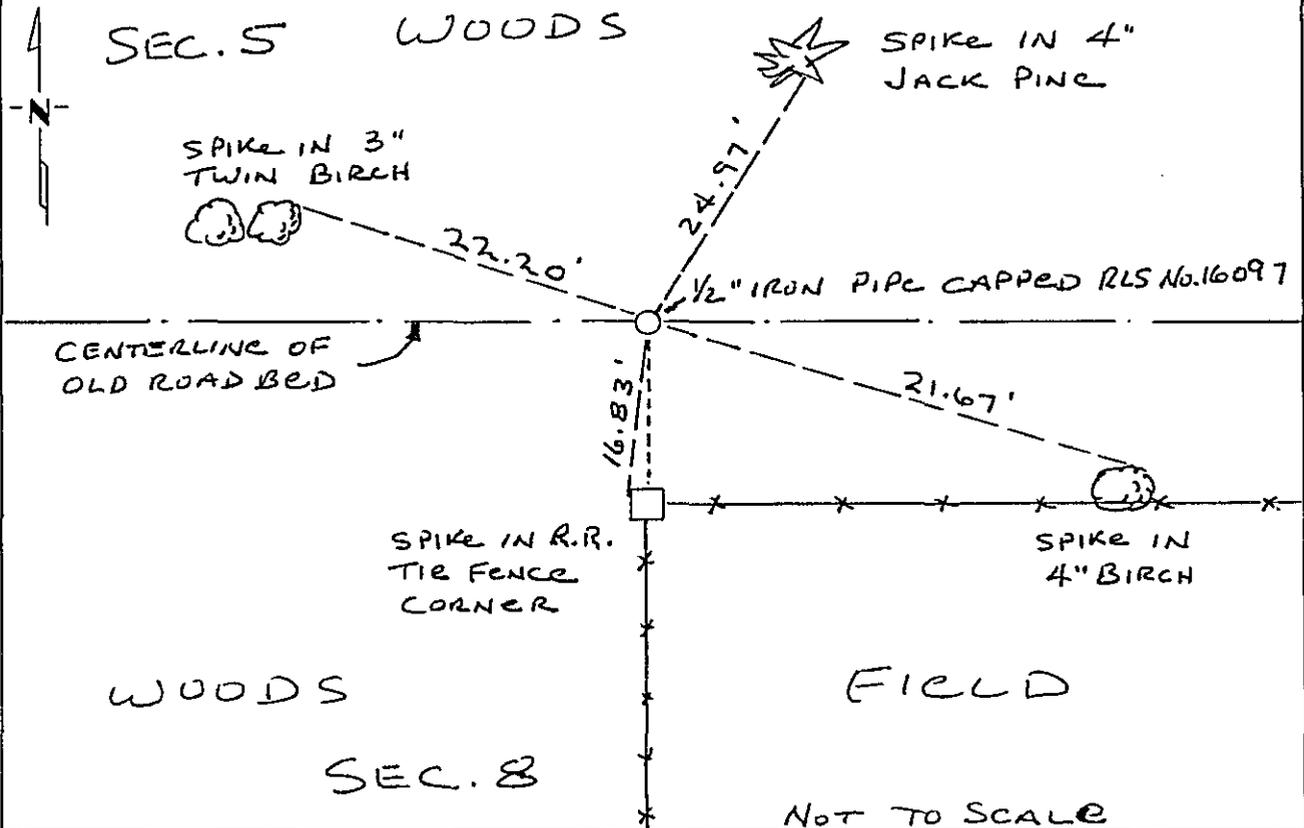

Statement of evidence relative to this corner location is on back of page. 357103

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] APRIL 18, 1994
SIGNATURE DATE

Registration No. 16097

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 10:40 A.M. on the 26th day of APRIL A.D., 1994

County Recorder Claudia Kaylar
By N.S. Deputy

DOCUMENT NO. 357103

Statement of Evidence:

The North Quarter corner of Section 8, Township 134, Range 31, 5th Principal Meridian, Cass County, Minnesota, was set under the Public Land Survey as a post with 2 bearing trees in 1869. No traces of post or bearing trees now exist.

The County Surveyor's Office was contacted and corner card information was obtained.

In 1993, while surveying the perimeter of Section 5, the obliterated position for the south quarter corner of Section 5, being also the north quarter corner of Section 8, was searched at the point of intersection with an east-west road bed and a fence line south. This area was hand dug and scanned with a metal detector. No evidence of the corner was found. This obliterated position fits reasonably well with distances measured east and west to the southeast and southwest corners of Section 5 and is accepted as the position for the north quarter corner of Section 8. A 1/2" iron pipe capped RLS No. 16097 was set at this position.