

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 28, Township 138 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4-6-1998 Placed a DNR Survey Marker 0.2' above the water surface in the
DATE centerline of an old 2' wide ditch

SKETCH OF REFERENCE TIES

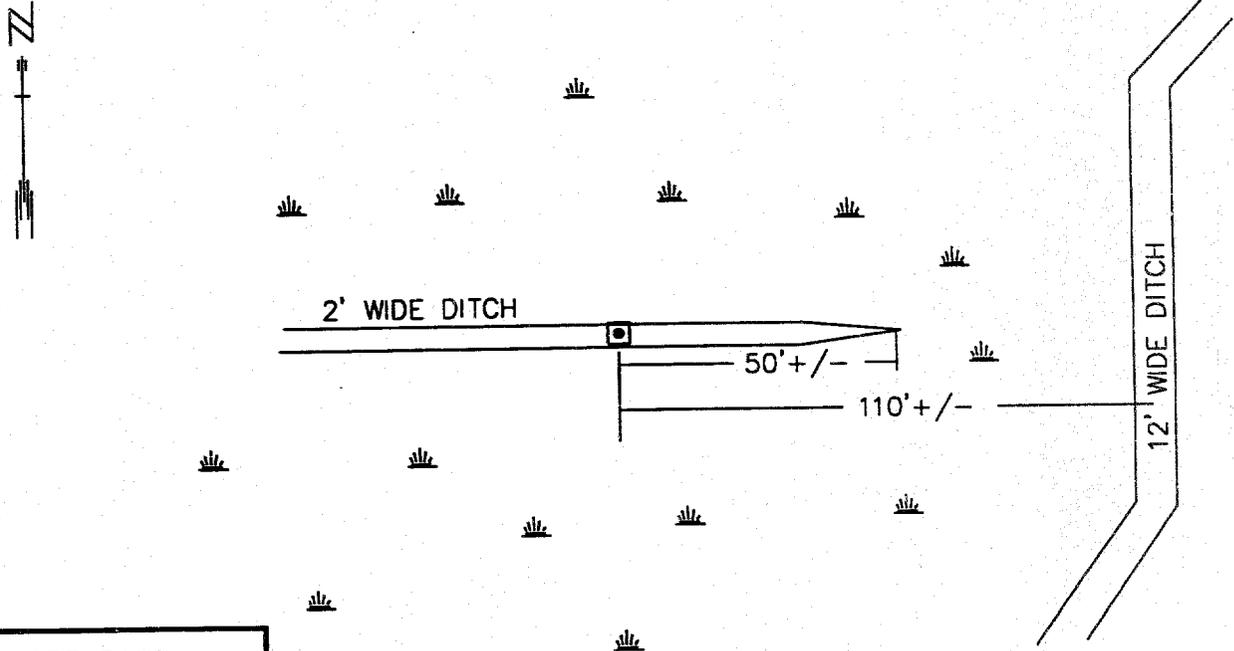

NAD83 CASS
CO. COORDINATES

N 312936.540
E 530707.762

Statement of evidence relative to this corner location is on back of page.

DATE 4/30/98
FILE FOM01863

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 4/30/98
SIGNATURE DATE

License Number 16098

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER 408861
County of Cass

I hereby certify that this document was filed in the Co. recorders office at 2:10 P.M. on the 14th day of January A.D., 1999

County Recorder Claudine Kaylor
By K.J., Deputy

DOCUMENT NO. 408861

East Quarter Corner Section 28, Township 138 North, Range 29 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
Cass County Surveyor
Widseth, Smith and Nolting of Brainerd
Landecker and Associates of Pequot Lakes
Landecker and Associates of Walker
Central Minnesota Surveying

1865 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing tree was marked:

Tamarack 8" N 35° W 199 links (131.34')

1998 The DNR survey crew located an east - west road through section 28 and searched the corner area. There is a old east - west ditch in the vicinity. The road angles to the east southeast from the west quarter corner and is approximately 70' southerly of the quarter line at the east end of the road. The lost position between the section corners was computed and a Department of Natural Resources Survey Marker was set to mark the corner. It fell in the center of the old east - west ditch. There were no good ties available. The distance to the section corners north and south is 2649.57 feet.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425