

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast corner of Section 28, Township 133 N., Range 29 W., 5th P.M.
 State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 26 March '08 found a Cass County Cast Iron monument, down 0.4 foot,
on hill top, 4 feet± northeast of fence corner.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

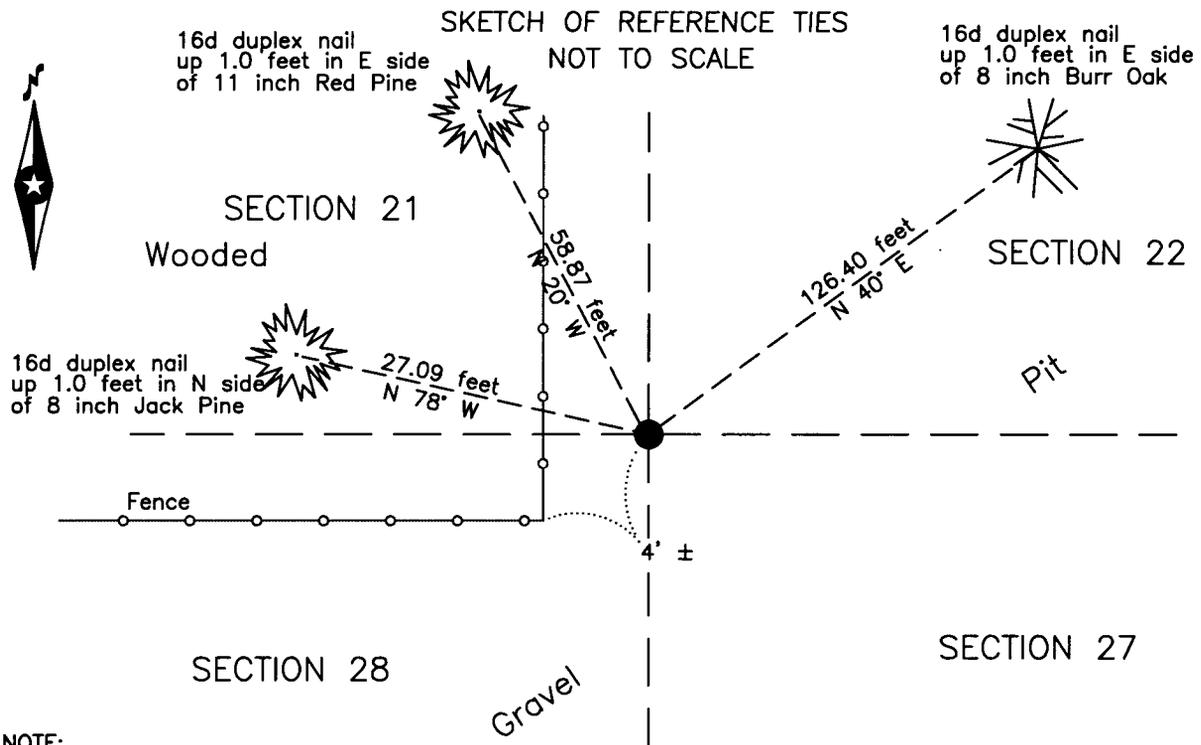


NOTE:
 All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.


 Terry L. Freeman, Cass County Surveyor
 Date 7/24/13 MN License No. 21367



A000594821

**OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON**

7/25/2013 3:07:36 PM

AS DOC #: A000594821

**PAGES: 2
 REC FEES: 0.00**

**KATHRYN M. NORBY
 CASS COUNTY RECORDER**

BY SR Dep

Page 1 of 2 A000594821



Index No. R.0-13.0

Statement of Evidence

Northeast corner of Section 28, Township 133 North, Range 29 West, 5th Principal Meridian.

Aug 1870 T.Walker, General Land Office (GLO) Deputy Surveyor in the notes of the subdivision of Township 133 North, Range 29 West, set a post for the original corner and referenced it as follows:

3" Birch N 25° W 87 links (57.42 feet) 4" Oak S 31° E 29 links (19.14 feet)

3" Oak S 54 1/4° E 41 links (27.06 feet) 8" Bl. Pine N 48° E 242 links (159.72 feet)

Said records are on file with the Secretary of State, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).

Nov. 1905 W.H.Hallett, Township Road Order, Surveyor's Report, on file in the CCSO, indicates subject corner.

1925 Minnesota Power & Light Co., Sylvan – Pillager H.E Development, Land and Flowage Survey, on file in the CCSO, by symbol indicates the subject corner to be existing.

Aug. 2006 J. Kramer, LS 23668, Certificate of Survey on file in the Kramer Leas Deleo, Baxter Office, indicates a position for the subject corner.

March 2008 B.Hippen, technician, records of the CCSO, found a Cass County Cast Iron Monument with brass disk, down 0.4 foot, on hill top and witnessed as follows:

8" J. Pine N 78° W 27.09 feet 11" N. Pine N 20° W 58.87 feet

8" B. Oak N 40° E 126.40 feet

July 2013 B.Hippen, technician, records of the CCSO, found a Cast Iron Monument and 2008 witnesses. The recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the Monument recovered in 2008 by the CCSO is the accepted location for this corner.