



A000653988
OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
 10/3/2019 1:58:56 PM
 AS DOC #: A000653988
 PAGES: 2
 REC FEES: 0.00
KATHRYN M. NORBY
CASS COUNTY RECORDER
 BY NG Dep TX#: 156876

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trotter

Patrick A. Trotter


Date: 9-25-2019 License No: 41002
 PLS# 41002

Northeast Corner of Section 29, Township 137 N, Range 31 W, 5th P.M.

On _____ found a _____
 left monument as found, lowered monument, removed monument (explain)
 On 9-10-2019 placed a 1/2" x 18" iron pipe with plastic cap stamped "RLS 41002" as a reference monument lying 228.38' south of calc. position

SKETCH OF REFERENCE TIES

Corner Index:
R.0-9.0

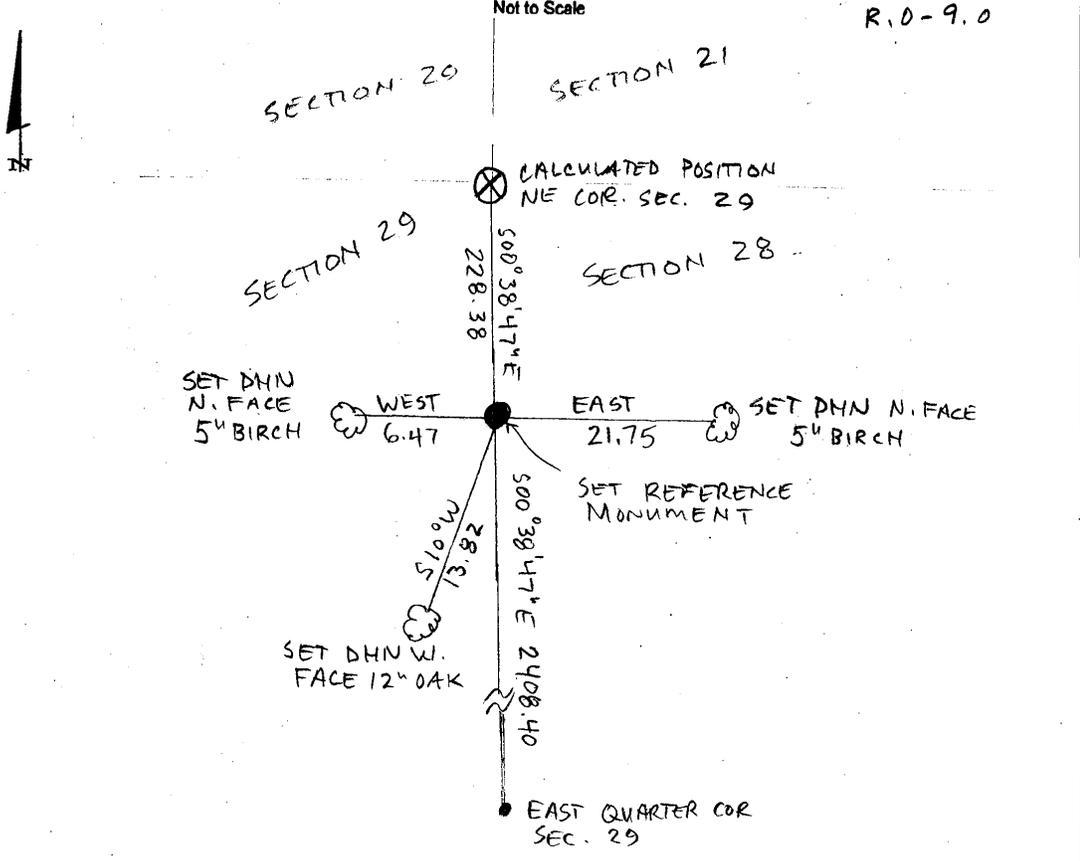



R.0-9.0

Statement of Evidence

**Northeast corner, Section 29, Township 137 North, Range 31
West, 5th Principal Meridian, Cass County, Minnesota**

1870 – R. Cronk, General Land Office (GLO) Surveyor originally established this corner position while surveying the interior subdivision lines of Township 137 North, Range 31 West. A wood post was set to mark a witness corner position 5 chains south of true corner position with the following witnesses:

4” N. Pine S 30° E 16 links
3” N. Pine S 75° W 14 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

2019 – Patrick A. Trottier, RLS 41002 finds no evidence of corner and determines position by double proportion method utilizing the NE corner of Section 25, T137N R32W and the NE corner Section 28, the SE corner Section 32, and the NE corner of Section 20, all in T137N R31 W. Sets 1/2" x 18" iron pipe with plastic cap stamped "RLS 41002" as a reference monument to the true corner, lying 228.38 feet south of true corner and on east line of Northeast Quarter, said section, and establishes the witnesses to the reference monument as shown on the face of this drawing.

County Coordinates (Cass County South NAD83/96)

Calculated corner position:

Northing 283492.39
Easting 461681.24

Reference monument position:

Northing 283264.02
Easting 461683.81