

CORNER  
RESTORATION  
T149N R27W

KS  
FIELD BOOK

820012

BOOK NO.3

CORNER RESTORATION T149N R27W B3

DIS

cut

Cut or  
Fill0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40

KEUFF

T149N - R27W

Block #3

6	5	79	4	62	3	45	2	25	1
		77	78	60	61	43	44	32	
7	8	76	9	59	10	42	11	21	12
		74	75	57	58	40	41	18	
18	17	73	16	56	15	39	14	15	13
		71	72	54	55	35	36	13	14
19	20	70	21	53	22	34	23	12	24
		68	69	51	52	30	33	10	11
30	29	67	28	50	27	24	26	9	25
		65		48	49	27	28		1
31	32		33	47	34	26	35	5	36

1/4 Between Secs. 25+36

Original Gov't. survey notes of 1875

Set Post

Tamarack 15" S75°E 30 Iks - 19.80'

Tamarack 10" S42°N 35 Iks - 23.10'

West

42.00 Leave swamp N+S

64.00 Enter meadow N+S

67.80 Below stony River

Cut or  
Fill

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40

M.C. Between Secs. 25+26

Original Gov't. survey notes of 1875

Set Post

Aspen 12" N50°E 220 1Xs - 145.20'

N. Pine 12" S85°E 325 1Xs - 214.50'

West

71.50 Bowstring River

80.00 Set Post

Cut or Fill  
0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34

M.C. & Sec. Cor. to 25, 26, 35, 36

Original Gov't. survey notes of 1875

Set Post

N. Pine 15" N87°W 9/15 - 5.94'

North

8.70 Bowstring River

Cut or  
Fill

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34

M.C. Between Secs. 35+36

Original Gov't. survey notes of 1875

Set Post

Elm 7" SHOE 96 IKS- 63.36'

4  
South

8.70 Enter Marsh

40.00 '19 Cor.

Cut or  
Fill

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34

KEUP

X-21

South  
48.30 Lake

1/4 Between Secs. 35+36

Original Gov't. survey notes of 1875

Set Post

No Bearing Trees

Cut or  
Fill

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34

M.C. Between Secs. 25+26

Original Govt. survey notes of 1875

Set Post

N. Pine 16" N67°W 480 1K5- 316.80'

North

2.00 Bowstring River

Cut or  
Fill

- 0
- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25
- 26
- 27
- 28
- 29
- 30
- 31
- 32
- 33
- 34
- 35
- 36
- 37
- 38
- 39
- 40

M.C. Between Secs. 25 + 26

Original Gov't. survey notes of 1875

Set Post

No Bearing Trees

North

20.00 Bowstring River

Cut or  
Fill

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40

KEUP

M.C. Between Secs. 25 + 26

Original Govt. survey notes of 1875

Set Post

J. Pine 20" N3°E 720 lks - 475.20'

North

25.00 Leave meadow E+W

40.00 1/4 Cor.

Cut or  
Fill

- 0
- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25
- 26
- 27
- 28
- 29
- 30
- 31
- 32
- 33
- 34

1/4 Cor. Between Secs. 25 + 26

Original Gov't. survey notes of 1875.

Sec Post

N. Pine 24" N88°E 552 IKS - 363.00' 36.3

N. Pine 26" S64°W 146 IKS - 96.36'

North

46.00 Enter tam. swamp NW + SE

57.00 Leave swamp E + N

71.00 Enter Tam. swamp E + W

78.00 Leave swamp E + W

80.00 Sec. Cor.

6/8/89-GB Measured south from swamp call to the north of 1/4 Cor. 400'. Approx. corner position ends up on the southern side of a <sup>furrowed</sup> Red Pine Plantation. Found 3 large, but badly burned pine stps. South-westerly approx. 125'. A few other scattered pine stps. found in search area have been burned badly. Tied ribbons up for approx. corner position. Approx. corner position is west of FS. road 2525 approx. 75'.

Sec. Cor. to Secs. 23, 24, 25, 26

Original Gov't. survey notes of 187

Set Post

Fir 7" S56°E 24 IKS - 15.84'

R. Pine 8" S16°W 6 IKS - 3.96'

R. Pine 8" N85°W 67 IKS - 44.22'

N. Pine 12" N85°E 62 IKS - 40.92'

EAST

18.00 Enter Tom. swamp NW + SE

19.00

24.00 Leave swamp NW + SE

40.00 Set temp. post

40.03 1/4 Cor.

1/4 Between Secs. 24 & 25

Original Gov't. survey notes of 1875

Set Post

Aspen 12" N63°E 181Ks - 11.88'

Blaswood 7" S40°W 171Ks - 11.22'

NOTES AT ITASCA COUNTY RECORD BOOK 2

1909

1/4 CORNER MARKED NEW B.T'S.

POPLAR 14 N14°30'W 34.0'

POPLAR 14 S9°30'E 35.0'

23   24	2624.5'	1/4	2630'	24   19
26   25				25   30

North

24.50 Creek 660' wide

40.00 1/4 Cor.

1  
 1/4 Between Secs. 23 + 24

Original Govt. survey notes of 1875

Set Post

N. Pine 24" N51°W 701ks - 46.20'

Aspen 24" N18°E 681ks - 44.80'

Aspen 12" S53°E 121' ks -

N. Pine 24" S38°E 341ks.

North

80.00 Sec. Cor

N-21  
Sec. Cor to 13-14-23-24

Original Gov't. survey notes of 1875

Set Post.

Aspen 6" N72°W 40 IKS - 26.40'

Aspen 7" N10°E 49 IKS - 32.34'

Aspen 12" S53°E 124 IKS - 81.84'

N. Pine 24" S38°W 34 IKS - 22.44'

See Book #1, page 33, 68

13  
EAST

7.00 Enter Tam. swamp N+S

20.00 Leave swamp N+SE

36.00 Enter Tam. swamp N+S

40.00 Set temp. post

56.00 Leave swamp N+S

1/4 Between Secs. 13 & 24

Original Gov't. survey notes of 1875

Set Post . . .

Cedar 7" S6°W 43 1/2s - 28.38'

Tamarack 12" N14°W 72 1/2s - 47.52'

See book 1, Page 49

North

40.00 1/4 Cor.

1/4 Between Secs. 13 & 14

Original Gov't. survey notes of 1875

Set Post

Aspen 12" N32°W 13 lks - 8.58'

N. Pine 16" East 48 lks - 31.60'

See book #1 page 50

North

47.50. Creek 5.28' runs W

57.50 Enter river bottom NE & SW

63.20 Bowstring River

M.C. Cor. Between Secs. 13+14

Original Govt. survey notes of 1875

Set Post

W. Birch 8" S76°W 535 1/2 - 853.10'

North

69.50 Bowstring River

M.C. Between Secs. 13 + 14

Original Gov't. survey notes of 1875

Set Post

Aspen 18" N28°W 535 IKS - 353.10'

North

80.00 Sec. Cor.

Sec. Cor to 11-12-13-14

Original Govt. survey notes of 1875

Set Post

N. Pine 20" S67°W 252 1/2 - 166.32'

Aspen 8" N87°W 230 1/2 - 151.80'

R. Pine 14" N88°E 276 1/2 - 182.16'

See Book #1, page 48

EAST

.50 Creek 13.20' runs S

2.50 Leave meadow N+S

6.50 Enter swamp N+S

11.30 Lake

M.C. Between Secs. 12 & 13

Original Gov't survey notes of 1875

Set Post

Aspen 18" N77°W 490 1K5- 323.40'

West

2.00 Leave swamp N+S

33.50 Lake

M.C. Between Secs. 12 & 13

Original Gov't. survey notes of 1875

Set Post

Aspen 7" N57E 54 1/2 - 35.64'

Aspen 6" S88°E 62 1/2 - 40.92'

20  
North

.20 Creek 13.20' runs NW

6.50 Leave meadow NW & SE

40.00 1/4 Cor.

1/4 Between Secs. 11 & 12

Original Gov't. survey notes of 1875

Set Post

N. Pine 20" N26°W 168 1/5 - 110.88'

N. Pine 18" N16°E 300 1/5 - 198.00'

North

80.00 Sec. Cor.

Sec. Cor. to 1-2-11-12

Original Gov't. survey notes of 1875

Set Post

Oak 12" S51°W 21 IKS- 13.86'

Aspen 7" N46°W 30 IKS- 19.80'

Aspen 7" N44°E 38 IKS- 25.08'

Oak 9" S73°E 36 IKS- 23.76'

SEE BOOK 1 PAGE 75

(MONUMENTED)

East

19.40 Lake

M.C. Between Secs. 1 & 12

Original Gov't. survey notes of 1875

Set Post

W. Pine 10" S34°W 171Ks - 11.22'

West

1800 M.C.

M.C. Between Secs. 1 & 12

Original Gov't. survey notes of 1875

Set Post

N. Pine 15" S46°E 65 IKS - 36.30'

Aspen 6" N13°E 35 IKS - 23.10'

North

40.00 Set temp. post

64.00 Enter tam. swamp NE & SW

80.34 Intersect line 29.04' W. of cor. in swamp

1/4 Between Secs. 1+2

Original Gov't. survey notes of 1875

Set Post

N. Pine 16" S20°E 205 IKS - 135.30'

Aspen 6" N20°W 24 IKS 15.84'

North

36.00 Enter Tam. swamp NW+SE

40.00 1/4 Cor.

1/4 Between Secs. 34 + 35

Original Gov't. survey notes of 1875.

Set Post

Spruce 6" S65°W 8 1/2 - 5.28'

Spruce 8" S42°E 10 1/2 - 6.60'

North

57.00 Leave swamp NW & SE

80.00 Sec. Cor.

Sec. Cor. to 26-27-34-35

Original Gov't. survey notes of 1875

Set Post

Aspen 10" S58°E 35 LKS - 23.10'

Aspen 12" N32°E 30 LKS - 19.80'

Elm 4" N64°W 25 LKS - 16.50'

Elm 12" S23°W 10 LKS - 6.60'

874 CCC NOTES BY ROY NELSON 2-4-35

Fd. ? STUMP S52W 44 LKS. = 29.04'

ASPEN 16 S64E 103 LKS. = 67.98'

ELM 8 N64E 72 LKS. = 47.52'

LOCATION POSTER ON REGULAR POST

ON SW IN SEC. 26 - CORNER BEARS S62W-15 LKS. <sup>=4.9'</sup>

ITASCA COUNTY SURVEY RECORDS FOR SURVEY  
OF ALYWOOD - BIG FORK ROAD

ELM 7 N44E 46.8'

ELM 6 N39W 50.2'

ASPEN 13 S74E 65.0'

ASPEN 13 S42W 30.0'

East

31.00 Enter Tam. swamp N+S

37.50 Leave swamp NW & SE

40.00 Set temp. post

SEE BOOK #1 Pg. 64

VA Between Secs. 26 & 35

Original Govt. survey notes of 1875

Set Post

N. Pine 10" N18°E 15 IKs - 9.90'

Aspen 15" S13°W 30 IKs - 19.80'

North

40.00 1/4 Cor.

1/4 Between Secs. 26 & 27

Original Gov't. survey notes of 1875

Set Post

N. Pine 8" N36°E 60 IKS - 39.60'

N. Pine 12" West 45 IKS - 29.70'

T-17

North

58.50 Enter Tam. Swamp NW & SE

80.00 Sec. Cor.

11-13-85 JA-BT

USED E.D.M. FROM NE COR. SEC. 27 WHICH IS  
USFS BRASS CAPPED IRON PIPE AT SEC. COR.

MEASURED SOUTH DOWN ROAD TO APPROX. SE COR.

SEC. 27 WHICH ROAD INTERSECTION OF ROADS

N+S AND FR. TO WEST - DISTANCE MEASURED

WAS 5085' - SET APPROX. 1/4 COR. BET. SEC'S,

26 & 27 AT 2542.5' IN CENTER OF COUNTY

ROAD #126 - PLACED FSLP ON JACK PINE 11"

EAST 57' FROM APPROX. COR. IN ROAD

29

Sec. Cor. to 22-23-26-27

Original Gov't survey notes of 1875

Set Post

Cedar 4" N53°W 40 IKs - 26.40'

Cedar 6" S64°W 62 IKs - 40.92'

Fir 10" S23°E 23 IKs - 15.18'

East

4.50 Leave swamp NYS

40.00 Set temp. post

51.00 Bowstring River

61.25 Bowstring River

80.00 Intersect line 46.20' S. of Cor.

M.C. Between Secs. 23+26

Original Gov't. survey notes of 1875

Set Post

N. Pine 14" N50°E 92 1Ks- 60.72'

N. Pine 16" S73°E 136 1Ks- 89.76'

EAST

23.00 Bowstring River

M.C. Between Secs. 23 & 26

Original Gov't. survey notes of 1875

Set Post

N. Pine 10" S20°W 50 IKS - 33.00'

N. Pine 8" S87°W 60 IKS - 39.60'

EAST

40.00 1/4 Cor.

1/4 Between Secs. 23 & 26

Original Govt. survey notes of 1875

Set Post

N. Pine 14" S35°E 25 IKS - 16.50'

Aspen 5" N10°E 20 IKS - 13.20'

SEE BOOK #1 Pg. 30

North

24.00 Leave Swamp NNE

35.50 Enter Lam. Swamp

40.00 1/4 Cor.

1/4 Between Secs 22 & 23

Original Gov't. survey notes of 1825

Set Post

Tamarack 8" N45°W 32 1/5 - 21.12'

Tamarack 8" S20°E 28 1/5 - 18.48'

North

41.30 Pond

46.50 Pond

80.00 Sec. Cor.

Sec. Cor. to 14-15-22-23

N-17

Original Gov't. survey notes of 1875

Set Post

N. Pine 18" S33°E 35 IKS - 23.10'

N. Pine 22" S20°W 27 IKS - 17.82'

N. Pine 24" N79°W 22 IKS - 14.52'

N. Pine 24" N18°E 48 IKS - 31.68'

See Book #1 page 4 for monumentation

# CERTIFICATE FILED

35

East

21.40 Bowstring River

25.40 Set temp. M.C.

33.00 Leave meadow NE & SW

40.00 Set temp. post

43.00 Enter tam. swamp N & S

49.00 Leave tam. swamp N & S

79.40 Intersect line 39.60' W. of Cor.

N-19

1/4 Between Secs. 14 & 23

Original Gov't. survey notes of 1825

Set Post

N. Pine 12" N36°E 87 1/2 - 24.42'

Spruce 6" S10°W 72 1/2 - 47.52'

EAST

54.00 Bowstring River

M.C. Between Secs. 14 & 23

Original Gov't Survey notes of 1875

Set Post

Tamarack 8" S88°E 7.85 / KS - 5.18'

EAST

58.00 River

M.C. Between Secs. 14 & 23

Original Government survey notes of 1875

Set Post

Aspen 6" NB4°W 161 115-106.26'

Aspen 6" SB3°W 158 115-104.28'

North

34.80 Creek runs E.

36.50 Creek

40.00 1/4 Cor.

1/4 Between Secs. 14+15

Original Govt. survey notes of 1875

Set Post

Aspen 7" N81°W 78 IKS - 51.48'

Willow 7" East 27 IKS - 17.82'

North

62.50 Leave meadow E+W

68.50 Enter tom. swamp E+W

79.00 Leave tom. swamp E+W

80.00 Sec. Cor.

Sec. Cor. to 10-11-14-15

Original Gov't. survey notes of 1875

Set Post

W. Birch 7" S13°W 12 1/2 - 7.92'

W. Birch 8" S73°E 13 1/2 - 8.58'

W. Birch 6" N10°E 16 1/2 - 10.56'

W. Birch 7" N89°W 13 1/2 - 8.58'

6/8/88 KEN WHITE HORN & CREW WITH GARY BRAMA  
SEARCHED AGAIN AND FOUND POSITION OF OLD POST POINT  
KEN ACCEPTS EVIDENCE AS FOUND AND SETS COUNTY MONU.  
SET COUNTY MOUNTMENT WITH ALUM CAP MARKED

T149N R27W

510 511  
515 514  
1988

RLS NO 14677

WITNESSED BY				
CEDAR	23	N34W	98.48'	MKD 510 BT
CEDAR	13	N79W	78.67	" 510 BT
CEDAR	10	S68W	64.26	" 515 BT

8' STEEL SIGN POST NORTH 4.0'

DOCUMENT # 400653

J-17

# CERTIFICATE FILED

40

EAST

4.50 Enter tam. swamp N+S

15.50 Leave tam. swamp N+S

40.00 Set temp. post

5/27/88 CK-GB

FROM DOOR FIRE TOWER SITE WE RAN LINE AT S69°W-1067'  
TO SEARCH AREA - FD. LARGE BIRCH STUB LYING ON GROUND WITH  
OLD FSLP ON UNDERSIDE OF BIRCH LOG - FROM THIS BIRCH STUB  
WE MEASURE 8.6-S85W TO LOCATION OF POST - NO POST FD.  
AT THIS TIME - FD. LARGE BIRCH WINDFALL 23' W OF COR - THAT  
HAD BEEN BLAZED E+W-S - COR ON KNOLL IN ASPEN CUTOVER  
SET 3X3X6' CEDAR POST AT CORNER LOCATION AND PLACE  
FSLP ON 12 CEDAR N77W - 79.0' FROM CEDAR POST  
NO EVIDENCE OF ORIG. BT'S TODAY  
OUR LINE FROM TOWER SITE FELL 6' SOUTH AND 8' SHORT  
OF CEDAR POST - LINE FROM TOWER HILL WAS VERY STEEP  
THIS COULD ACCOUNT FOR DIFFERENCE IN DISTANCE  
CORNER IS 110'E OF CEDAR SWP. NW-SE

874 CCC NOTES BY H. McLAUGHLIN - NO DATE  
FD. POST (SCRIBED) 24" HIGH - POOR CONDITION  
NO BT'S

PLACED FSLP ON BIRCH 10 ON EAST SIDE OF  
SECTION CORNER - CORNER BRS. N11°E 13 1/2 -  
8.58'

CORNER LOCATED ON BIRCH + BALSAM KNOLL  
NORTH FROM TAM. + SPRUCE SWAMP

J-19  
1/4 Between Secs. 11 & 14

Original Gov't. survey notes of 1875

Set Post

Maple 10" N64°E 12 IXS- 7.92'

Ironwood 9" S76°W 10 IXS- 6.60'

41  
North

40 00 1/4 Cor.

4/11/90 GB-CK

FROM CO. IRON PIPE AT NE COR. TO SEC. 14 - RAN LINE AT DUE WEST ALONG LINE OF OLD BLAZES - AT 1111' W PLACE FSLP ON L. W. OAK ON EAST SIDE OF FR #3338 - CONTINUE WEST TO OLD TAG ON 8" ELM (NO DATE OR WHO) ELM BLAZED E+W AT STA 1340' W - CONTINUE WEST THROUGH OPEN HARDWOODS AND ROLLING COUNTRY TO STA. 2680' W - FD. OLD TAG (NO DATE OR WHO) ON 16" MAPLE OUR LINE FELL 1.5' SOUTH OF TAG SCAR OR SEAM ON WEST SIDE OF TAGGED MAPLE ALSO 4 OLD BLAZES - AT BRG S64°W - B.O. FOUND DEPRESSION IN GROUND NO TRACE OF IRONWOOD BT

7/12/90

SEARCH AGAIN - CUT INTO LARGE OLD DOWN MAPLE - CUT UP WITH CHAIN SAW NOTHING FOUND INSIDE OLD MAPLE'S. PUT FSLP ON 16" MAPLE WITH OLD TAG AS APPROX. COR.

G-17  
1/4 Between Secs. 10 & 11

Original Gov't. survey notes of 1875

Set Post

W. Birch 7" N86°W 61/ks - 3.96'

W. Birch 7" East 51/ks - 3.30'

North

46.00 Enter tam. swamp E+W

75.00 Leave tam. swamp NE+SW

80.00 Sec. Cor.

Sec. Cor. to 2-3-10-11

E-17

Original Gov't survey notes of 1875

Set Post

W. Birch 9" N13°W 12 LKS - 7.92'

Fd. BIRCH STUMP 13" N52W 8.8' <sup>MAYBE ROSE'S BT</sup> WELL ROTTED

W. Birch 12" S40°E 39 LKS - 25.74'

DISTANCE & BEARING FALL IN OLD WOODS ROAD E&W

Spruce 6" N81°E 13 LKS - 8.58'

NO EVIDENCE AT BPG & DIST.

Maple 7" S61°W 40 LKS - 26.40'

DISTANCE & BEARING FALL IN DISTURBED AREA

NOTES BY ED. CHRISTENSON & JOHN J. ROSE, 1927

FOLDER IS PAGE 38

FOUND GOVT. BT'S. TO SEC'S. 3-10+11

FOUND SQUARED POST NOT SCRIBED - THIS POST AGREES

WITH DISTANCE IN GOVT FIELD NOTES, BUT BEARINGS

DON'T AGREE.

SET NEW POST BALSAM 4X4 - Fd. BALSAM POST POINT

874 CCC NOTES BY ROY NELSON 3/14/35

FOUND SCRIBED POST - GOOD CONDITION 30" HIGH

Fd. BIRCH STUMP (ORIG) 12 N46W 13 LKS.

PUT FSLP ON ASH 6 CORNER BEARS <sup>N</sup> S32W <sup>E</sup> 19 LKS FROM TAG

Fd. 14 MAPLE S34 W - 8.5' OLD FSLP LYING ON GROUND

AT BASE OF MAPLE - STRETCH MARKS FROM NAILS VISIBLE

94.6

43

East

C.C. Done

14.00 Enter tom. swamp N+SW

40.00 Set temp. post

54.30 Creek 13.20' runs S.

64.50 Leave swamp NW+SE

79.85 Intersect line 9.90' S. of Cor.

6/28/89 GB-CK

FROM S<sup>1</sup>/<sub>4</sub> 1/6 BET. SEC'S. 7 & 8 RAN LINE AT S41E AND CHAINED

1479.6' - LINE & DISTANCE FELL AT OLD POST POINT FOUND

BELOW GROUND

SET 4X4 X 6 1/2 CEDAR POST IN OLD POST POINT HOLE

MKD NEW TIES TO CEDAR POST

MAPLE 9 S10 W 94.6' MKD S10 BT

MAPLE 8 N25 W 37.5' " S3 BT

MAPLE 11 N47 E 66.9' " S2 BT

OLD WOODS ROAD E&W 15.37' SOUTH OF CORNER

FSLP ON 13 BASSWOOD 30' SOUTH OF CORNER

7/10/90 CK, GB

Set a 2 1/2" x 48" galv. iron pipe with  
brass cap mkd. Brass cap set 1.0' above gnd.

Mkd. New BT, 1

MAPLE 11" S41E at 59.15 MKD S. 11 BT <sup>T149 N R27W</sup> <sup>Double Base</sup> S3/S2

Set 8' steel sign posts 4.0' north

and 4' east from corner with

both signs attached.

Everything recorded in 1989 is the same

S10/S11  
1990  
USF.S

VA Between Secs. 2 &amp; 11

Original Gov't. survey notes of 1875

Set Post

3/7/90 Cedar 12" S80°W 71K5 - 4.62'

Fd. <sup>WINDFALL</sup> CEDAR AT S80W 4.6' SCRIBE 1/4 S VISABLE

10/23/91 Cedar 10" N76°W 281K5 - 18.48'

This is actually the Cedar found on 3/7/90

ITASCA COUNTY ROAD SURVEY 1919 DORALAKE TO PINETOP

NOTES &amp; PLAN ON FILE

FOUND 1 OLD GOVT. BT. CEDAR 12 S80W 71K5 STANDING

AND CEDAR STUMP PARTLY SCRIBED 10" N76W 281K5.

SET NEW TAM. POST &amp; MARKED NEW BT'S.

3/7/90 SPRUCE 5 S60E 35.8'

NO TRACE

TAM. 8 S68W 27.2'

10/23/91 GRAMA, Watzka, Robertson

Cut off Cedar windfall found on 3/7/90. Stood cedar stub up and blaze on cedar says it's the original cedar at N76°W 18.48'. Search for other BT's and found a <sup>(County BT)</sup> Tam stub scribe visible at S65W and a <sup>(County BT)</sup> spruce stump S68E. Using bearings and distance from original cedar 18.48 we determined corner position. Set a 2 1/2" x 48" galv. iron pipe with brass cap marked. Brass cap set 6" above swamp level.

cont. →

North

40.00 1/4 Cor.

6/28/89 GB-CR

CHAINED 2640' AT N89°E FROM SEC. COR., 2-3-10-11

END-UP IN ALDEL, CUT OVER SWFT.

SET 3" FLAT EXW CEDAR POST 5' HIGH

ESLP ON 4 TAM S70E 13.8' FROM POST

AS APPROX. COR. - THIS IS A MESS

3/7/90

CHAINED 2712' AT S3E AND FELL 60' EAST OF 1/4 CORNER

Fd. ORIG. CEDAR BT WITH SCRIBE 1/4 S VISABLE - WINDFALL

MAY HAVE POST UNDER WINDFALL ORIG. CEDAR.

DISTANCE FROM WEST WOULD BE 2654' AND 100' SOUTH

OF ORIG. CEDAR.

ESLP ON 4" DEAD SPRUCE N33E 10' FROM 2" TAM

POST NAILED TO ORIG. CEDAR AS CORNER LOCATION

10/23/91 - Search a large area for old post but found none. List of evidence <sup>found</sup> follows:

1875 Cedar stub (now) 20" N76W 18.5' scribe visible.

1919 TAM stub S65°W 22.3' scribe visible

1919 Spruce Stp. S68°E 35.7' Brass cap mtd.

New Ties: T149N R27W.

8' steel post S68°E @ 35.18' } 1/4 5.2

8' steel post west @ 5.60' } Proper Signs RLS 14677

8' steel post north @ 6.0' } Attached 1991

TAM 4" S77W 34.76' 20d nail &amp; scribed.

1/4 Between Secs. 2+3

Original Gov't. survey notes of 1875

Set Post

Aspen 6" N88°E 26 1/2 - 17.16'

Fd. no evidence

Basswood 12" S86°W 14 1/2 - 9.24'

Fd no evidence

NOTES BY ITASCA COUNTY ROAD SURVEY - DORA LAKE - PINETOP

1919 PLAT AND NOTES ON FILE

FROM FIELD NOTES - (5392' FROM 1/4 BET. SECS. 1+2)

FOUND OLD GOV'T BT'S. BASSWOOD + POPPLE

SET NEW CORNER STAKE

MARKED NEW BT'S.

6/9/84 BIRCH 8 S80W 14.0'

Found rotted birch stp at S86W 14' from oak post

BIRCH 9 N73E 24.2'

Found rotted birch stp. at N87E 24.2' from oak post

NOTES BY ED. CHRISTENSEN + JOHN J. ROSE 1927

FOLDER, 15 PAGE 38

FOUND POST AND BIRCH BT'S. MARKED BY COUNTY SURVEYOR

SET NEW OAK POST 3x3 1/2 WHERE OLD POST STOOD

FOUND BOTH ORIG. BT'S. - NEW POST AGREES WITH GOV'T NOTES

BUT DOES NOT AGREE WITH BEARINGS

DISTANCE SOUTH TO SEC. COR. OF 2-3-10+11 IS 2931.5'

NORTH

C.G. Down

48.00 Enter cam. windfall E+W

72.80 Lake - Set post for M.C.

6/9/89 CK-GB - Chained N88W, 2768' from C 1/4

of sec 2. Found corner at end of our line and at county distance. Found evidence of both county

Birch BT'S. Found <sup>rotted</sup> Oak post point in the ground and top 20" of post <sup>lying on ground.</sup> top is flat on 2 sides.

Placed 60d in rotted post point at corner position.

Mkd NEW BT'S:

Maple 15" S86W 71.5 1/4 S3 BT Double blaze

Maple 15" N25W 42.35 1/4 S3 BT Single blaze

Basswood 12" N53E 35.80 1/4 S2 BT " "

White Birch 12" EAST 24.6' 1/4 S2 BT  
(clump of 3. South Birch)

Corner falls in hardwood on the west side of a hill. Found old fence line N-S.

Fence is just attach to trees. Fence corners approx. 70' north of corner and runs east. Scattered old blazed trees around corner area.

7/10/90 CK, GB

Set a 2 1/2 x 36" galv. iron pipe with brass cap marked. T149N R27W

Brass cap set 6" above grd. <sup>1/4</sup> S3 | S2

8' sign post set north 4.0' east 1990  
4' from corner with survey signs U.S.F.S.

M.C. Between Secs. 2+3

Original Govt. survey notes of 1875

Set Post

Tamarack 6" S64°W 106 1/5 - 69.96'

Tamarack 10" S13°E 210 1/5 - 138.60'

North

5.00 Leave meadow & enter tam. swamp NW 1/4 SE  
40.00 1/4 Cor.

X-13

1/4 Between Secs. 33 + 34

Original Gov't. survey notes of 1875

Set Post

Cedar 8" S52°E 61K5 - 3.96'

Tamarack 12" S65°W 401K5 - 26.40'

North

48.50 Leave swamp NW + SE

80.00 Sec. Cor.

Sec. Cor. to 27-28-33-34

Original Govt. survey notes of 1875

Set Post

Aspen 8" N40°E 61K5 - 3.96'

Aspen 9" S50°E 81K5 - 5.28'

W. Birch 9" S68°W 901K5 - 59.40'

W. Birch 8" N38°W 751K5 - 49.50'

274 By J.M. LARSON 12/5/35

Fd. BIRCH STUB 8 S68W —

Fd. BIRCH STUB 8 N38W —

Fd. FALLEN ASPEN 8 N40E

FSLP ON ELM 10 S88W 391K5. = 25.7'

4/25/90 CK, GB

started chaining from approx.  $\frac{1}{4}$  corner bet. sec 27, 28  
at "T" intersection of logging road south  
down road to 2640'. Found old F.S.L.P. laying  
on the ground at base of a large twin  
elm stump. Position approx, section corner  
position N88E, 25.7 from twin elm. Searched  
for original BT'S. Found a Birch stump  
with a scar facing <sup>approx.</sup> corner position at  
S68W 49.5'. Birch is rotten in center. Fd.  
no other evidence.

East

25.00 Enter tom. swamp NE + SW

38.00 Leave tom. swamp N + S

40.00 Set temp. post

80.16 Intersect line 46.20' S. of Cor.

40.08  $\frac{1}{4}$  Cor.

4/25/90 - Placed a F.S.L.P. on 4" Aspen side at 9'  
from approx. corner position. Our line is 35'  
west and total distance is 2457' to the north.  
Total distance from this position east to "T"  
intersection for approx. section corner 28, 29, 34, 35  
measures 5268'. Gov't dist. was 5290'.  
Placed a F.S.L.P. on 9" Ash  $\pm 600'$  east of  
approx. section corner 27, 28, 33, 34 on south  
side of curve of <sup>Forest</sup> road.

1/4 Between Secs. 27 + 34

V-15

Original gov't. survey notes of 1875

Set Post

Fir 10" N18°E 15 lks - 9.90'

Fir 8" S10°E 20 lks - 13.20'

### NOTES FROM ITASCA COUNTY

ROAD SURVEY - ALYWOOD TO BIG FORK

DISTANCE FROM S 1/4 EAST TO SE COR. - 2637.6

MKD NEW BT.

ASPEN 12 S52E 59.5'

BALSAM 13 N33W 41.0'

NOTES FROM ITASCA COUNTY 1905 IN OLD

LEDGER BOOK PAGE 35 - WE HAVE COPY

ON FILE

SPRUCE 12 S46W 95 lks = 62.70'

BIRCH 10 N5°30' ~~W~~ 40 lks. 26.40'

49

North

10.00 Enter Cedar Swamp SE + W

15.00 Leave Cedar Swamp NE + SW

40.00 1/4 Cor.

FSLP ON 14" POWER POLE NORTH SIDE OF FR 2429  
2640' FROM APPROX. SEC. COR. TO EAST

11-13-85 JA-BT

FROM SE COR. SEC. 27 - EDM. DISTANCE  
WEST ALONG FR 2429 TO STATION 2640  
SEARCH AREA FOR BT'S.

Fd. POSSIBLE COUNTY BT STUMP 14" S54E  
59.5' PLACED 16" NAIL IN OVERGROWTH T  
AT TOP OF STUMP - ALSO FOUND ROTTED STUMP  
AT N25W 41.0' (UNDER POWERLINE)

PLACED FSLP ON POWER POLE N3E 34.5'  
OF APPROX. POSITION IN CENTER OF E+W  
ROAD - DISTANCE FROM APPROX. SE COR.  
SEC. 27 TO APPROX. S 1/4 SEC. 27 - 2637.6'  
NEED TO CHECK IN ROAD LATER - USE  
BACKHOE TO DIG FOR POSSIBLE POST

1/4 Between Secs. 27 & 28

T-13

Original Gov't. survey notes of 1875

Set Post

Aspen 4" S89°W 21 IXS - 13.86'

Aspen 4" S71°E 27 IXS - 17.82'

SEE BOOK 1 Pg. 62  
FOR CORNER HISTORY

50  
North

78.00 Enter tam. swamp NE & SW

80.00 Sec. Cor.

Sec. Cor. to 21-22-27-28

Original Gov't. survey notes of 1875

Set Post

Spruce 5" N53°E 12 IKS - 7.92'

Spruce 7" S40°E 30 IKS - 19.80'

Spruce 5" S69°W 5 IKS - 3.30'

Cedar 8" N12°W 15 IKS - 9.90'

874 CCC NOTES BY ROY NELSON 2-8-35

Fd. POST - IN GOOD CONDITION - NOT SCRIBED

Fd. CEDAR SNAG N37W 5 IKS. = 3.3 SCRIBED

East

2.00 Leave swamp NE + SW

40.00 Set temp. post

74.50 Enter tam. swamp N + S

80.12 Intersect line 22.44' N. of Cor.

1/8/74 CK

PUT FSLP ON 12 CEDAR AS APPROX. SEC. COR.

CHAINED FROM APPROX. 1/4 BET. SECS. 22-27


4/24/90 GB-CK

Fd. TAG ON CEDAR FROM 1974 - SEARCHED AREA TO NE

OF TAG AS ORIG. TIES WEST 26.4' - SOUTH 132' + EAST

132' WOULD CHECK FAIRLY CLOSE AT THIS POSITION

NO EVIDENCE FOUND TODAY - MORE SEARCH ON WED.

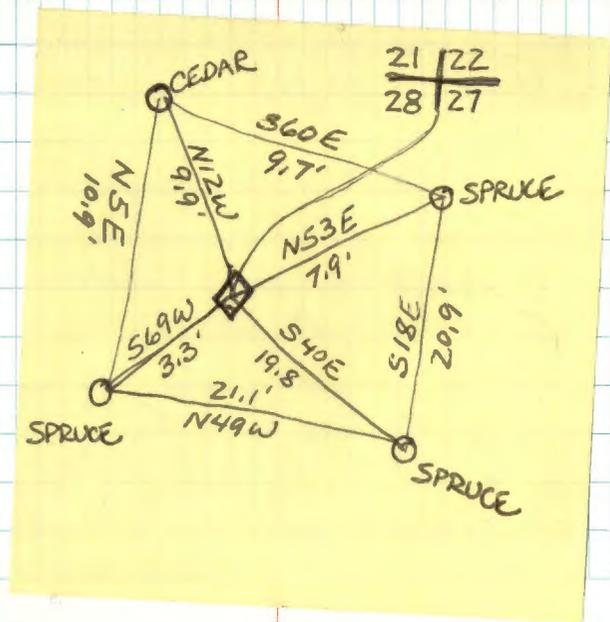

1/4 Between Secs. 22 & 27

Original Govt. survey notes of 1875

Set Post

JACK  
Pine 10" S56°W 71K5 - 4.62'

JACK  
Pine 9" N18°W 61K5 - 3.96'

5/24/90

SET 2" X 48" IRON PIPE WITH BRASS CAP MARKED

14" ABOVE GROUND

T149N R27W

1/4  $\frac{522}{527}$

1990

USFS

8' STEEL SIGN POST SET DUE NORTH 4.55'

" " " " " EAST 5.35'

" " " " " S56W AT ORIG. STUMP 4.75'

North

12.00 Leave swamp NE & SW

15.00 Enter tam. swamp NE & SW

38.00 Leave tam. swamp E & W

40.00 1/4 Cor.

1/7/74 CK WINTER

START LINE WEST FROM SEC. COR. 22-23-26-27

RAN LINE AT DUE WEST AT 2525' W CROSS WOODS

TRAIL - CHAINED 2690' W SEARCH AREA NO EVIDENCE

OF B.T.S. WAS FOUND - PUT FSLP ON 6" J. PINE AS

APPROX 1/4 COR. - Fd. 20" N. PINE WITH OLD BLAZES

E & W AT 2610' W NEAR OUR LINE - CONT. LINE

WEST AT 1000' W ENT. TAM. SWP. NE & SW

PUT FSLP ON 26" N. PINE 120' E OF APPROX 1/4

LOCATION TRAIL BCS HAS

4/24/90 GB-CK

26" N. PINE ABOVE NOW IS STUMP ON EAST SIDE OF WOODS

ROAD. - NAIL TAG TO FACE OF STUMP - TAG FOUND ON GROUND

Fd. DOWN J. PINE - WELL ROTTED - WITH SCRIBE 1/4 S

ON SMALL FLAT BLAZE - GROUND FROZEN NOW CANT

SCRAPE AREA OF POST - ALSO NOT SURE WAGH BT WE

HAVE - SHOULD BRING KEN WHITEHORN IN AT SOME TIME

SOON AS THEY COULD BURN AREA VERY SOON - CORNER

IN HEAVY STORM DAMAGE AND NOW EVERYTHING IS

LAYED FLAT FOR 1/4 MILE AROUND COR.

BRING IN SIGN POSTS TO WITNESS CORNER - NO TREES

SHOULD PLACE 4X4 AT ROAD

1/4 Between Secs. 21 & 22

Original Govt. survey notes of 1875

Set Post.

Aspen 5" S52°W 34 1/2 - 22.44'

Aspen 5" S55°E 20 1/2 - 13.20'

North

68.00 Enter tam. Swamp NW & SE

80.00 Sec. Cor.

Sec. Cor. to 15-16-21-22

N-13

Original Govt. Survey notes of 1875

Set Post

Spruce 6" S72°W 10 1/2 - 6.60'

Spruce 7" N68°W 23 1/2 - 15.18'

Spruce 5" N42°E 52 1/2 - 34.32'

Tamarack 6" S30°E 20 1/2 - 13.20'

54

East


7.00 Leave swamp NE & SW

40.00 Set temp. post

40.30 Enter cedar swamp NW & SE

47.00 Leave swamp NW & SE

80.60 Intersect line 6.60' N of Col.

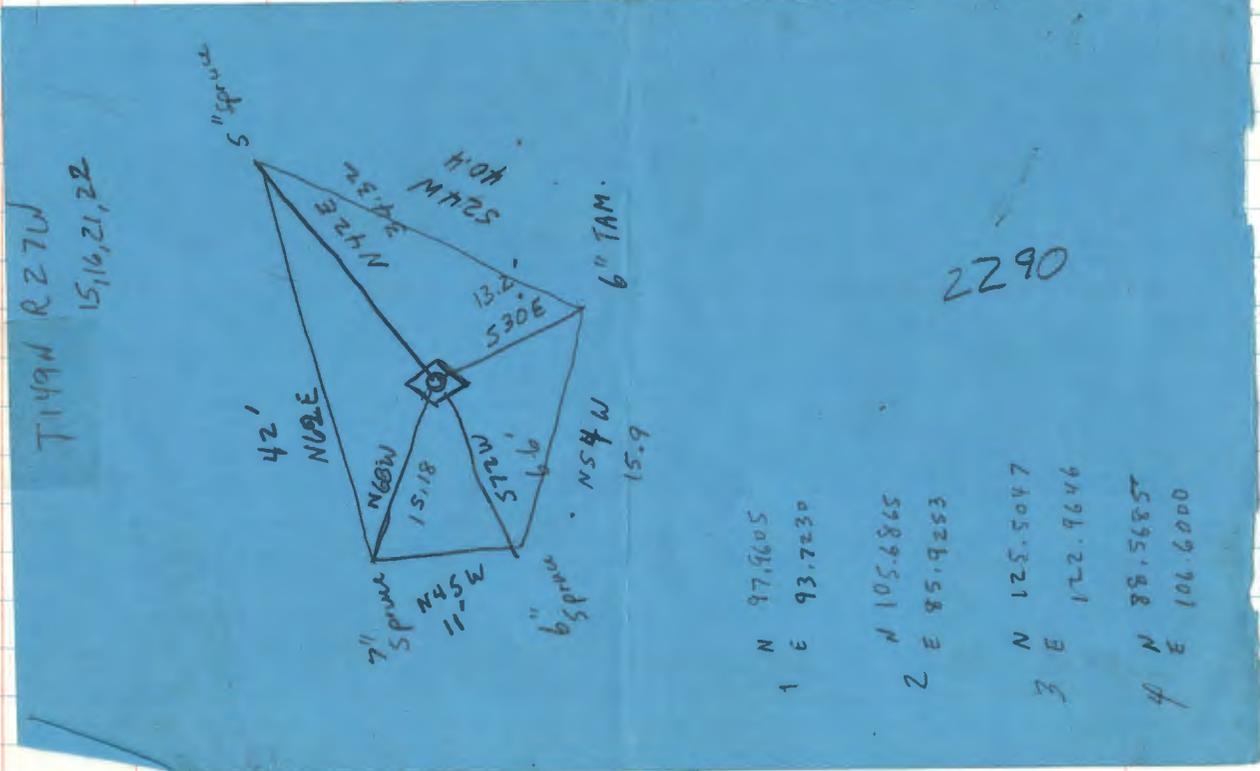

1/4 Between Secs. 15 + 22

Original Gov't. Survey notes of 1875

Set Post

Cedar 20" N55°E 6 1/2" - 3.96'

Cedar 8" S29°E 23 1/2" - 15.18'

CERTIFICATE FILED

North

11.50 Leave swamp E + W

15.00 Enter tam. swamp NW + SE

30.50 Leave tam. swamp E + W

40.00 1/4 Cor.

1/4 Between Secs. 15+16

L-13

Original Govt. survey notes of 1875

Set Post

Tamarack 6" S51°W 51Ks - 3.30'

Tamarack 8" N35°E 221Ks - 14.52'

North

43.00 Enter open marsh E+W

48.30 Creek 99.00' runs E., enter Tam.

Swamp E+W

80.00 Sec. Cor.

Sec. Cor. to 9-10-15-16

Original Govt. Survey notes of 1875

Set Post

Tamarack 10" N 8° W 16 lks - 10.56'

Aspen 6" N 64° E 20 lks - 13.20'

Aspen 6" S 1° E 24 lks - 15.84'

Spruce 8" S 58° W 34 lks - 22.44'

874 CCC NOTES BY ROY NELSON 2-28-35

Fd. POST IN GOOD CONDITION - 30" HIGH - SCRIBED

NO B.T.S. SEEN

LOCATION POSTER ON FENCE POST ON SOUTH SIDE

OF CORNER - CORNER BEARS SOUTH 17 LKS. = 11.22'

874 CCC NOTES BY F.B. AMES 1-4-34

Fd. W.C. POST - (GOOD CONDITION 5" DIA.)

LOCATION POSTER ON FENCE POST 5" NORTH

SIDE OF E+W LINE - CORNER BEARS NORTH

25 LKS. 16.5'

W.C. 50 LKS. NORTH OF CORNER

East

Cl. Date 11/15/89

10.50 Leave Tam. swamp

33.00 Enter Tam. swamp N + S

42.00 Pond

47.00 Leave Tam. swamp N + S

56.00 Enter Tam. swamp N + S

79.00 Leave Tam. swamp N + S

6/26/89 GB-CK

Fd. OLD TAG ON DOWN 7" CEDAR POST DATED 7/16/46 JR

ANOTHER 6" CEDAR POST STANDING WITH TAG 11/7/63 KAISER

EST APPROX. SEC. COR. IN CENTER OF OLD E+W TSP. ROAD

OLD POST + TAG NORTH 33.0' + "63" POST IS 24.6 FROM P. OF E+W ED.

PLACE NEW TAG ON POWER POLE DUE SOUTH 58.7'

PLACE 50<sup>d</sup> SPK IN CENTER LINE OF E+W ROAD AS APPROX. CORNER.

1/4 Between Secs. 10-15 (WC)

J-15

Original Govt. survey notes of 1875

Set Post

Tamarack 6" N. 28° E 30 lks - 19.80'

Tamarack 7" S 20° W 6 lks - 3.96'

3-29-90 GB-CK

CHAINED FROM COUNTY MONUMENT AT SE COR. SEC. 10

LINE RUN AT TRUE WEST - 1320' W IN CENTER OF  
N+S COUNTY ROAD #126 - CONTINUE WEST TO STA.

2514' WHICH IS ORIG. DISTANCE TO WC 1/4 COR.

SEARCH FOR ORIGINAL EVIDENCE, BUT NONE COULD  
BE FOUND AT THIS TIME - PLACE RIBBON ON

7" TAM. - 23' EAST OF OUR DISTANCE 2514' W

CONTINUE WEST ACROSS POND THROUGH VERY  
HEAVY WINDFALLS FROM WIND STORM YEAR AGO  
TO STATION 5390' W - THEN GO NORTH 82' TO  
APPROX. SEC. COR SW COR. SEC. 10

ORIGINAL DISTANCE FOR MILE WAS 5293'

NOW WALK BACK TO WC 1/4 AND ESTABLISH  
APPROX. WC 1/4 AND PLACE FSLP ON 7" TAM.

23' EAST OF APPROX. LOCATION - SHOULD SEARCH  
IN SPRING OR SUMMER - B.T.S. COULD BE

UNDER MOSS + GRASS - OUR DISTANCE WAS  
AT EDGE OF BDG + POND ICE - LINE WAS VERY  
DIFFICULT TO RUN BECAUSE OF WINDFALLS - BUT  
DISTANCE SHOULD BE OK

CC DONE CK

58

North

40.00 1/4 Cor.

ORIG. TIES FOR RANDOM LINE BET. SEC'S. 10-15

10.50 LV TAM. SWP.

33.00 ENT TAM. SWP. N+S

36.70 WEST EDGE OF POND N+S

CHAINED ON ICE  
42.00 EAST EDGE OF POND

47.00 LV TAM. SWP. N+S

56.00 ENT. TAM. SWP. N+S

79.00 LV TAM. SWP. N+S

80.20 INTERSET, LINE 70 LKS. So OF COR.

WEST TRUE LINE 589° 30' W

38.10 WC FOR 1/4 COR. SET TAM. POST 4 x 4 1/2

TAM 6 N 28 E 30 LKS. = 19.8 - TAM 7 S 20 W 6 LKS. = 4.0'

4-10-90 GB-CK

FROM 7" TAM. WE MEASURE 40' NORTH FOR  
APPROX. CORNER - TAG IS SOUTH 40' FROM  
CORNER. (WC)

1/4 Between Secs. 9-10

Original Gov't. survey notes of 1875

Set Post

Fix 6" S80°E 61 1/2s - 40.26'

W. Birch 8" N62°E 48 1/2s - 31.68'

North

80.00 Sec. Cor.

Sec. Cor. to 3-4-9-10

Original Gov't. survey notes of 1875

Set Post

W. Birch 6" N21°E 64 IXS - 42.24'

W. Birch 10" N34°W 80 IXS - 52.80'

W. Birch 10" S13°E 16 IXS - 10.56'

W. Birch 9" S4°W 28 IXS - 18.48'

See Book #1 page #59

NOTES OF JOHN J. ROSE RLS 1927

CORNER ESTABLISHED BY DOUBLE PROPORTIONAL

MEASUREMENT - NO ORIG. EVIDENCE WAS FOUND

FOLDER #15 PAGE 53

SET ASH POST 4" X 4" Fd. POST POINT AND PIECES  
OF SQD TOP OF POST WITH FAINT SCRIBE VISIBLE

MAPLE 5 N64E 20.5'

Fd. DECAYED MAPLE STP. IN PLANTATION N76E-20.5'

ASPEN 14 NS0W 3.6'

Fd. LARGE DECAYED ASPEN STP.  $\frac{3}{4}$  LOG AT N42W 3.6'

MAPLE 5 S18W 7.0'

Fd. DECAYED MAPLE STP. (BAD SHAPE) S30W 7.0'

MAPLE 8 S8E 23.4'

Fd. DECAYED MAPLE STP. AT S1W 23.7'

East

21.00 Enter spruce swamp NE &amp; SW

29.00 Leave spruce swamp NE &amp; SW

40.00 Set temp.  $\frac{1}{4}$  cor.

80.60 Intersect line 52.80' S. of Cor.

BT'S BY LAUSCHE 1958 AS FOLLOWS

MAPLE 11 S55W 25.0' SCRIBE VISIBLE

MAPLE 8 S36E 39.4' OVERGROWN

IRONWOOD 10 N55W 19.75' OVERGROWN

MAPLE STP. 8 N60E 42.9' IN PLANTATION

SET 3" SQD. ASH POST AT CORNER AND PLACE FSLP

ON MAPLE 12 N86E 9.5' - PLACE MAG. PELLET

UNDER POINT OF ASH POST - REPLACE ASH POST FOUND.

DISTANCE  $\frac{3}{4}$  BRG FROM  $\frac{1}{4}$  COR, CHECKED VERY GOODCHAIN N2E 1320'  $\frac{1}{2}$  WAGNER LAKE RD E-W - CONT.

TO 1350' STOP FOR THIS DAY 5-26-83 CK-JA-GB

CONT. LINE 5-31-83 N2E 2605' TO  $\frac{1}{4}$  COR. - Fd. $\frac{1}{4}$  BET. 3-4 - LATER PUT FSLP ON 3" IRONWOOD

ON N SIDE OF WAGNER LAKE ROAD E-W - SEC. COR.

SZW IS 1350' AND  $\frac{1}{4}$  COR TO N2E IS 1256'

11-28-12 R MAIN

GPS COMONUMENT SURVEY GRAD GPS

1/4 Between Secs. 3-10

Original Gov't. Survey notes of 1825

Set Post

W. Birch 6" N21°W 30 LKS - 19.80'

W. Birch 10" S30°E 10 LKS - 6.60'

NOTES BY JOHN J. ROSE RLS 1927

SET BY PROPORTIONAL MEASUREMENT

2623.1' E-W-LINE RUNS AT N86W

FOLDER #13 Pg. 118

SET MAPLE POST - NO POST FOUND - BUT

FOUND HOLE IN GROUND FROM BOTH BT'S.

W. OAK 12 N82E 18.6'

FD. 17" W. OAK AT EAST 18.6' <sup>REScribed BT</sup> SCAR FACING COR.

FIR 3 NORTH 16.2'

FD. 7" BALSAM STP. WELL ROTTED AT N9E 16.2'

SET 3" FISH POST AT CORNER LOCATION 4' HIGH

MOUND 8 ROCK AROUND FISH POST AND MKD. 3 NEW

BT'S. BALM-GILEAD 6 N11W 34.75' MKD 1/4 S3 BT

MAPLE 5 S8E 80.95' MKD 1/4 S10 BT

BALM-GILEAD 7 N83W 16.50' MKD 1/4 S3 BT

460' N86W TO 1/2 OF WAGNER LAKE ROAD BRS NW-SE

PUT FSLP ON 12" MAPLE 1/4 COR. BRS. S86E 493'

TAG IS ON 12" MAPLE ON WEST SIDE OF ROAD

AREA 80' E OF COR. HAS BEEN RECENTLY LOGGED N-S.

5-20-83 CK-6B-JA

North

40.00 Set temp 1/4 cor.

48.00 Enter tan. swamp NE &amp; SW

76.60 Intersect line 42.90' E. of cor. in

Swamp

CHAINED AT N86W 2623' TO SEC. COR TO WEST  
WHICH WAS ALSO RECOVERED - DISTANCE CHECKED OK

874 CCC NOTES BY ROY NELSON 3-14-35

FD. POST (SCRIBED) 28" HIGH - GOOD CONDITION

FD. OAK 10 EAST 28 LKS. = 18.48' SCRIBED 1/4 S3 BT

FD. BALSAM 3 NORTH 24 LKS. = 15.84' SCRIBED 1/4 S10 BT

PLACED FSLP ON OAK BT

874 BY JOE LAUSCHE DATED 4-8-58

FD. BALSAM STUMP 7" N1E 15.8'

FD. OAK 14 N84E 18.5'

MARKED NEW BT'S IN 1958

MAPLE 6 S21W 63.0' MKD. S10 BT

BALSAM 8 N45E 52.0' " S3 BT

BLAZED LINE WEST TO FR 2229

1/4 Between Secs. 3-4

Original Gov't. Survey notes of 1875

Set Post

Basswood 7" N24°W 106 1/2 - 69.96'

Basswood 8" S30°E 30 1/2 - 19.80'

NOTES BY JOHN J. ROSE RLS 1927

SET BY PROPORTIONAL MEASUREMENT

FOLDER #13

SET SPRUCE POST Fd, 5" SQD. SPRUCE POST

30" LONG FLAT SIDES WITH FAINT SCRIBE

SPRUCE 5 S63E 4.0'

Fd. ROTTED SPRUCE STP. S52E 4.0'

SPRUCE 4 N30W 11.3'

Fd. SPRUCE WINDFALL SCRIBE S4 BT VISIBLE

AT NZZW 11.3'

SET 3" SQD. DRY TAM POST AT SOUTH EDGE  
OF SPRUCE POST AND MKD 3 NEW BT'S.

TAM. 9 N41E 41.0' MKD. 1/4 S3 BT

BLK. SPR. 6 S79E 16.3 MKD. 1/4 S3 BT

TAM. 7 S2W 54.1 MKD. 1/4 S4 BT

CORNER IS IN SPRUCE TAM SWP. APPROX. 100' W

TO HIGHGROUND AND 50' N TO HIGHGROUND

545' SOUTH OF COR LV, SWP.

West

23.75 Enter meadow NKS

28.75 Set Post for M.C.

CHAINED AT NZE 2609' FROM SEC. COR.

FELL 14' W OF POST - PUT ESLP ON

3" IRONWOOD ON NORTH SIDE OF WAGNER LAKE

ROAD 1256' NZE TO 1/4 COR.

5-31-83 CK-JA-GB

M.C. Between Secs. 28-33

Original Gov't. Survey notes of 1875

Set Post

Aspen 7" N64°E 640 1/2 - 422.40'

West

48.00 Set Post for M.C.

M.C. Between Secs. 28-33

Original Gov't. Survey notes of 1875

Set Post

Aspen 10" N85°W 270 lxs - 178.20'

Aspen 8" S86°W 266 lxs - 175.56'

West

70.00 Enter tam. + spruce swamp N+S

80.00 Sec. Cor.

Sec. Cor. to Secs. 28-29-32-33

Original Gov't. Survey Notes of 1875

Set Post

Tamarack 10" N42°W 30 lks - 19.80'

Spruce 6" S37°W 35 lks - 23.10'

Fir 6" N45°E 25 lks - 16.50'

Spruce 6" S58°E 16 lks - 10.56'

874 CCC NOTES By J.M. LARSON 12-31-35

ASPEN POST (REPLACED) 36" HIGH

Fd. 6" TAM. WINDFALL N42W 30'

LOCATION POSTER ON BALSAM 4 FACING CORNER

CORNER BEARS S57E 16 LKS.

CORNER WAS ESTABLISHED FROM ORIG. FIELD NOTES

South

From Col. in swamp

5.00 Leave swamp NW & SE

10.00 Enter meadow NE & SW

14.00 M.C.

M.C. Between Secs. 32-33

Original Govt. survey notes of 1875

Set Post

Aspen 8" N3°E 450 1/2 - 297.00'

Aspen 6" N5°W 468 1/2 - 308.88'

North

10.00 Leave swamp E+W

32.50 Enter tam. swamp NW+SE

40.00 1/4 Cor.

1/4 Between Secs. 28-29

J-9.

Original Gov't survey notes of 1875

Set Post

Tamarack 4" N1°W 11.80.145 - 7.79'

Tamarack 5" N2°E 12.20.145 - 8.05'

North

52.00 Leave swamp NE + SW

69.00 Enter tam. swamp NE + SW

80.00 Sec. Cor.

Sec. Cor. to Secs. 20-21-28-29

Original Gov't. Survey notes of 1875

Set Post

Tamarack 6" S69°W 61K5 - 3.96'

Tamarack 10" S2°E 71K5 - 4.62'

Tamarack 8" N74°W 31K5 - 1.98'

Tamarack 10" N59°E 181K5 - 11.88'

East

22.50 Leave swamp NE &amp; SW

40.00 Set temp. 1/4 cor.

55.50 Creek bottom N &amp; S

~~58.50~~  
66.50 Creek runs 66' N.

66.50 Enter cedar swamp N &amp; S

73.50 Leave cedar swamp N &amp; S

76.00 Enter swamp NE &amp; SW

80.08 Intersect line at cor.

1/4 Between Secs. 21-28

Original Gov't. survey notes of 1875

Set Post

N. Pine 20" S10°E 5 1/4s - 3.30'

N. Pine 20" N71°E 32 1/4s - 2.12'

North

35.50 Leave swamp E + W

40.00 1/4 cor.

1/4 Between Secs. 20-21

Original Gov't. survey notes of 1875

Set Post

W. Birch 7" N37°E 46 IXS - 30.36'

Tamarack 7" S78°W 22 IXS - 14.52'

North

74.00 Enter tam. swamp NE + SW

80.00 Sec. Cor.

Sec. Cor. to Secs. 16-17-20-21

Original Gov't. survey notes of 1875

Set Post

Spruce 8" N34°W 49 1/2s - 32.34'

Spruce 7" S23°W 38 1/2s - 25.08'

Spruce 8" N71°E 26 1/2s 17.16'

W. Birch 8" S19°E 28 1/2s 18.48'

See book 1, page 9

East

20.00 Enter tam. + spruce swamp N + S

40.00 Set temp 1/4 in swamp

68.00 Leave swamp NE + S

74.20 Creek 86' runs N.

80.80 Intersect line 39.60' N. of Cor.

1/4 Between Secs. 16-21

Original Gov't. Survey notes of 1875

Set Post

Spruce 8" S28°W 10 1/2s - 6.60'

Spruce 7" N60°E 13 1/2s - 8.58'

North

40.00 1/4 Cor.

1/4 Between Secs. 16-17

Original Govt. survey notes of 1875

Set ~~Post~~ MKD 4" SPRUCE TREE

Tamarack 12" N20°W, 71KS - 4.62'

Spruce 9" S85°E 161KS - 10.56'

North

80.00 Sec. Cor.

Sec. Cor. to Secs. 8-9-16-17

J-9

Original Gov't survey notes of 1875

Set Post

Spruce 7" S13°E 25 IKS - 16.50'

Spruce 6" N24°E 11 IKS - 7.26'

Spruce 7" S51°W 48 IKS - 31.68'

Tamarack 7" S51°W 48 IKS - 31.68'

SEE BOOK #1 PAGE 77

74

East

3.50 Leave swamp N & S

38.00 Enter tom. swamp N & SW

40.00 Set temp. 1/4 cor.

49.00 Creek 9.90' runs S.

53.50 Leave swamp N & S

80.90 Intersect line 46.20' N. of cor.

24  
1/4 Between Secs. 9-16

J-11

Original Gov't. survey notes of 1875

Set Post

Tamarack 7" S29°W 34 1/2 - 22.44'

Tamarack 8" N54°E 25 1/2 - 16.50'

25

North

16.00 Leave swamp E+W

40.00 Set 1/4 cor. post

G-9

1/4 Between Secs. 8-9

Original Gov't. survey notes of 1875

Set Post

Aspen 6" N45°E 25 lks - 16.50'

Tamalack 10" N2°W 60 lks - 39.60'

NOTES FROM ITASCA COUNTY 1905 IN OLD  
LEDGER BOOK PAGE 37 - WE HAVE COPY

TAM. 9 N85E 68 lks = 44.88'

TAM. 8 N80W 65 lks = 42.90'

North

40.50 Enter tam. swamp E+W

80.00 Sec. Cor.

Sec. Cor. to Secs. 4-5-8-9

E-9

Original Gov't. survey notes of 1825

Set Post

Tamarack 4" N21°W 22 lks - 14.52'

Tamarack 6" N60°E 38 lks - 25.08'

Tamarack 8" S44°W 20 lks - 13.20'

Tamarack 7" S 88°E 70 lks 16.20'

NOTES BY JOHN J. ROSE 1927 FOLDER 15 PAGE 51+52

SET PROPORTIONATE

SET NEW SPRUCE POST 5"

BIRCH — N60E 9.7'

BALSAM — N37W 21.6'

BALSAM — S76°30'E 30.6'

BALSAM — S23°15'W 24.2'

6/15/89 CK-GB Chained SW from  $\frac{1}{4}$  corner bet 4/5

2614. Our line fell 28' east of corner and  
at 2619 to corner. (Rough chaining) Found

LLC F.S. <sup>(west)</sup> L.P. on a post laying on the ground

Found well rotted post point in the ground.

Found well rotted Birch stp. N56E at 9.0'

Found well rotted Balsam S24W at 24.2'

Found F.S.L.P. from 1945 <sup>Stajkal & Karls</sup> S80E 9.3' from corner.  
June 9th <sup>Balsam</sup>

East

C.C. Done

77

40.00 Set. temp. 1/9 cor.

41.00 Creek 3.96' runs SE

46.00 Leave swamp N & S

79.40 Intersect line 6.60' N. of cor.

6/15/89 CK-GB

MKO. Temporary BT's:

Spruce 9" N46W 35.6' Tag & spike

Burnt pine stp. N68E 22.9' Spike & scribed BT

Spruce 5" S67E 23.9' Tag & spike

Placed 3"x3"x5" Balsam post at corner position.

Corner falls on high ground alongside the north edge  
of a Bk. spruce swamp.

874 CCC NOTES BY F.B. AMES 1-15-34

Fd. POST SCRIBED IN GOOD CONDITION

Fd. BIRCH 8 N59E 15 lks. = 9.90' SCRIBED S4 BT

Fd. BALSAM 6 N34W 32 lks. = 21.12' " 55 BT

PLACED LOCATION TAG ON POST AT CORNER.

CORNER POST IN SPRUCE + TAM. SWAMP - SMALL HILL

TO NORTH ABOUT (2 CHAINS) = 132'

874 H. ADAMS 8-27-34

Fd. SPRUCE POST SCRIBED 32" HIGH - GOOD CONDITION

Fd. BALSAM 5 N45W 25 lks. = 16.5'

1/4 Between Secs. 4-9

Original Gov't. survey notes of 1825

Set Post

Cedar 6" S81°W 281ks - 18.48'

Cedar 10" N80°E 341ks - 22.44'

NOTES By JOHN ROSE 10-21-27

FOUNDER 15 - Pg. 51

DISTANCE OF SOUTH LINE OF SEC. 4 = 5174.6

RANDOM LINE FELL 9.5' SOUTH OF POST

NOTES STATES NO TRACE OF 1/4 COR POST  
OR B.T.S. (MIDDLE OF PAGE)

874-CCC NOTES By F.B. AMES 1-18-34

Fd. SCRIBED POST - GOOD CONDITION - 36" HIGH

Fd. ASH 8 S23W 171ks. = 11.22' - MKD 1/4 S9 BT

Fd. BALSAM 6 N62W 231ks. = 15.18' MKD 1/4 S4 BT

PLACED FSLP ON CEDAR POST 6" ON NORTH  
SIDE OF R.R. GRADE - FROM TAG DUE SOUTH

1.25 CHS. = 82.5'

North

40.00 Set temp 1/4 cor

78.90 Intersect line 46.20 W. of cor.

34  
1/4 Between Secs. 4-5

Original Gov't. survey notes of 1875

Set Post

Tamarack 8" N10°E 8 LKS - 5.28'

Tamarack 7" S57°W 24 LKS - 15.84'

NOTES BY JOHN J. ROSE 1927

FOLDER 15 PAGE 52 (2541' NORTH)

PROPORTIONATE DISTANCE (2613.16' SOUTH)

SET OAK POST 4"

SPRUCE 7 S56E 8.3

SPRUCE 4 N67W 13.2

6/15/89 CK-GB

Chained south 2541' from NW sec. cor. of 4.

Found corner 68' west of our line and 3' south of our 2541'. Found point of Oak post set in place from Rose's spruce BT'S. Found rotted spruce stp. at S53E 8.3' with scribe "BT".

Found rotted spruce stp wind fall at N64W 13.2'

SET NEW PINE POST 4x4x5' at true corner position. <sup>new</sup> Post set 2' down in swamp. Oak post set on north side.

Mkd. New BT'S:

Blk. Spruce 7" S7W 42.4 Spike & Tag.

Blk. Spruce 6" N67W 37.05 " "

Birch 7" S84E 26.4' " "

C-9

North

79  
C.E. Dore

36.00 Enter Tam. Swamp NE+SW

39.50 Leave Swamp E+W

40.00 1/4 Cor.

6/15/89 Checked Rose's "leave swamp" call 414' west of corner. Call seems to check within 10'. Placed 50d spikes at Rose's BT'S and at corner. Corner falls about 100' east of high ground and about 200' south from high ground.

TO REACH 1/4 COR. DRIVE SE ON FR 2431-A ACROSS DIKE TO BARROW PIT AREA THEN GO DUE EAST APPROX. 400' TO COR.

NOTES FROM ITASCA COUNTY 1905 - IN OLD LEDGER BOOK PAGE 38 - WE HAVE COPY

TAM. 17 N64E 44 LKS. = 29.04'

SPRUCE 10 N62W 74 LKS. = 48.84'