

T150N R28W Corners Book 2

T150N - R28W

CORNER

RESTORATION

FIELD BOOK

82.0012


BOOK 2

LINKS IN FEET, 10THS AND 100THS OF FEET

Links	Feet	Links	Feet	Links	Feet	Links	Feet	Links	Feet	Links	Feet
1	0.66	18	11.88	35	23.10	52	34.32	69	45.54	86	56.76
2	1.32	19	12.54	36	23.76	53	34.98	70	46.20	87	57.42
3	1.98	20	13.20	37	24.42	54	35.64	71	46.86	88	58.08
4	2.64	21	13.86	38	25.08	55	36.30	72	47.52	89	58.74
5	3.30	22	14.52	39	25.74	56	36.96	73	48.18	90	59.40
6	3.96	23	15.18	40	26.40	57	37.62	74	48.84	91	60.06
7	4.62	24	15.84	41	27.06	58	38.28	75	49.50	92	60.72
8	5.28	25	16.50	42	27.72	59	38.94	76	50.16	93	61.38
9	5.94	26	17.16	43	28.38	60	39.60	77	50.82	94	62.04
10	6.60	27	17.82	44	29.04	61	40.26	78	51.48	95	62.70
11	7.26	28	18.48	45	29.70	62	40.92	79	52.14	96	63.36
12	7.92	29	19.14	46	30.36	63	41.58	80	52.80	97	64.02
13	8.58	30	19.80	47	31.02	64	42.24	81	53.46	98	64.68
14	9.24	31	20.46	48	31.68	65	42.90	82	54.12	99	65.34
15	9.90	32	21.12	49	32.34	66	43.56	83	54.78	100	66.00
16	10.56	33	21.78	50	33.00	67	44.22	84	55.44	101	66.66
17	11.22	34	22.44	51	33.66	68	44.88	85	56.10	102	67.32

T150N R28W

BOOK #2 OF 2

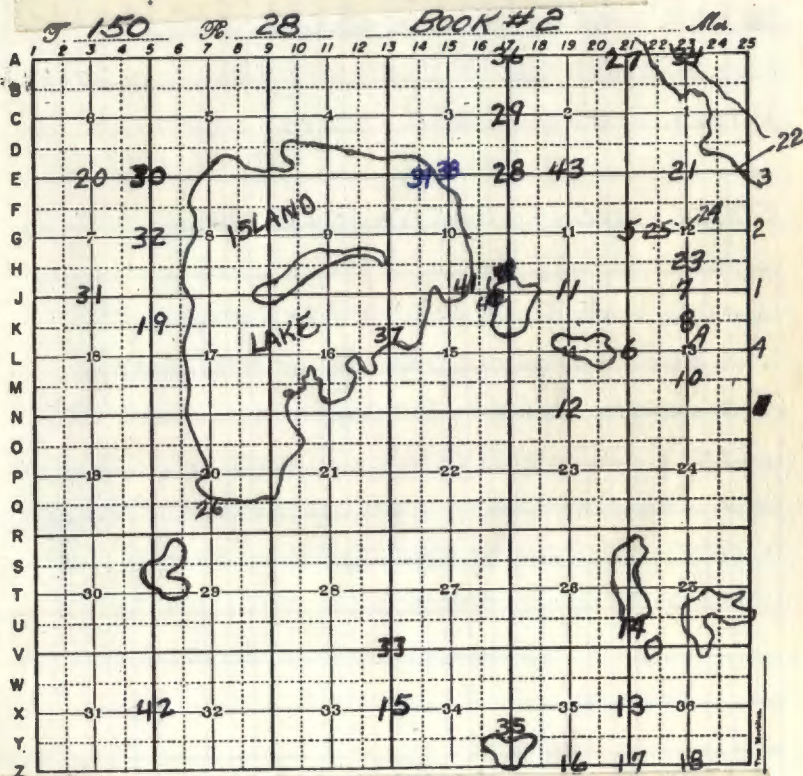

EAST BOUNDARY

SECTION CORNER TO SECTIONS 7, 12, 13 + 18

NOTES OF ORIG. GOVT. SURVEY 1891

SET WOOD POST

SPRUCE 5 N63E 28 LKS.

Fd. SPRUCE ~~STANDING~~ ^{STANDING} AT BRG + DIST. 1925

BALSAM 10 S70E 40 LKS.

SPRUCE 15 S65W 20 LKS.

BIRCH 5 N35W 34 LKS.

Fd. BIRCH STANDING AT BRG. + DIST. 1925

NOTES BY JOHN J. ROSE (RLS) 11-30-25

FOLDER #5 PAGE 120

Fd. PART OF OLD POST

SET NEW CEDAR POST 4" X 4"

Fd. POST BURNED + ROTTED LYING ON GROUND

10-29-82

10-27-82 OK-GB-JA

CHAINED S82E -1282' ROSE'S. DISTANCE AND

FOUND OLD STAKE ROTTED + BURNED LYING ON

GROUND - ALSO CHAINED NORTH FROM 1/4 13+18

WHICH WAS REESTABLISHED FROM OLD FSLP BY

C.C.'S. DISTANCE NORTH FROM 1/4 13+18 IS 2653'

BOTH DISTANCES CHECKED OK WITH ROSE'S

ALSO FOUND BIRCH CLUMP (4) WITH OLD STUMP IN

CENTER WHICH CHECKS FOR BEARING + DISTANCE

BY ROSE BIRCH STP. N35W-22.4' ORIG. BT

SET 3" SQD. X 5' ASH POST AT COR. AND PLACE

3 LARGE ROCK AROUND BASE OF POST

PUT FSLP 8" BALMIE N4E 2610'

CHECKED ROSE'S LAND TIES

265' E ENT. SWP. NN-SE OK ENT. BEAVER POND ⁸² NW270' N ENT. SWP. NW-SE OK " " " ⁸² NW

787' S DRY RUN W + NE OK

QUARTER CORNER BET. SEC'S. 7+12

NOTES OF ORIG. GOV'T. SURVEY 1891

SET WOOD POST

ASPEN 5 N70E 5 LKS.

ASPEN 4 S70W 8 LKS.

NOTES BY JOHN J. ROSE DEC. 11, 1925

FOLDER #5 Pg. 111

RAN RANDOM LINE NORTH BET. SEC'S. 7+12

NO TIE TO 1/4 COR - RAN TO MC BET. SEC'S. 7+12

S163.1 TO MC - SEE PAGE 3 THIS BOOK

FOLDER #5 Pg. 114

ROSE RAN LINE EAST FROM 1/4 COR. BET. SEC'S. 11+12

3926' THROUGH SECTION 12 AND CROSS RANGE LINE 1.4'

SOUTH OF 1/4 COR. BET. SEC'S. 12+7

FOLDER 13 Pg. 94 VERY BOTTOM IS CORRECTED LINE

FROM 1/4 BET. SEC'S. 7+8 RAN LINE WEST THROUGH SEC. 7

S110' CROSS RANGE LINE 2.8' SOUTH OF 1/4 COR. BET. 7+12

NOTE: ROSE ~~WAS~~ DIDN'T RECORD WHAT HE FOUND OR

SET AT CORNER POSITION

ENTERED IN FIELD BOOK 8/93 CK

12/6/83 CK-JA

CHAINED NORTH FROM EVIDENCE FOUND AT SE COR.

OF SEC. 7 (TIES ON CORNER CARD) 2643' - SET

2" ASH PICKET AT END OF CHAINING - USED ROSE'S

TIES TO LOCATE BETTER SEARCH AREA - NO EVIDENCE

FOUND AT THIS TIME.

12-14-83 CK-GB-JA

FD. PAST & BT EVIDENCE AT Q1/4 SEC. 12 BY ROSE

RAN LINE SBBE AND CHAINED ROSE'S. DISTANCE

OF 1308' AND AT DISTANCE CHAIN UP FROM SOUTH

ESTABLISH APPROX. 1/4 SEC'S. 7+12

AT INTERSECTION OF CHAINED DISTANCES - SET

4"X4"X6' CEDAR POST AS APPROX 1/4 COR.

33' WEST OF MOOSE LAKE ROAD NW-SE

NO EVIDENCE COULD BE FOUND OF ORIG. OR ROSE'S.

SURVEY COULD BE FOUND AT THIS TIME

ESTABLISH APPROX. 1/4 COR ON 12-15-83 CK

ROSE'S TIE TO SOUTH CROSS CREEK 140' WOULD BE

REASONABLE - NO DEFINITE CREEK AS AREA IS FLOODED

NOW BY BEAVER POND

LINE FROM SE COR. SEC. 7 SHOULD HAVE BEEN RUN AT

N2°30'E AS OUR LINE ON 12-6-83 FELL 120' TO FAR WEST

OF APPROX. POSITION ESTABLISHED ON 12-15-83

EAST BOUNDARY

AT MOOSE LAKE

MEANDER CORNER BET. SEC'S. 7+12

NOTES OF ORIG. GOV'T. SURVEY 1891

SET WOOD POST

BIRCH 18 S73W 43 LKS.

ASPEN 14 S15E 90 LKS.

NOTES BY JOHN J. ROSE (RHS) 12-11-25

FOLDER #5 PAGE 111

FD. NO TRACE OF POST

SET NEW ASH POST FOR MC

FOUND BOTH BT'S. DOWN

SEARCHED FOR THIS CORNER IN 1974, BUT WAS
UNABLE TO FIND ANY EVIDENCE - LAKE WAS UP
FROM ROSE'S. TIME - BASED ON AMOUNT OF
TREES (WINDFALLS) LYING IN LAKE

9-13-1974 C.K. + J.P.

CURT KRAUSE & JOHN PIERSON

QUARTER CORNER BET. SEC'S. 13 & 18

NOTES OF ORIG. GOVY. SURVEY 1891

SET WOOD POST

ASPEN 10 N23E 30 LKS.

ROSE FOUND ROTTED DOWN

ASPEN 10 N89W 5 LKS.

ROSE FOUND ASPEN STUMP

NOTES BY JOHN J. ROSE (RLS) 11-30-25

FOLDER #5 PAGE 121

FOUND STUMPS OF BT'S

SET NEW BALSAM POST 4"X4" MKD

1/4 S18 E & 1/4 S13 W

MKD NEW BT'S.

POPLAR 6 N54 1/2 W 6.0'

FD. ROTTED WINDFALL WITH RUSTED TAG N48W 6.0'

POPLAR 6 S60 E ^{4.5'}_{7.5'}

FD. ROTTED WINDFALL WITH RUSTED TAG S53E 7.5'

NOTES BY L.W. JOHNSON 2-13-34 ON 874

FD. ASPEN 5 S48 E 8 LKS. MKD 1/4 S13 BT

FD. ASPEN 8 N55W 9 LKS. " 1/4 S18 BT

POST ROTTED + BURNED

PLACE FSLP ON BOTH ABOVE BT'S. - THESE

ARE ROSE'S. BT'S. FROM 1925 - WE USED ROSE'S

DISTANCES FOR ESTABLISHING COR.

FROM SEC. COR. 7, 12, 13 & 18 SOUTH TO

1/4 COR. ROSE'S. DISTANCE 2653'

10-29-82 CK-JA-6B

CHAINED 1250' S87E FROM 1/4 SEC. 13

FOUND BOTH OLD FSLP'S ON GROUND UNDER

ASPEN WINDFALLS VERY RUSTED FROM THESE

WE REESTABLISH LOCATION OF 1/4 COR.

NO EVIDENCE REMAINS OF ROSE'S. POST

ASPEN LOG WITH TAG N48W 6.0' BOTH WELL ROTTED

ASPEN LOG WITH TAG S53E 7.5'

SET 3" SQD. ASH POST 36" HIGH WITH 1 OLD TAG

NAIL AT TOP - PLACE OTHER TAG ON ASPEN STUB

7' SW OF ASH POST

PUT FSLP ON 9" ASPEN S83E 9.5'

CHAINED NORTH (N1E) FROM THIS COR. AND FOUND SEC.

COR. TO NORTH AT DISTANCE 2653'

OLD FIELD OR HOMESTEAD IS SW AND OLD TRAIL FROM

E THEN NW IS 100'S OF 1/4 COR.

5 G-21

QUARTER CORNER BET. SEC'S. 11+12
NOTES OF ORIG. GOVY. SURVEY 1896
SET WOOD POST

ASPEN 6 N24 1/2 E. 15 LKS.

ASPEN 6 N44 W 24 LKS.

NOTES BY JOHN J. ROSE (RLS) 1-11-26

FOLDER #5 PAGE 114.

FOUND BOTH BT'S. DOWN

SET NEW SPRUCE POST

ROSE'S DISTANCES

FROM S.C. 11,12,13+14 NORTH TO 1/4 11+12 = 2652'

FROM 1/4 11+12 EAST TO 1/4 7+12 = 3926'

11- 12

ED ITASCA CO MONUMENT WC TO 1/4 12 AND
GPS. SURVEY GRADE, CORNER ON NORTH EDGE
OF BEAVER POND.

BASS WOOD 10" N48 W 57.96

MAPLE

CC

~~DISTANCE FROM SEC. COR. 11,12,13+14 NORTH
TO 1/4 COR. 2652'~~

9-27-74 CK

CHAINED SOUTH FROM SEC. COR. 2640' SEARCH SWP.
BUT FOUND NO EVIDENCE OF POST OR BT'S.

SET ASPEN PICKET AT 2640'S + PUTESLP ON
4" MAPLE 40' NORTH OF PICKET - SEARCH WAS NOT
GOOD NOW AS SWP. HAD 2 1/2' OF WATER STANDING
SHOULD SEARCH AGAIN IN DRYER. SUMMER

ALSO DIDN'T HAVE ROSE'S NOTES AT THIS TIME
40' N OF APPROX. COR. LV. SWP - VERY WET 2 1/2' WATER
160'S " " " " " " " " " "
280'E " " " " " " " " " "
250' W " " " " " " " " " "

L-21

QUARTER CORNER BET. SEC'S. 13 & 14

NOTES OF ORIG. GOV'T. SURVEY 1896

SET WOOD POST

ASPEN 9 S71W 59 LKS.

ASPEN 9 S47E 25 LKS.

NOTES BY JOHN J. ROSE (RLS) 12-8-25.

FOLDER #5 PAGE 127

FOUND SQUARD POST WITH ROCKS PILED AROUND
THIS MARK WAS PLACED WHERE THE ORIG. POST
STOOD BY MYSELF AND BROTHER, ABOUT 18 YRS.
AGO - OLD BT'S ARE GONE

11-21-86 WILLIAM OKERMAN RLS 6807

UNDER CONTRACT WITH FOREST SERVICE

SET 2" x 5' IRON PIPE WITH BRASS CAP MRKD.

TISONR 28W

4

S14 | S13

1986

RLS NO 6807

WITNESSED BY

MAPLE 13 N1W 31.64' MRKD E¹/₄ S14 BTW. PINE 21 S72E 15.45' MRKD W¹/₄ S13 BTMAPLE 7 S34W 14.58 MRKD E¹/₄ S14 BT

8' STEEL SIGN POSTS NORTH 4.0' + WEST 4.0'

DOCUMENT # 384801

CC

CERTIFICATE FILED

10-24-82

10-28-82 CK-68-JA

CHAINED FROM C¹/₄ SEC. 13 N89W - 2689' AND
FOUND ROCK MOUND BY J. ROSE - POST ROTTED DOWN
DISTANCE CHECKED GOOD FROM 2 OTHER DIRECTIONS
CHAINED NORTH FROM SEC. COR. 2695' N AND CONT.
NORTH FROM ¹/₄ COR. AT N8E - 2639' TO SEC. COR.
TO NORTH - SET 2" x 2" x 5' ASH POST IN MOUND
OF ROCK'S (ROSE'S) FOR TRUE ¹/₄ COR.

PUT FSLP ON 21" W. PINE S72E 15.45'
FOUND CABIN SITE (STATED BY ROSE) AT N74E
APPROX. 90' HOLE IN GROUND AND OUTLINE OF
CABIN IS VISIBLE - ON HARDWOOD KNOLL
FD. WELL ROTTED REMAINS OF ORIG. ASPEN STP.
S71W - 38.9' PLACE ASH STAKE IN STUMP
FD. DEPRESSION AT BRG. 4 DIST S47E 16.5'
WELCH LAKE BR. W APPROX. 300'

7
QUARTER CORNER BET. SEC'S. 12 & 13

NOTES OF ORIG. GOV'T. SURVEY 1896

SET WOOD POST

ASPEN 9 S65E 6 LKS.

1925 Fd. POPLAR (DOWN) MKD 1/4 S

SPRUCE 8 N20E 11 LKS.

1925 Fd. SPRUCE (STANDING) MKD 1/4 S

NOTES BY JOHN J. ROSE (RLS) 11-25-25

FOLDER #5 PAGE 110 & 118

SET NEW POST BALSAM 3"x4" MKD 1/4 S 12 N

1/4 S 13 S NO POST FOUND

CC

2641.9' W TO SEC. COR. 11, 12, 13 & 14

1282' E TO SEC. COR. 7, 12, 13 & 18

10-27-82 CK-GB-JA-JW

CHAINED NORTH OF CN 1/16 SEC. 13 1391' + CHAIN

FROM SEC. COR. WEST 1282' AT INTERSECTION

OF BOTH LINE A SEARCH WAS MADE FOR POST

NO POST WAS FOUND - BUT DID FIND SPRUCE STUMP

N20E 7.3' WELL ROTTED - A LARGE PINE HAS FALLEN

OVER STUMP WHICH WE DISMANTLED TO FIND STUMP

NO EVIDENCE OF ASPEN STUMP REMAINS

SET 3"x3"x5' ASH POST AT BRG + DIST. FROM

SPRUCE STP. - FILED 5 LARGE ROCK AROUND POST

MKD TEMP TIES

MAPLE 6 S46W 25.45' NAIL + TAG

ASPEN 8 S49E 33.7' " "

MAPLE 4 S80E 6.1 FSLP

FOUND OLD CABIN SITE ROSE TIED TO TO W OF COR.

12-5-83 CK-JA-6B

RAN LINE FROM SE COR. SEC. 12 AT N85W - 1282.5'

Fd. S 1/4 SEC. 12 - CORRECT BEARINGS OF LINE SHOULD

BE RUN AT N81W AS OTHER LINE FELL 85' SOUTH

OF RECOVERED 1/4 COR.

CENTER NORTH 1/4 IN SEC. 13

NOTES BY JOHN J. ROSE RLS IN 1925

SET WOOD POST

MHD BT'S.

W. ASH 12 N40E 34.5'

NOW 20" LIVING ASH N49E 34.5' ^{SCAR TO COR.} BT TAG + NAIL

BIRCH 20 S43W 34.0'

NOW LARGE BIRCH WINDFALL S56W 34.0' ^{IS WELL ROTTED} FACE OF STUMP

10-27-82 CK-GB-JW

CHAINED SOUTH FROM 1/4 BET. SEC'S. 12+13 1391'

FELL 23' EAST OF COR. - IN LOWLAND ASH SWALE

SET 4" SQD. ASH POST TO MARK CORNER

FSLP ON ASH 6 S4E 6.3' FROM ASH POST

FD. BOTH OF ROSE'S BT'S.

TEMP. TIE ASH 8 WEST 39.5' BT TAG + NAIL

PLACE 3 LARGE ROCK AROUND ASH POST

10-28-82

ASH 6 S4E 6.3' NAIL + TAG FSLP

ASH 8 WEST 39.5' " "

ASH 20 N49E. 34.5' " "

CENTER QUARTER TO SECTION 13

NOTES BY JOHN J. ROSE (RLS) 12-8-25

FOLDER #5 PAGE 125

SET POST NO POST FOUND

POPLAR 15 S6E 2.5'

Fd. POPLAR STP. LARGE S10W 2.5' WELL ROTTED

POPLAR 16 N77E 22.5'

Fd. POPLAR STP. LARGE N88E 22.5' WELL ROTTED

10-28-82 CK-6B-JA-JW

CHAINED AND BLAZED LINE SIW FROM CN#116

OUR DISTANCE 139' END OF CHAIN FELL WITHIN

6" OF TRUE COR.

SET 4" SOD. FISH POST 5' LONG AT COR.

PLACE 4 LARGE ROCK AROUND POST

OLD E+W TRAIL IS 44' NORTH OF COR.

PLACE 2"x2"x48" ASH POSTS IN BOTH ASPEN STAMPS

MKO TEMP TIES

FISH	18	N17W	56.4'	NAIL & TAG	
MAPLE	5	N72W	43.7'	"	"
MAPLE	4	S32E	32.8'	"	"
BALMIE	9	S37W	12.4'	"	" FSLP

CENTER SOUTH $\frac{1}{16}$ IN SECTION 13

NOTES BY JOHN J. ROSE (RLS) 12-10-25

FOLDER #5 PAGE 127

SET TAM POST

TAM. 8 S56W 3.4'

TAM. 7 S69E 8.3'

10-26-82 CK-JA-6B

CHAINED DUE SOUTH FROM APPROX. C $\frac{1}{4}$ SEC. 13

1273' INTO TAM. SWAMP-FLOODED BY WELCH LAKE

IMPOUNDMENT - SEARCH FOR CS $\frac{1}{16}$ IN VERY

WET FLOATING BOG - NOTHING FOUND AT THIS TIME

IF WE LOWER POND OF IMPOUNDMENT IN YEAR

TO COME - MAY BE POSSIBLE TO FIND COE.

11: QUARTER CORNER BET. SEC'S. 11 & 14

NOTES OF ORIG. GOVY. SURVEY 1896

SET WOOD POST

ASH 8 S11W 18 LKS.

BIRCH 9 N40W 19 LKS.

J-19

CERTIFICATE FILED 11

3-3-81 CK-68

CHAINED 2640' W OF SEC COR. 11-12-13 & 14

NO EVIDENCE OF CORNER WAS FOUND

PUT FSLP ON 14" ASH AS APPROX. 1/4 COR.

BLAZED ASH ON 4 SIDES

10-16-86 WILLIAM OKERMAN UNDER
CONTRACT WITH U.S. FOREST SERVICE

CORNER SET MIDPOINT BET SEC. CORNERS

SET 2" X 48" IRON PIPE WITH BRASS CAP MKD.

T150NR28W

1/4 S11
S14

1986

WITNESSED BY

RLS NO 6807

ASH 9 N75W - 34.77' MKD. S1/4 S11 BT

ASH 12 N8E - 61.58' MKD. 1/4 S11 BT

ASH 10 S2W - 17.07' MKD. N1/4 S14 BT

8' STEEL SIGM. POSTS WEST 4.0' + EAST 4.0'

DOCUMENT # 384800

QUARTER CORNER) BET. SEC'S, 14 & 23

NOTES OF ORIG. GOV'T. SURVEY 1896

SET WOOD POST

ASPEN 14 N 70W 4 1/2 LKS.

ASPEN 10 S 17E 12 1/2 LKS.

CERTIFICATE FILED

11-21-86 WILLIAM OKERMAN RLS 6807
UNDER CONTRACT WITH FOREST SERVICE
SET 2" X 4' IRON PIPE WITH BRASS -
CAP MARKED

T150NR28W

1/4 S14

S23

1986

RLS NO 6807

WITNESSED BY

ASH 5 N12E - 79.22' MKD 1/4 BT

ASPEN 9 N44E - 96.53' MKD S 1/4 S14 BT

ASPEN 7 N46W - 97.42' MKD S 1/4 S14 BT

8' STEEL SIGN POSTS NORTH 4.0' & EAST 4.0'

CORNER IS NORTH OF COUNTY ROAD 31

EAST & WEST

DOCUMENT # 384802

QUARTER CORNER BET. SEC'S. 35+36

NOTES OF ORIG. GOVT. SURVEY 1896 - 11

SET WOOD POST

SPRUCE 8 534 W 8 LKS. 5.3'

SPRUCE 8 NIDE 22 LKS. 14.5'

NOTES BY JOHN J. ROSE RLS 1926

FOLDER #13 PAGE 10

FOUND BT TO SEC 35 STANDING

BT TO SEC 36 DOWN

NO TRACE OF OLD POST

SET SPRUCE POST 4 X 4 FOR 1/4 COR.

874 BY H. C. NORMAN 9/27/35

Fd. TAM. POST FAIR CONDITION - 3" X 3" X 16"

NO BT'S. FOUND

PUT FSLP ON 10 BIRCH N80E 62 LKS. - 40.9' - FROM BIRCH

TO COR.

ROSE'S RUNNING NOTES FROM SEC. COR. NORTH

2500 ENT. SWP. E & W

2700 LV. SWP.

2764.1 24.35' EAST OF 1/4 COR.

5/27/87 GB, JA, JW,

Chained north ^{10' west} from approx. SW sec. corner of

sec. 36 2764'. Fd. no evidence of corner position

Searched with metal detector for C.C. tag 100'

E-W of compass line. At 2550' north of approx.

sec. corner, enter swamp p. leave swamp at

approx. 2750'. Placed F.S.-L.P. on 10'

Aspen 10' north of 2764' to mark approx 1/4 pos.

14 SOUTH SHORE HENDRICKSON LAKE

MEANDER CORNER BET. SEC'S. 25 & 26

NOTES OF ORIG. GOV'T. SURVEY 1896

SET ASH POST

ASPEN 12 S5W 38 LKS. 25.1'

BIRCH 14 S20E 42 LKS. 27.7'

Quarter corner bet. Secs. 25 & 26
Notes of Orig. Gov't. Survey 1896
Set Wood Post

ASPEN 12 S5W 38 LKS. 25.1'

BIRCH 14 S20E 42 LKS. 27.7'

Tree	Count	Bearing	Distance	Height
ASPEN	12	S5W	38 LKS.	25.1'
BIRCH	14	S20E	42 LKS.	27.7'

QUARTER CORNER BET. SEC'S. 33 & 34

NOTES OF ORIG. GOV'T. SURVEY 1896

SET WOOD POST

HSPEN 12 S24W 4 1/2 LKS. 310'

HSPEN 14 N14E 4 LKS. 216'

QUARTER CORNER BET. SEC'S. 2435
 NOTES OF ORIG. GOVT. SURVEY 1896
 SET BALSAM POST

BALSAM 7 S70E 15 LKS. 9.9'

ASPEN 10 N50E 51 LKS. 33.7'

NOTES BY JOHN J. ROSE RLS 1926

FOLDER #13 PAGE 8

FOUND 14" ASPEN STUB MARKED 1/4 S ON
 SW SIDE AND FOUND ROOTS OF BALSAM
 SET 3x4x3 1/2 BALSAM POST TO MARK
 TRUE CORNER

874 CCC NOTES BY ~~ROY~~ H. NORMAN 9/26/35
 NELSON 3/9/35

FD. BALSAM STAKE - ROTTED OF AT BOTTOM 3"x3"x30"
 FSLP ON BIRCH 9 N24E 27 LKS. = 17.8'
 CORNER HAS VIRGIN TIMBER ON SOUTH SIDE AND SECOND
 GROWTH ON EAST SIDE - STAKE IS AMONG THREE PIECES
 OF LOGS

ROSE'S RUNNING NOTES TO EAST

668 ENT SWP. N4S

2370 LV. SWP. N4S

2471.8 @ HUB

2640 39.0' NORTH OF 1-2-35-36

10-27-87 CK-GB

CHAINED ROSE'S. DISTANCE OF 2640' FROM APPROX.
 NE COR TO SEC. 2 - RAN LINE AT N89W AND
 SET ASPEN PICKET AT CHAINED DISTANCE 2640'
 SEARCH IN AREA - NO EVIDENCE WAS FOUND
 NEED TO CHAIN INTO THIS AREA FROM ANOTHER
 DIRECTION

10-28-87 CK-JW-MH

FROM APPROX. 1/4 POSITION RAN LINE AT S2W
 AND CHAINED 2340'S AND FELL 5' WEST OF
 APPROX. C'1/4 SEC. 2 - ROSE'S DISTANCE WAS 2480'
 SO WE NEED TO MOVE STARTING POINT AT N'1/4
 SEC. 2 - 140' N AND ESTABLISHED APPROX N'1/4

11-2-87 CK-JA-BT

PLACED 2" ASH PICKET AT APPROX. N'1/4 SEC. 2
 PLACED FSLP ON 5" ASH SSE 19.0' FROM 2"
 PICKET - NOW WE SHOULD BE CLOSE TO ROSE'S,
 POSITION - STILL NO EVIDENCE WAS FOUND
 FROM THIS POSITION WE NOW FIT ROSE'S DISTANCES
 S TO C'1/4 - 2480' - EAST TO NE COR SEC. 2 - 2640'
 AND WEST TO MC AT WAGNER LAKE - 2280'

SECTION CORNER TO SECTIONS 1, 2, 35+36

NOTES OF ORIG. GOV'T. SURVEY 1896

SET ASH POST

BIRCH 16 S50E 31 LKS.

ROSE FOUND THIS BT DOWN IN 1926

BIRCH 8 S37W 45 LKS.

SPRUCE 4 N45W 21 LKS.

SPRUCE 6 N23E 15 LKS.

NOTES BY JOHN J. ROSE RLS 1926

FOLDER #13 PAGE 9

FOUND BT TO SEC. 1 DOWN ALL OTHERS
HAVE BEEN GROBBED OUT IN ROAD CONSTRUCTION
E+W

SET BALSAM POST FROM ORIG. BT.

BIRCH 16 S50E 31 LKS.

874 BY H. ADAMS 6/28/35

FOUND SCRIBED POST - GOOD CONDITION 36" LONG

NO EVIDENCE OF BT'S.

PUT FSLP ON BIRCH 8 SOUTH OF CORNER 10 LKS. = 6.6'

CK

10-14-87 8" BIRCH ON WEST SIDE OF ~~FR~~ FR 3330

RIBBON ON BIRCH MKD. 493' N88W TO APPROX. SEC.

CORNER - HOLE + ROTTED CCC POST ON GROUND
AT BASE OF BIRCH - NEED TO MARK THIS LINE

2-23-81 CK-BT

FROM FSBC IRON PIPE AT SE COR. SEC. 2 RAN LINE

NORTH BET. SEC'S. 1+2 - CHAIN ROSE'S. DISTANCE

OF 2635' TO APPROX. 1/4 COR. BET. SEC'S. 1+2

OUR LINE AT THIS POINT FELL TO FAR WEST OF 1/4

POSITION BASED ON TIES BY ROSE E+W

BLAZED 10" W. SPRUCE ON 4 SIDES AS APPROX. COR.

AT EAST EDGE OF N+S SWAMP - CONTINUE LINE

NOW AT NZE FROM APPROX. 1/4 BET. 1+2

CHAINED ROSE'S. DISTANCE OF 2445' AT END

OF LINE WE CHECK LAND TIES E+W - WE NOW

MOVE OUR LINE 70' W TO FIT TIES BETTER

BLAZED 4" ASPEN 4 SIDES AS APPROX. SEC. COR.

SEARCH IN THIS AREA FOR ANY EVIDENCE OF

ORIG. OR ROSE'S. - NOTHING COULD BE FOUND AT

THIS TIME - SNOW COVER + FROZEN

10-14-87 CK-RM

FROM NE COR. SEC. 1 WHICH IS FSBC IRON PIPE

RAN LINE AT N88W - 5160' ROSE'S. DISTANCE

FOR NORTH LINE OF SEC. 1 - OUR LINE AT STA.

4667' OF FR 3330 (WHITES SPUR) CONTINUE

TO 5160' AND PLACED TAG ON 10" BALMIE - N11W

9.5' FROM ELM STAKE SET AT END OF CHAINING

USE BACK SIDE OF BT TAG ON BALMIE AS WE

DIDN'T HAVE FSLP WITH AT THIS TIME

THIS POSITION SHOULD FIT TRUE LOCATION

25' WEST OF LOCATION USED ON 2-23-81 CK

QUARTER CORNER BET. SEC'S. 1436

NOTES OF ORIG. GOVT. SURVEY 1896

SET BALSAM POST

ASPEN 7 S28W 9 LKS.

TAM. 8 N40W 24 LKS.

NOTES BY JOHN J. ROSE 12-2-27

FOLDER 15 Pg. 80

STATION 2579.65 PROPORTIONATE DISTANCE

ON NORTH LINE OF SEC. 1

SET ASH POST 3x4

MKD 1ST'S.

ASPEN 10 N40E 10.3'

SPRUCE 22 S10E 11.0'

10-14-87 CK-RM

CHAINED FROM NE COR SEC. 1 FSBC IRON PIPE

CHAINED ROSE'S. DISTANCE 2580' - WE RAN

LINE AT N88W - AND CHAINED 2580'

SEARCH AREA FOR EVIDENCE OF ROSE'S. COR.

FD, SPRUCE STUMP WELL ROTTED AT SSE

11.0' FROM 1" BIRCH STAKE AT APPROX. COR.

NO TRACE OF ASPEN TO NE

PLACED FSLP ON 6" N. PINE. N52E - S. 2'

FROM 1" BIRCH STAKE AS APPROX. 1/4 COR.

CONTINUE LINE N88W TO SEC. COR.

CORNER IS AT NORTH EDGE OF OLD BEAVER

POND TO SOUTH - APPROX 10.50' SOUTH OF

FR 2229 WITH JUNCTION WITH FR 7618 LEADING

SOUTH - THIS TRAIL IS VERY BRUSHY.

19 K-5

NORTH 1/16 BET. SEC'S. 17418

NOTES BY J.J. ROSE (RLS) 1941

FOLDER 4 PAGE 39+43

SET 1" GALV. I.P.

MKD NEW BT'S.

ELM 14 NW 72.2'

NOW 16" ELM N24W 72.2' SCAR TO COR.

MAPLE 4 SE 67.3'

NOW 9" MAPLE S29E 67.3' SCAR TO COR.

ASPEN 6 NE 44.3'

NO EVIDENCE

10-13-82 CK-JA-68

Fd. IRON PIPE IN PLACE IN $\frac{1}{4}$ OF OLD HWY 4

3" BELOW ROAD - SET MAG. PELLET UNDER IRON

NAIL + BT TABSON ROSE'S. BT'S.

MKD NEW TIE

ASH 5 N45E 41.4' NAIL + TAG

FSLP ON ELM 16 N24W 72.2'

OLD FIELD TO SW

Fd. WITNESS IRON 1" 16' EAST OF COR.

CC

19

QUARTER BETWEEN SEC'S. 6 & 7
 NOTES OF ORIG. GOV'T. SURVEY 1896
 SET WOOD POST

SPRUCE 8 N70W 12 LKS.
60^d SPK IN STUMP - SET 2 1/2" X 36" ASH POST ON BACK SIDE
 Fd. WELL ROTTED SPRUCE STUMP AT N70W 7.9'

CEDAR 22 S15W 12 LKS.
SPK ON E SIDE & TAGGED - FAIRLY SOLID - BARBED WIRE INSIDE
 Fd. LARGE BURNED CEDAR STUB 5' HIGH AT S15W 7.9'

NOTES BY JOHN J. ROSE (RLS) 1948
 FOLDER 12 PAGE 14

FOUND ORIG. BT'S WERE FIRE KILLED
 SCRIBE ON CEDAR WAS NEARLY BURNED
 OUT - Fd. ROOTS OF DECAYED SPRUCE

SET 1" IRON PIPE AT TRUE CORNER
FLAT N SIDE MKD 1/4 56 - S SIDE MKD 1/4 57
 Fd. 1" X 24" IRON PIPE MARKING CORNER ALSO 3" X 36" CEDAR POST

MKD NEW BT'S.

BASSWOOD 7 NORTH 16.3'

NOW 11" BASSWOOD (HOLLOW) AT S54W - 20.3' OPEN SCAR

ASH 4 S57W 24.6'

NOW 9" ASH (HOLLOW) N1E - 18.2' SCAR FACING CORNER

ROSE'S IRON IS 2" HIGH - CEDAR POST AT SOUTH SIDE OF IRON

2655.8' FROM SECTION CORNER 5, 6, 7 & 8
 TO 1/4 BETWEEN SEC'S. 6 & 7

4/29/92 CK

MARKED NEW BT'S. TO ROSE'S IRON

ASH 7 N48E - 10.85' MKD 1/4 56 BT

ASH 6 S58E - 20.83' " 1/4 57 BT

ASH 5 1/2 S67W - 7.23' " 1/4 57 BT

8' STEEL SIGN POSTS WEST 4.0 - SOUTH 4.0'

CORNER IS IN HARDWOODS & ASH - VERY WET NOW

CORNER IS SW OF THE SW CORNER OF OPEN FIELD - 300' APPROX.

SECOND FIELD SOUTH OF ORTH ROAD #30

OLD OPEN LINE OR OLD ROAD SOUTH OF COR. THROUGH
 HARDWOODS

MANY BURNED CEDAR STUMPS & WINDFALLS IN AREA

QUARTER CORNER BET. SEC'S. 1412

NOTES OF ORIG. GOVT. SURVEY 1896

SET WOOD POST

SPRUCE 7 N30E 19 LKS.

MAPLE 10 S10E 27 LKS.

NOTES BY JOHN J. ROSE (BLS) 12-11-25

FOLDER #5 PAGE 113

CHAINED EAST ON OLD ROAD OVERGROWN

WITH BRUSH - 2644' E FOUND OLD POST

SET BY CHAS. JOHNSON & H. B. ELDRED

WHEN THEY SURVEYED TOWN ROAD BETWEEN

SEC'S. 1412 AT THIS POINT THEY FOUND THE

OLD POST DOWN AND DROVE A POPPLE STAKE

PLACING THE TOP OF THE OLD POST AGAINST IT.

I FOUND POPPLE STAKE AND TOP OF OLD POST

9-13-74 GK-JP

FROM P.I. OF ROAD TANGENTS SOUTH + WEST
CHAINED EAST TO MOOSE LAKE TO CHECK DISTANCE
GOVT. DISTANCE 17.40 CHS. OR 1148.4' - FROM OUR
STARTING POINT WE CHAINED 1148' WHICH FELL
IN LAKE BY 10' - SEARCH IN AREA, BUT NO
EVIDENCE COULD BE FOUND AT THIS TIME

GO BACK TO APPROX. 1/4 1412 - NO EVIDENCE
COULD BE FOUND - WE CHAINED WEST ALONG
ROAD FROM APPROX. 1/4 POSITION AT 1320' W
RD, FSLP ON 10" ASPEN TO NORTH OF ROAD
2585' W HIT FENCE LINE AND OPEN CUTLINE
IN SWP. TO NORTH APPROX. SECTION LINE

MEANDER CORNER BETWEEN SEC'S. 14+12

NOTES OF ORIG. 600' T. SURVEY 1896

SET WOOD POST

FSH 10 N79W 33 LKS.

FSH 12 S80W 31 LKS.

57.40 CHS. BET. SEC'S. 14+12

③ SOUTH 3.00 CHS. THEN EAST 3.40 CHS.
TO INTERSECT RANGE LINE AT MC BET.
SEC'S. 7+12 GIVING TOTAL OF E LINE
 $57.40 + 3.40 = 60.80$ CHS.

SEARCHED FOR THIS CORNER IN 1974 - NO EVIDENCE
WAS FOUND - DISTANCE CHAINED FELL IN HEAVY
BRUSH NEAR SHORE LINE - MANY WINDFALLS
LYING IN LAKE

9-13-1974 CK+J.P.

CHAINED 1148' EAST OF APPROX. $\frac{1}{4}$ BET SEC'S. 14+12
THEN RAN MEANDER NOTES - SOUTH 3 CHS. = 198'
THEN EAST 3.40 CHS. = 224.4' TO NORTH M.C.
1992 FD. OLD RIBBON TIED IN BRUSH NEAR SHORE
LINE FROM 1974 - SEARCHED AGAIN WITH ITASCA CO.
TIM WOTZKA (RLS) NO EVIDENCE COULD BE FOUND

Curt Krause

CENTER SOUTH 1/16 IN SECTION 12

NOTES BY JOHN J. ROSE (RLS) 12-11-25

FOLDER 5 PAGE 113 BOTTOM

SET BALSAM POST

MKD BT's.

BIRCH 18 N153°E 6.5'

BALSAM 5 N44°16W 17.6'

ON NORTH SIDE OF MARSH

CENTER QUARTER CORNER IN SECTION 12

NOTES BY JOHN J. ROSE RLS IN 1925

FOLDER 5 PAGE 151

SET POST CEDAR

Fd. 4" X 12" CEDAR POST POINT - IN ASH SWAMP

CEDAR ~~12~~ 12 N3E 6.2'

FOUND 12" CEDAR STUMP AT N11E 6.2' WITH TOP PART OF B ^{SCRIBE VISIBLE}

SPRUCE 8 S42W 7.2'

FOUND SPRUCE STUMP WELL ROTTED AT S50W 7.2'

12/14/83 CK-GB-JA

CHAINED N88W FROM APPROX. 1/4 BET. SECS. 7+12

ON RANGE LINE - OUR DISTANCE WAS 1308'

FOUND CEDAR POST POINT - IN PLACE - IN VERY

WET ASH SWAMP - PLACE ASH POST 3" SQD. X 7'

HIGH ALONGSIDE OLD POST POINT AND PLACE

FSLP ON 6" ASH S72W 10.0' FROM ASH POST

CORNER IS IN ASH LOWLAND WET SWAMP

50' W TO HIGHLAND POINT NW

80° E TO HIGHLAND RIDGE TO EAST

OUR LINE FELL 10' NORTH OF OLD POST BY ROSE

CENTER WEST $\frac{1}{16}$ CORNER IN SECTION 12

NOTES BY JOHN J. ROSE (RHS) IN 1925

FOLDER 5 PAGE 151

SET POST

BALSAM 10 N30W 10.2'

BASSWOOD 10 S85E 38.2'

CENTER SOUTH 1/16 SECTION 20

NOTES BY JOHN J. ROSE 4/19/27

FOLDER #17 PAGE 91

SET 1" X 36" IRON PIPE

MARKED BT'S.

BLK. ASH 5 1/2 N45E 5.9'

NOW 11 ASH N57E 5.9' SCAR FACING IRON

BLK. ASH 5 N52W 14.3'

NOW 11 ASH N40W 14.3' SCAR FACING IRON

Y. BIRCH 10 S57W 8.7'

ED. Y. BIRCH STP. MARKED "SE BT"

BLK. ASH 8 S63E 11.6'

NOW WELL ROTTED ASH STUMP S54E 11.6'

10/20/82 CK-JA-GB-JW

CHAINED NORTH FROM 1/4 BET. SEC'S. 20-29 - ROSE'S.

DISTANCE OF 1372.3' - OUR CHAINED DISTANCE

WAS WITHIN 1.0' AND LINE FELL 20' E OF IRON

FOUND 1" X 36" IRON PIPE - IN PLACE - IN ASH SWALE

ALSO FOUND 4 X 4 X 48" CEDAR POST BESIDE IRON

OLD FENCE LINE NE-SW IS 20' E OF IRON - WIRE MOSTLY

DOWN

MKD NEW BT.

ASH 10 S60W 36.4' NAIL + TAG

ASH 7 N9W 5.45' FSLP

SET NEW ASH POST 3 X 3 X 8' BESIDE IRON

CLOSING CORNER BETWEEN SEC'S. 1 & 2
 NOTES OF ORIG. GOVT. SURVEY 1896
 SET WOOD POST

BASSWOOD 9 S35W 32 LKS. = 21.12'

BASSWOOD 4 S30E 18 LKS. = 11.88'

9-23-74 CK-JP

FROM ORIG. $\frac{1}{4}$ CORNER, BET. SEC'S. 1 & 2

RAN LINE NORTH AND CHAINED 2597' N TO OPEN
 BRUSHED LINE BY ITASCA COUNTY - NO ORIG.

EVIDENCE COULD BE FOUND - PUT FSLP ON

BIRCH 11 N20W 14.0' FROM PICKET ON OPEN LINE

E+W-AS APPROX. CLOSING CORNER.

NEED TO SEARCH AGAIN AFTER WE CHECK WITH
 ITASCA COUNTY

INTERSECT NORTH BDRY 39.24 CHS. OR 2589.8'

CORNER TO SECTIONS 2-3-10-41
 NOTES OF ORIG. GOVT. SURVEY 1896
 SET WOOD POST

BIRCH 8 N68E 24 LKS. = 15.84'

BIRCH 10 S25 $\frac{1}{2}$ E 15 LKS. = 9.90'

SPRUCE 6 S29W 6 LKS. = 3.96'

BALSAM 10 N62W 16 LKS. = 10.56'

10/26/74 CK-JP

FD. OLD CCC CEDAR POST WITH RUSTED
 TAG WHICH WAS SHOT UP - WE COULDN'T READ
 ANYTHING FROM TAG - NO INFO ON WHO SET
 POST OR TAG

PUT IN NEW 4X4X8' CEDAR POST 27' NORTH
 OF APPROX. LOCATION

ROAD CONSTRUCTION HAS DESTROYED ANY
 EVIDENCE OF ORIG. CORNER

874 CCC NOTES (NO NAME OR DATE)

FD. STAKE - POOR CONDITION - 24" LONG
 NO BT'S. LOCATED

DOESN'T BELIEVE THIS IS ORIGINAL COR.
 NOTE ON FRONT: WHEN TOWNSHIP ROAD
 WAS BUILT - STAKE WAS THROWN
 BESIDE ROAD

FSLP ON ASPEN 4" ON SOUTH SIDE OF
 ROAD - CORNER BEARS S2°E
 APPROX. 66'

QUARTER CORNER BETWEEN SECTIONS 2+3

NOTES OF ORIG. GOV'T. SURVEY 1896

SET WOOD POST

ASPEN 6 SB4W 24 LKS. = 15.84'

SPRUCE 6 N11W 8 1/2 LKS. = 5.61'

874 CCC NOTES BY GRILLY + KARLS 9-12-34

FD. BALSAM POST - GOOD CONDITION 36" HIGH

SCRIBED WITH SECTIONS

FD. SPRUCE 10 N5W 5.0' SCRIBED S3 BT

PLACED FSLP ON BALSAM 6" ON SW SIDE

CORNER BRS. S58W 5.0'

LINE BLAZED RUNNING NYS - BLAZED BALSAM

WINDFALL 8 FT. SW OF POST

9/20/74 CK-JP

CHAINED NORTH FROM APPROX. SEC. COR. 2-3-10-11

2620' AND BLAZED 6" BALSAM (4 SIDES) AS APPROX.

1/4 COR. - FD. SOME BALSAM STUMPS IN AREA

NO ORIG. EVIDENCE FOUND AT THIS TIME

SHOULD SEARCH AGAIN AND BRING IN METAL LOCATOR

RAN OUT OF TIME FOR GOOD SEARCH

FOUND TAG BY DUFF JOHNSON 1971 ON 12" ASPEN

APPROX. 60' WEST OF OUR LINE

$= 2560.8'$
38.80 CHS. CLOSING COR. BET. 2+3

CORNER TO SECTIONS 5-6-7+8

NOTES OF ORIG. GOV'T. SURVEY 1896

SET WOOD POST

ASH 6 S26E 23 1/2 LKS. = 15.51'

FALLS IN ROAD CLEARING

ASH 6 N54E 15 1/2 LKS. = 10.23'

FALLS IN OPEN GRASS MARSH (FROZEN NOW)

ASH 9 S12W 20 LKS. = 13.20'

FALLS IN ROAD CLEARING

ASH 14 N60W 14 LKS. = 9.24'

FALLS IN OPEN GRASS MARSH (FROZEN NOW)

NOTES BY JOHN ROSE 1946

FOLDER #4 Pg. 77 + (Pg. 76 HE FOUND COR. IN 1924)

FD. STUMP OF BT TO SEC. 6 - ALL OTHERS

DESTROYED - FROM ORIG. ASH STUMP

RAN S60E 9.24' FALLS IN OLD FENCE LINE

SET 1" GALV. IRON PIPE FOR PERMANENT COR.

MKD NEW TIES

1. BLK ASH 12 S16 1/2 E 24.5'

2. ELM 28 S25W 52.0'

1. NOW 14" ASH SIZE 24.5' SCRIBE CHOPPED OUT HAS BASE ^{SCAR.}

2. NOW 23" DEAD ELM SNAG S21W 52.0' SCRIBE VISIBLE

NO IRON COULD BE LOCATED AT COR.

CORNER IS 3' NORTH OF NORTH SHOULDER OF DRIVEWAY TO HOME

200' W OF HWY 46

4/29/92 CK

CULVERT UNDER ROAD IS 2' WEST OF COR.

7-15-96 L. KRAUSE R. MAEN

SET AN 8 FT STEEL SIGN POST 3 FT IN THE GROUND @
ROSE'S POSITION. POST IS 16.5 FT FROM NORTH END
OF CULVERT AND 12 FT NORTH OF PUT ROAD E.

CEDAR 18" S45° E 47.35 FT TO SPK MKD: BT

ASH 7" S18° W 48.15 FT TO SPK MKD: BT

ASH 4" S26° E 51.23 FT TO SPK MKD: BT

6-19-2012 R MAEN

GPS IRON SURVEY GRADE COORDS.

ITASCA Co NORTH N = 221411.673

E = 368541.878

QUARTER CORNER BET. SEC'S. 7418

NOTES OF ORIG. GOV'T. SURVEY 1896

SET WOOD POST

ASH 6 N25W 4 LKS. =

ELM 26 S25W 30 LKS. =

35.60 CHS. OR 2349.6' FROM 1/4 TO RANGE LINE

QUARTER CORNER BET. SEC'S. 7+8

NOTES OF ORIG. GOV'T. SURVEY 1896

SET WOOD POST

TAM. 8 N74W 17 LKS. = 11.22

10/2/12 fd. roots at bearing & dist.

TAM. 5 N24E 11 LKS. = 7.26

10/2/12 fd. roots at bearing & dist.

NOTES BY JOHN J. ROSE 4-28-48

FOLDER #12 Pg. 13

FD. PART OF ORIG. BT

FD. POINT OF OLD POST - DIRECTLY UNDER

FENCE LINE E+W

~~(497' WEST OF HWY 46 N¹/₁₆)~~

10/2/2012 Main & Hayes

On 10/1/12 Main recovers N¹/₁₆ pipe of Roses and at Rose's distance south finds remains of old wire fence E & W. Evidence of possible posts.

Today we uncover fence posts that have all leaned to the south. Fence posts are 6" to 8" dia & up to 7' tall. The fence posts have been most favored in this area; Tam, cedar swamp but dry today.

We found a 3" dia post point 24" long lying along side of one of the fence posts. We believe this

is the orig. post that Rose refers to. It fits the projection of the line from the sec. cor. ⁶¹⁵ thru Rose's N¹/₁₆ cor. and the doubled over dist we measured. Take survey grade GPS reading.

N 216061.930 Itasca Co.

E 3168550.774 N. Zone

Also found rusted rod spike with small piece of flagging lay on ground 4 ft south of post point that would be in line with some of the fence wire. The fence wire was very rusted & brittle.

At the recovered post pt set 3/4" alum Rod 5' long with 3" Alum Cap stamped from which bear;

16" Cedar N 20° E 45.30 ft scribed BT

16" Cedar S 52° E 37.85 ft scribed BT

FOUND BY
J. J. ROSE
1896

CORNER TO SECTIONS 27-28-33+34

CONTINUED FROM BOOK 1 Pg. 89

NOTES BY JOHN ROSE 1931

FOLDER 9 Pg. 80

FOUND BT'S. PERTAINING TO SEC'S. ~~27~~²⁸ + ~~33~~³³

SET 2 1/4" X 14" IRON PIPE FOR CORNER

AND MARKED NEW BT'S. FOR SEC'S. 27+34

POPLAR 7 N 6 E 36.7'

BLACK ASH 5 SITE 67.0'

8/17/93 R. MAIN C. KRAUSE

REPLACE CEDAR 4X4/W/ 8 FT STEEL SIGN POST 30.5 FT
NORTH. 1974 ELM 14" NOW A ELM STUB 16" X 48". 1974 ELM
8" NOW ELM STUB 9" X 12 FT.

MEANDER CORNER BETWEEN SECTION 1+36
ON EAST SHORE OF MOOSE LAKE

NOTES OF ORIG. GOV'T. SURVEY 1896

44.80 CHS. = 2956.0'

SET CEDAR POST

CEDAR 8 SOUTH 2 LKS. = 1.32'

ASPEN 6 N12W 6 LKS. = 3.96

8/18/92 GARY BRAMA - TIM WOTZKA - CURT KRAUSE
FOUND OLD BLAZED LINE E+W ALSO BLAZE ON SOUTH
SIDE OF PINE STUBS LYING ON GROUND - BLAZES PAINTED
WITH BLUE PAINT - 3 PINE STUBS ON HILL SIDE AND
AT TOP OF RIDGE FOUND 20" N. PINE BLAZED E-W-S
PROJECT KING TO LAKE SHORE AND FOUND CEDAR
WINDFALL LYING IN LAKE WITH ROLL OVER SCAR ON
NORTHERLY SIDE OF CEDAR - FLAT PART INSIDE - NO
SCRIBE - BLAZE WAS ABOUT 30" HIGH - CUT OUT PART
OF BLAZE AREA - NOW LYING ON BANK ABOVE STUMP
CEDAR STUMP - UNDER WATER

TIES TO STUMP IN LAKE

N. PINE 19 N49E 15.00' FSLP + NAIL

N. PINE 13 N30W 16.20' NAIL

BELIEVE THIS IS ORIGINAL CEDAR BT CK 8/18/92

MEANDER CORNER BETWEEN SEC'S. 34-35
ON NORTH SHORE OF WAGNER LAKE
NOTES OF ORIG. GOVT. SURVEY 1896
SET WOOD POST

COTTONWOOD 10 N30E 18½ LKS. 12.21'

ASH 8 N27W 37 LKS. 24.42'

5/14/87 CK-GB

CHAINED SOUTH FROM ¼ CORNER BET. SEC'S. 34-35
1162' AND FELL AT EDGE OF BOG - VERY SOFT

NO TRACE OF BT'S. OR POST

SEARCHED AREA FOUND SOME ROTTED OFF DOCK

POSTS EITHER LYING IN OR STANDING POINTS OF

POSTS - WILL HAVE TO TRAVERSE INTO AREA

FROM KNOWN CORNERS

NOTES BY JOHN J. ROSE OCT. 1922

FOLDER 1 Pg. 26

CHAINED SOUTH FROM ¼ COR. 1162.6'

FD. OLD STAKE AND 1 BT

CLOSING CORNER BET SEC'S. 243
 NOTES OF ORIG. GOV'T. SURVEY 1896
 SET CEDAR POST

FIR 5 S50E 15 LKS. = 9.90'

SPRUCE 9 S59½W 24 LKS. = 15.84'

78.80 CHS. = 5200.8' INTERSECT NORTH BOUNDARY

9/20/74 C.K. - J.P.

CHAINED NORTH 2560.8' FROM APPROX. ¼ W. BET
 SEC'S. 243 - RAN OUT OF SEARCH TIME. NEED TO
 COME BACK LATER - NO EVIDENCE FOUND

WITNESS COR. MEANDER CORNER BET. SEC'S.
15+16 ON SOUTH SHORE OF ISLAND LAKE
ORIG. GOV'T. SURVEY 1896
SET ASH POST

WILLOW 6' N77E 14 LKS. = 9.24'

WILLOW 6' S10W 18 LKS. = 11.88'

CERTIFICATE FILED

QUARTER CORNER BET. SEC'S 3 & 10

ORIG GOV'T SURVEY 1896

SET CEDAR POST

CEDAR 8 NB9E 12 LKS = 7.92'

SPRUCE 5 S69W 8 LKS = 5.28'

MEANDER CORNER BET. SEC'S. 3+10

ORIG. GOV'T. SURVEY 1896

SET BIRCH POST

ASPEN 76 N44E 45 LK_s = 29.70'

BIRCH 8 S60E 39 LK_s = 25.74'

MEANDER CORNER ON WEST SHORE
OF WILLIAMS LAKE BET. SEC'S. 10 & 15
ORIG. GOV'T. SURVEY 1896

SET IRONWOOD POST

ASPEN 8 N85W 29 LKS = 19.14'

— 8 S80W 28 LKS = 18.48'

MEANDER CORNER ON EAST SHORE OF
ISLAND LAKE BET. SEC'S. 10 & 15
ORIG. GOVT. SURVEY 1896
SET BIRCH POST

BALSAM 5 N88E 43 LKS. = 28.38'

BALSAM 6 S19E 40 LKS. = 26.40'

QUARTER CORNER BET. SEC'S. 31+32

ORIG. GOV'T. SURVEY 1896

SET ASPEN POST

BALSAM 8 S50E $9\frac{1}{2}$ LKS = 6.27'

ASPEN 6 S53W 16 LKS = 10.56'

QUARTER CORNER BET. SEC'S. 2 & 11

ORIG. GOV'T. SURVEY 1896

SET ASH POST

BIRCH 9 N62W 11 LKS. = 7.26'

ASPEN 7 S21E 15 LKS. = 9.90'

END OF
BOOK