



A000618367

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/24/2015 10:45:38 AM

AS DOC #: A000618367

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY MW Dep TX#: 128046

Page of 2
A000618367

Twp 142 Rge 26 Index No. C.0-05.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter of Section 6, Township 142 N., Range 26 W., 5th P.M.
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On _____ found _____

left monument as found lowered monument removed monument (explain)

On 12 Jan. 2005 placed a 1 inch by 30 inch Aluminum tube with aluminum cap
up 0.5 foot at East edge of small Swamp.

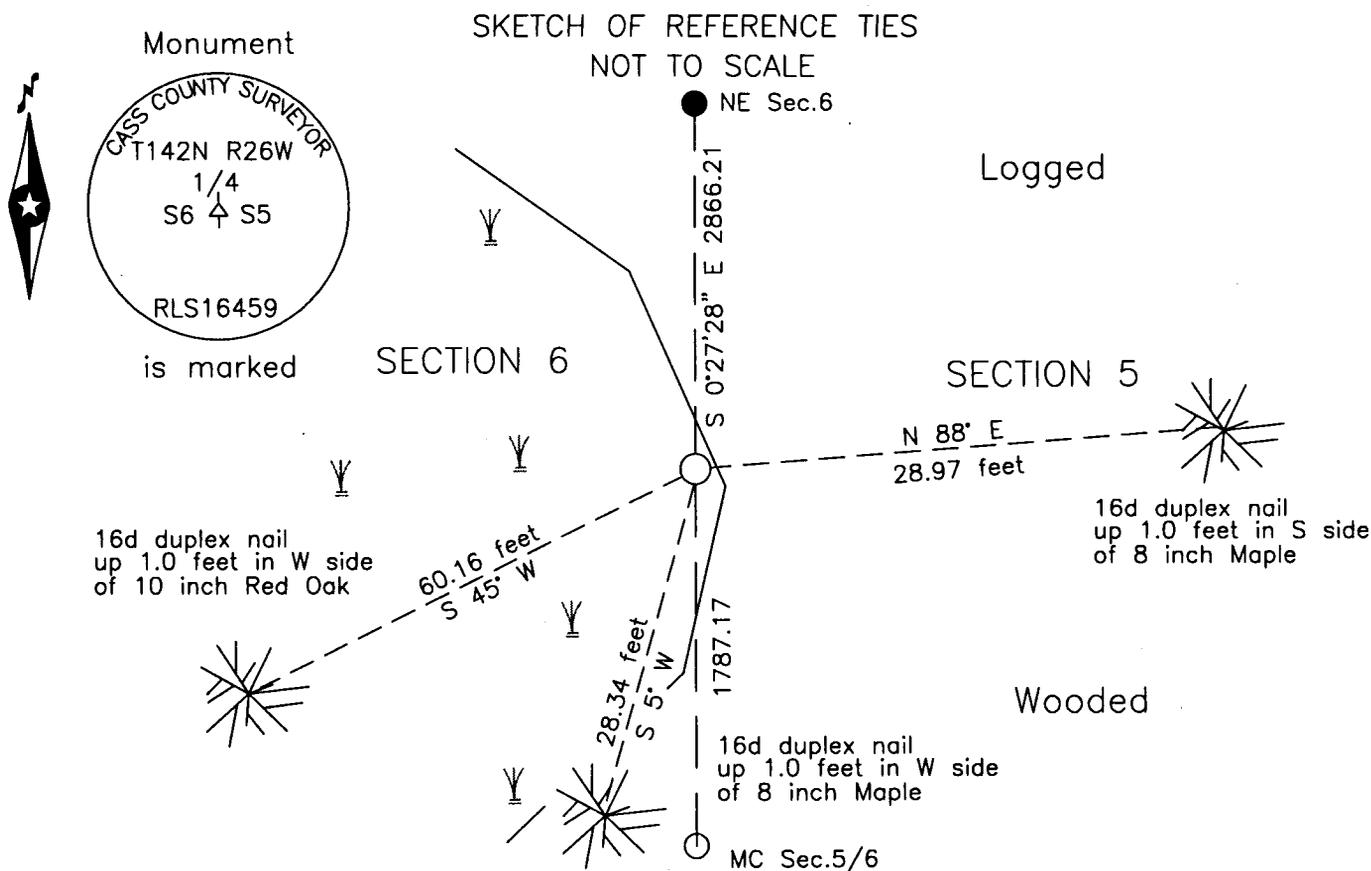

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 12/23/15 MN License No. 21367



Index No. C.0-05.0

Statement of Evidence

East Quarter corner Section 6, Township 142 North, Range 26 West, 5th Principal Meridian.

Nov. E.W. Griffin, General Land Office (GLO) Deputy Surveyor, in the notes of the subdivision of Township 142 North, 1872 Range 26 West, set a post for the original corner and referenced it as follows:
6" W. Pine S 75° E 7 links (4.62 feet) 8" W. Pine S 15° W 6 links (3.96 feet)
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

Jan. J.W.Curo, LS 1428, Cass County Surveyor, Survey Record 231, Book A, page 581, on file in the CCHD/SO, states 1911 "at 2640 hub at ¼ bet. Secs.5 & 6-142-26 ... The old trees are gone and we continue our transit line south."

June F.F.Wilson, Cass County Ditch #5, Shelf 2, Book 7, page 25, on file in the CCHD/SO, states "Run line E from 1916 ¼ between 5 & 6 ¼ bet. 5 & 6 Todd Cor."

Jan. B. Hippen, technician, records of the CCHD/SO, set a 1 inch outside diameter aluminum tube with aluminum 2005 cap, up 0.5 foot, at the proportionate position between the northeast corner of Section 6 and the Meander Corner between Sections 5 and 6, in east edge of a small swamp and witnessed as follows:
8" Maple N 88° E 28.97 feet 8" Maple S 5° W 28.34 feet
10" Red Oak S 45° W 60.16 feet

June B. Hippen, technician, records of the CCHD/SO, found aluminum tube with aluminum cap, in good condition, in 2015 small swamp, all 2005 witnesses are good.

The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set in 2005 by the CCHD/SO, is the accepted location of this corner.

County Coordinates (Cass County North)
Northing 224504.99
Easting 551866.03