

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 23, Township 142, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 6/19/80 found a decayed wood post and post point and evidence of
DATE
3 original GLO bearing trees.
- left monument as found, lowered monument, removed monument (explain)
- On 6/19/80 placed a 2" x 60" concrete filled galvanized iron pipe
DATE
with marked brass cap.


MONUMENT MARKED:

T142N R27W

S14	S13
S23	S22

 1980
 RLS. No. 12684

SKETCH OF REFERENCE TIES

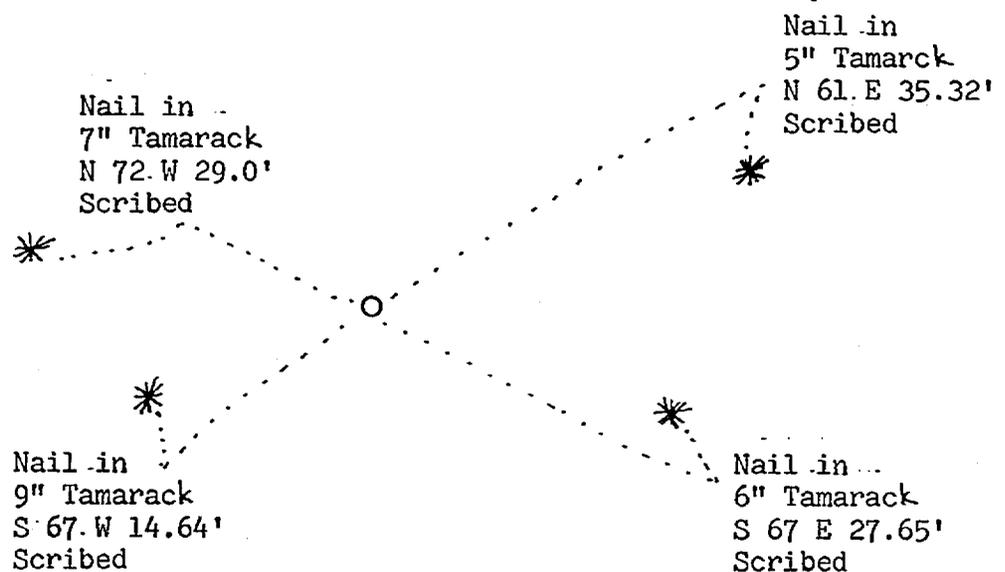

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mary H. Stevenson
SIGNATURE

12-29-81
DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:05 A.M. on the 31 day of Dec A.D., 1981

County Recorder Beulah Hardin

By MS, Deputy

DOCUMENT NO. 260979

Statement of Evidence:

- 1873 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: 5" Tamarack S 58 E 12 links, 5" Tamarack S 58 W 14 links, 6" Tamarack N 45 W 16 links, and 5" Tamarack N 46 E 12 links.
- 1980 USFS technician R. Olesen found a decayed wood post and post point in the ground from which the following evidence of the GLO bearing trees were found: Tamarack stump S 54 E 7.92', 6" tamarack stump N 50 W 10.56' with scar and curl, and a 6" Tamarack stump N 42 E 7.92' with scribed "BT" visible. The wood post point was replaced with a 2" x 60" concrete filled galvanized iron pipe with a marked brass cap. Four new bearing trees were marked and are shown on this certificate. Steel sign posts were set 2.9' north and 3.0' west of the corner.
- 1981 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1981 On Dec. 23, I visited the corner and found items as per 1980 USFS report. I accepted the post point as found as being the remains of the original corner as set in 1873.