

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


WEST 1/16th Corner of Section 10&15, Township 141, Range 29, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9/10/80 found a GLO iron pipe monument with a marked brass cap
DATE
in place as set in 1918.
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

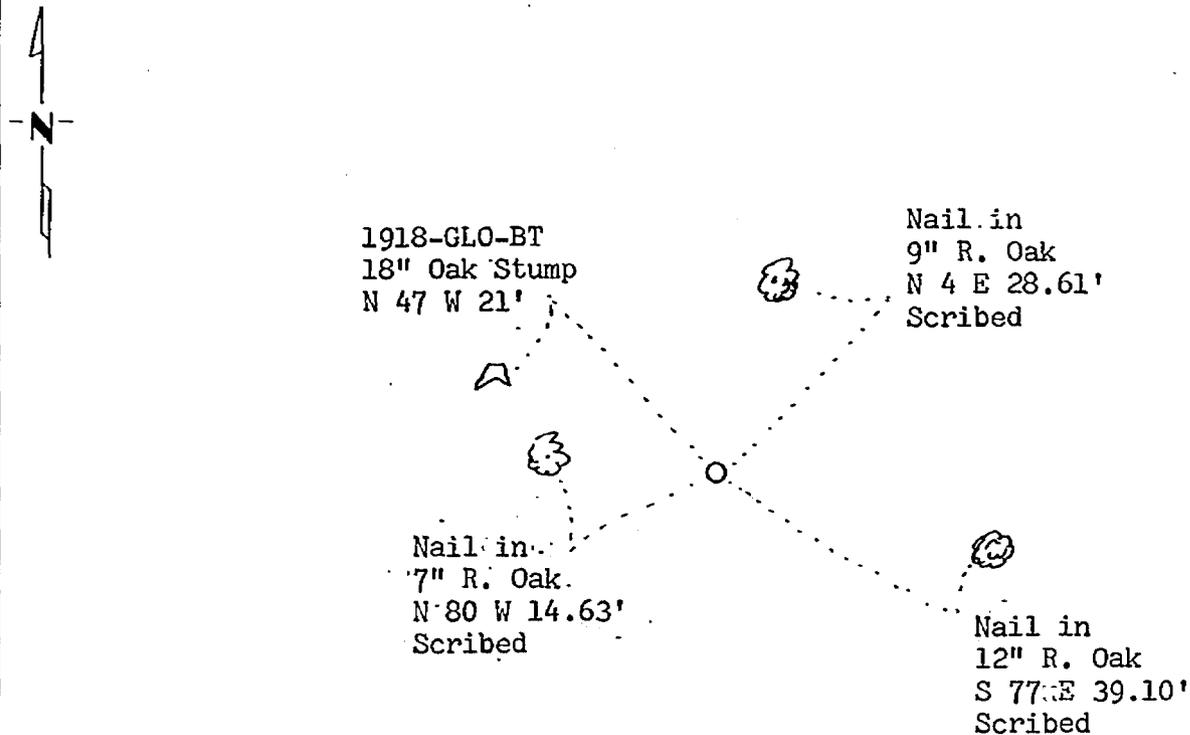

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

260991

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ray H. Stevenson 12-29-81
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:25 A.M. on the 31 day of Dec. A.D., 19 81

County Recorder Bulah Hendricks

By MS, Deputy

DOCUMENT NO. 260991

Statement of Evidence:

- 1918 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 5" Poplar S 30-15 E 23 links and 10" W. Oak N 47 W 32 links.
- 1970 USFS technician L. Witthoeft found GLO brass cap monument in place.
- 1980 USFS technician W. Olson found the GLO brass cap monument in place in good condition up 10". Also found was a rotted oak stump that agreed with the 1918 bearing and distance. No evidence of the Poplar was found. Three new bearing trees were marked and are shown on this certificate. A steel sign post was set 4.0' east of the corner. A rough distance check was made east to the $\frac{1}{4}$ corner which agreed well with the 1918 GLO record distance.
- 1981 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1981 On Dec. 22, I visited corner and found items as per 1980 USFS report. Accepted monument as marking same location as when originally set in 1918.

