

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


SOUTHWEST 1/16th Corner of Section 15, Township 141, Range 29, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 6/20/80 found a GLO brass cap monument up 1.5' as set in 1918.  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES

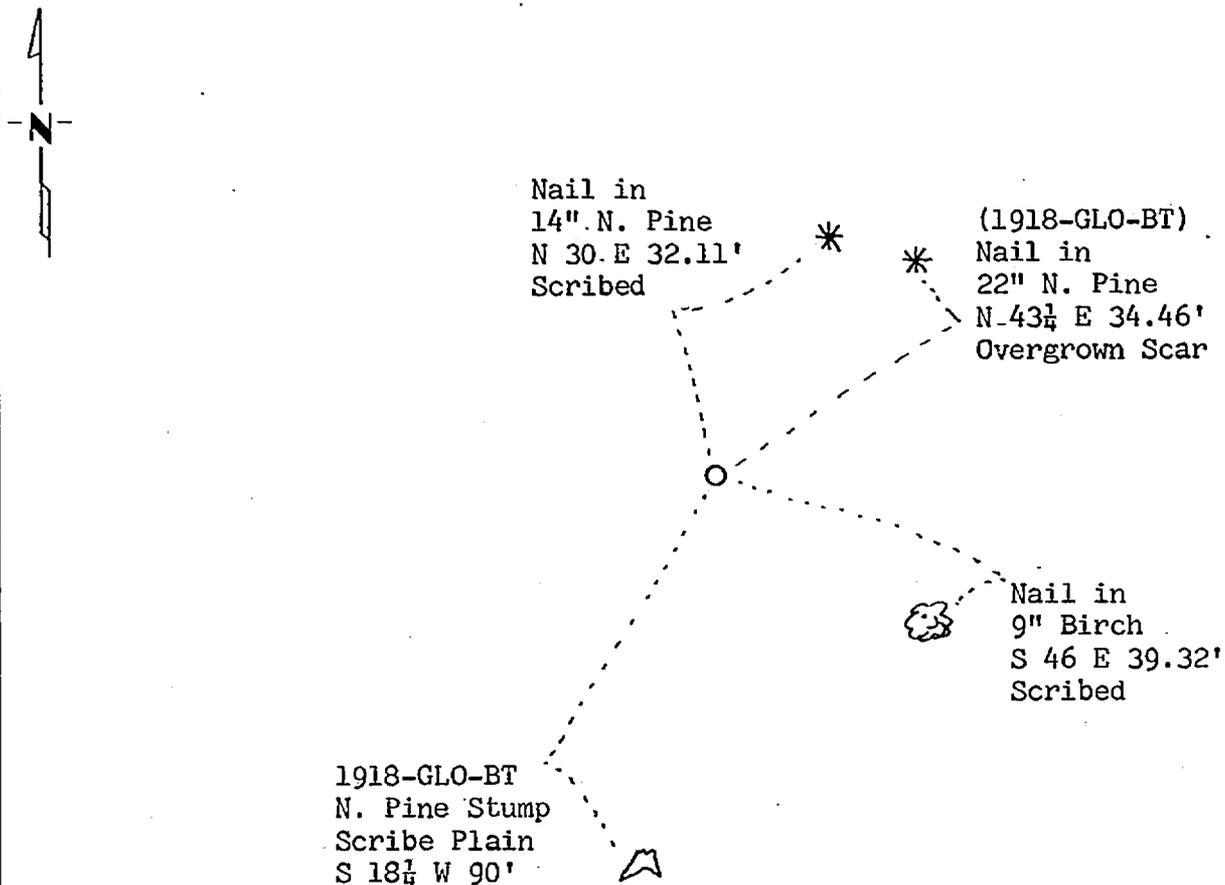

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page 26001

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Doug H. Stevenson 12-15-81  
SIGNATURE DATE

Registration No. 12684

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:39 A.M. on the 31 day of Dec. A.D., 19 81

County Recorder Beulah Handrick

By MS, Deputy

DOCUMENT NO. 261001

Statement of Evidence:

- 1918 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 5" N. Pine N 43-15 E 51 links and 7" N. Pine S 18-15 W 136 links.
- 1980 USFS technician W. Olson found GLO brass cap monument up 1.5' and NE bearing tree. Two new bearing trees were marked and are shown on this certificate.
- 1981 On Dec. 8, I visited corner and found items as per 1980-USFS report. Also found stump of GLO bearing tree to the SW with scribe marks plain which agreed with the in place monument.
- 1981 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.