

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 21, Township 141, Range 29, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9/16/80 found a 2" GLO brass cap monument in place as set in 1918.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

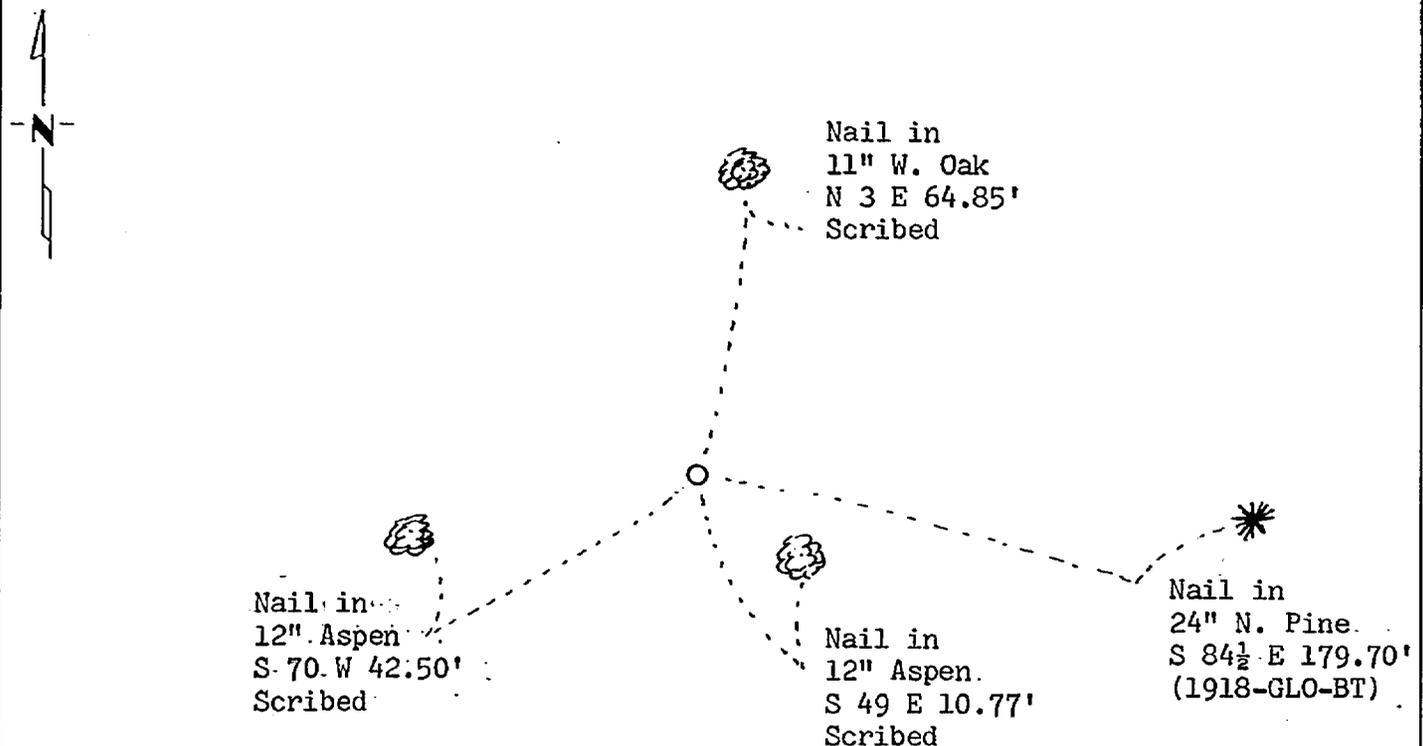

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

261006

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Doug A. Stevenson
SIGNATURE

12-15-81
DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:44 A.M. on the 31 day of Dec. A.D., 1981

County Recorder Buriah Hendricks

By MS, Deputy

DOCUMENT NO. 261006

Statement of Evidence:

- 1873 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: 8" B. Oak N 62 E 62 links, 3" Poplar N 10 W 6 links, 20" Y. Pine S 48 W 67 links, and 12" Y. Pine S 39 E 32 links.
- 1912 County Surveyor's Record Book A pages 500-502 show survey by John Curo. Survey notes show a 4" x 4" x 48" oak stake-set from NE and SW bearing trees. New ties: 3" N. Pine N 29 W 31.80', 2" Poplar N 14-15E 28.65', 5" J. Pine S 32-30E 42.00', and 3" J. Pine S 49-25 W 16.70'.
- 1918 U.S. General Land Office dependent resurvey found the corner marked by a 3" x 3" x 30" marked wooden stake. Stumps of the SE, SW, and NE bearing trees were found. An iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 6" N. Pine S 84-30 E 272 links and 10" N. Pine N 70-30 W 139 links.
- 1980 USFS technician William Olson found the GLO brass cap monument in place. One 1918 GLO bearing tree was found: 24" N. Pine S 84½ E 179.70' with over grown scar. Three new bearing trees were marked and are shown on this certificate. Steel sign posts were set 4.0' south and west.
- 1981 On Dec. 8, I visited corner and found items as per 1980 USFS report. In addition remains of pine stumps were found for the SW and SE 1873 GLO bearing tree calls. The only possible evidence of Curo's 1912 trees found was a J. Pine stump SW.