

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTH SIXTEENTH Corner of Section 31&32, Township 144, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 3/4/81 found a GLO brass cap monument as set in 1930.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

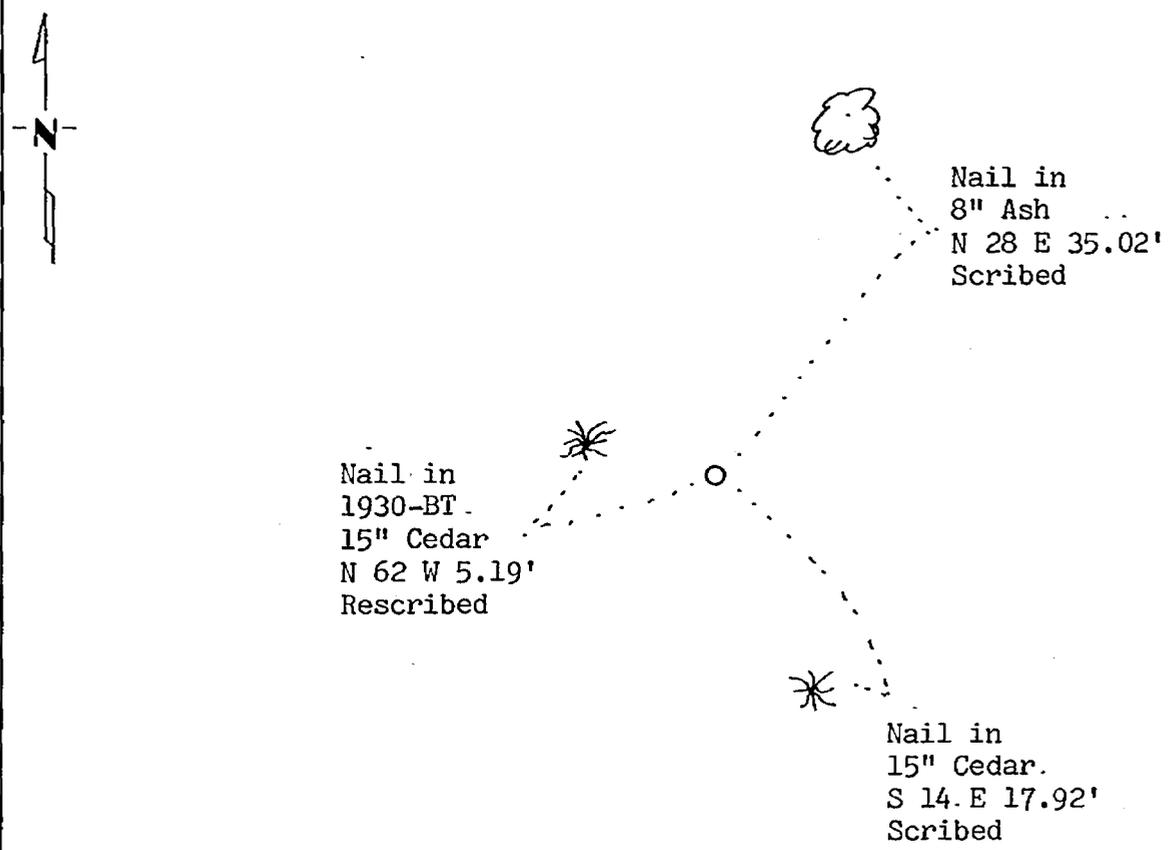

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mary H. Stevenson 9-11-82
SIGNATURE DATE

Registration No. 12604

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

264971
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:31 A.M. on the 14 day of Sept A.D., 1982

County Recorder Bentley Herdiker

By MS, Deputy

DOCUMENT NO. 264971

Statement of Evidence:

- 1930 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 10" Tamarack S 24½ E 10 links and 10" Cedar S 62 3/4 W 7 links.
- 1964 U.S. Forest Service records show the following: J. Ekstrom found the brass cap monument bent over and bearing trees: Decayed Tam. stump S 24 E 6.6' and 12" Cedar N 62 W 4.6' instead of SW.
- 1981 U.S. Forest Service technician G. Brama found GLO brass cap monument bent up 1.5'. Straightened monument and lowered. The following bearing trees were found: Tam. stump (well rotted) S 24 E 6.6' and Cedar N 62 W (instead of SW) 4.6'. Three new bearing trees were marked and are shown on this certificate. Steel sign posts were set 2.85' north and 3.65' south of the corner.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1930 by the GLO resurvey based on bearing tree evidence.