

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northwest Corner of Section 13, Township 144 N., Range 25 W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE _____
- left monument as found, lowered monument, removed monument (explain)
- On 1-23-1985 placed a 5/8" by 13 feet Aluminum Rod with 3" Aluminum Cap
DATE 1-23-1985 stamped as shown up 1.0 foot.

5° EAST Declination

SKETCH OF REFERENCE TIES
NOT TO SCALE

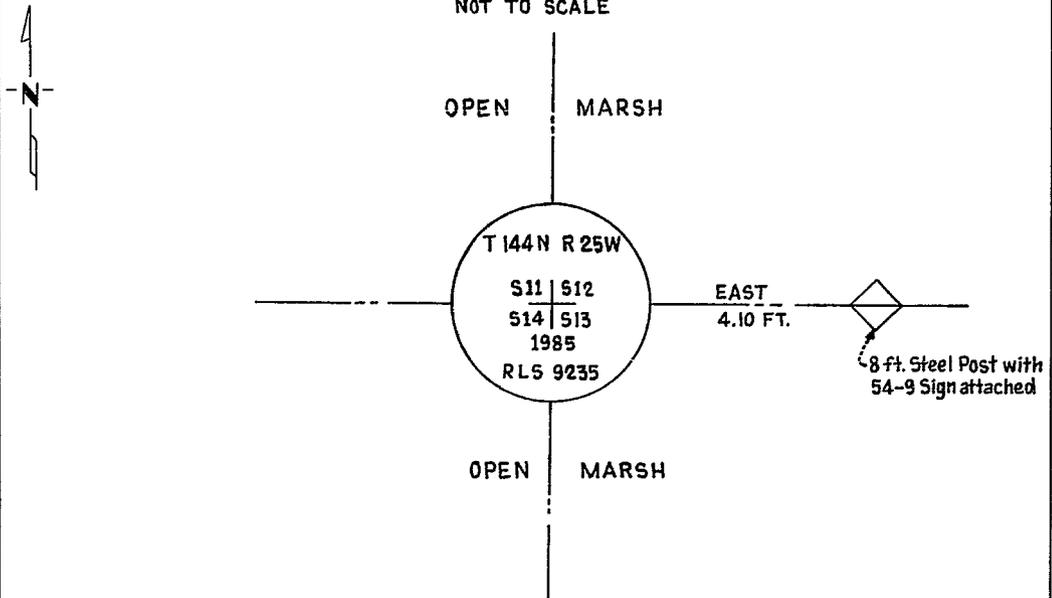

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 3/29/85
SIGNATURE DATE

Registration No. 9235
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

281713
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:45 P .M. on the 3 day of May A.D., 19 85

County Recorder Claudia Kayler
By MS, Deputy

DOCUMENT NO. 281713

Statement of Evidence:

J21

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and no trees for reference.

On August 6, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner but to no avail.

On January 23, 1985, an additional search was made by Advance prior to reestablishing this corner by Double proportionate methods between the Northeast corner of Section 2 and the West Quarter corner of Section 13 and between the Northeast corner of Section 13 and the North Quarter corner of Section 14.