

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


West Quarter Corner of Section 29, Township 142N, Range 25W, 5th P.M.
STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10-3-85 placed a 2" Square Tubular Steel Aluminum Capped
DATE
Monument Stamped

SKETCH OF REFERENCE TIES

Nails in sides of all Bearing Trees

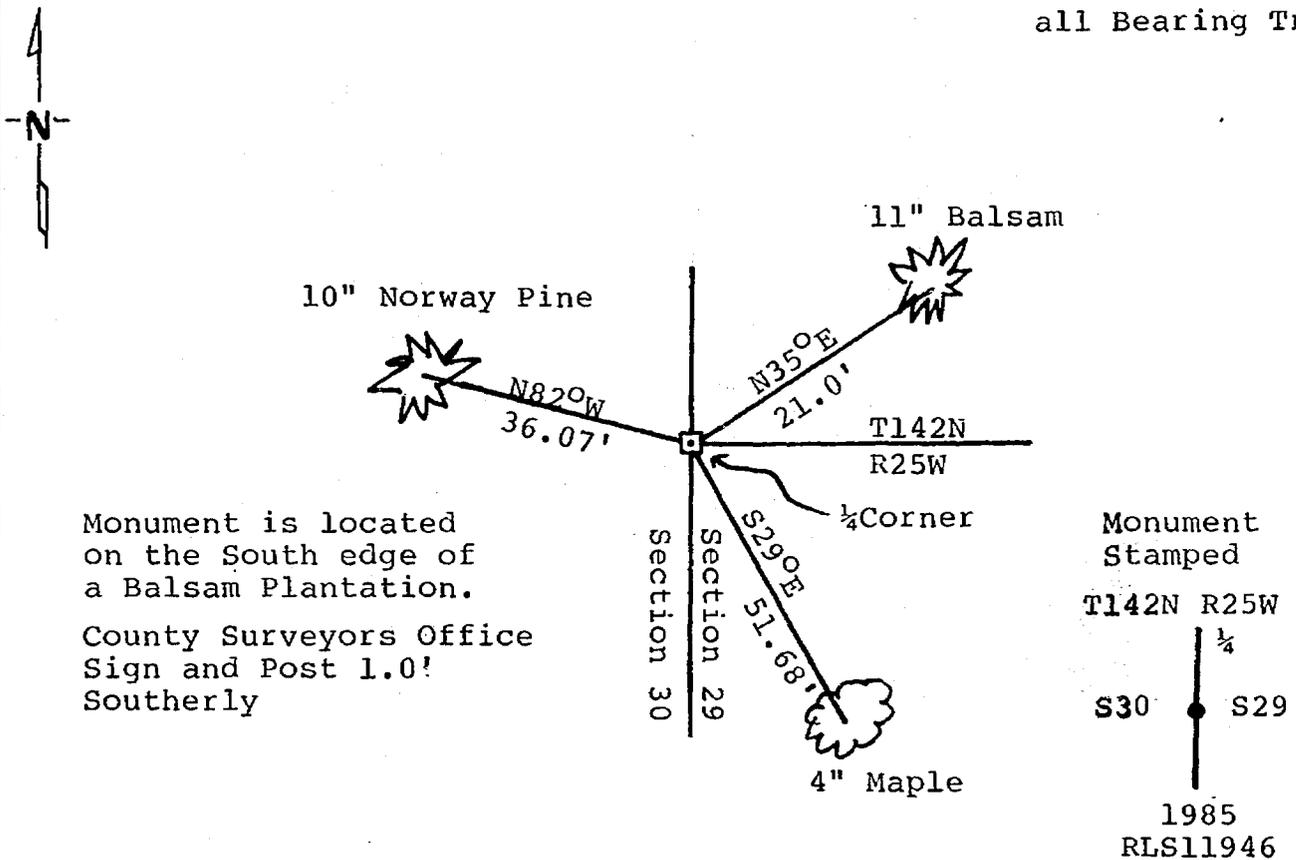

Statement of evidence relative to this corner location is on back of page. 286240

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Roger A. Muellman SIGNATURE 12/2/85 DATE

Registration No. 11946

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:30 P.M. on the 9 day of Dec. A.D., 1985

Register of Deeds Clouline Kaylor

By MS, Deputy

DOCUMENT NO. 286240

STATEMENT OF EVIDENCE: West Quarter Corner of Section 29, Township 142 North,
Range 25 West of the 5th Principal Meridian

- 1871 Walker, Allen & Putman, contract surveyors for the General Land Office set a post from which a Nor Pine 12" brs S2°W 15 lks
a Fir 6" brs North 24 lks
- 1985 Roger A. Mustonen, RLS 11946, under contract with the USFS and a private landowner to survey part of Section 29 FOUND the remnants of a Norway Pine stump (now 24"), At 15 lks N2°E (Magnetic bearing) from the stump found a definite discoloration of the soil, about 4" in diameter down to about 14" below grade.
- On 10/3/85 placed a 2" square tubular County Monument and accepts same as the West Quarter Corner of Section 29.