

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter \_\_\_\_\_ Corner of Section 23, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (Explain)

On 8/14/86 placed a cast iron monument in centerline of N-S rd in line  
DATE  
with fences E & W, down 8"

### SKETCH OF REFERENCE TIES

Not to scale

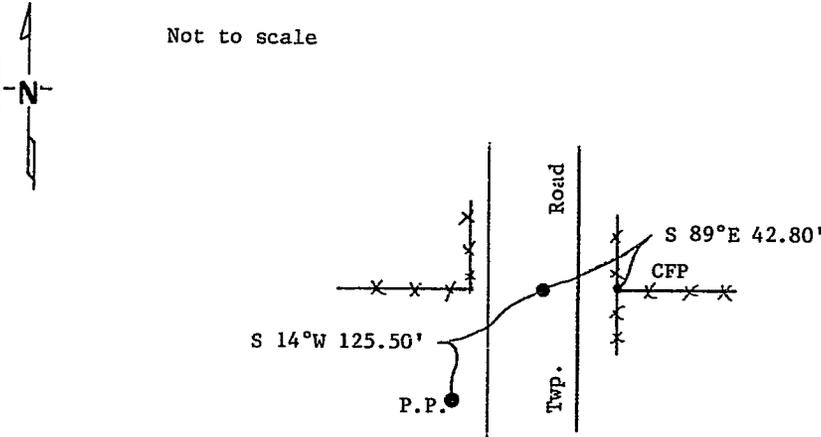

Measurements are to nail in side of object.  
Bearings assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297500

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

W. M. E. [Signature] 1-22-87  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:25 A.M. on the 12 day of June A.D., 19 87

Register of Deeds Clairine Kayle

By ms, Deputy

DOCUMENT NO. 297500

STATEMENT OF EVIDENCE East Quarter Corner Section 23, T.135 N., R.32 W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 6" Aspen N 39°E 39 lks., 12" Aspen N 15°W 25 lks.
- 1985 On Sept. 16, Terry Freeman, Cass County Survey Technician and Ken Meyer, backhoe operator dug in area of N-S rd and fences E-W. Dug 10' N-S x 11' E-W x 4' deep. 6" class V, 1.5' fill and dug 2' into natural sandy gravel. Found nothing.
- 1986 On August 14, Terry Freeman, Jim Cripps and Norman Maunu set a cast iron monument in centerline of N-S rd and fences E-W.