

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 10, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 10-10-1987 found a 2" diameter iron pipe with GLO brass cap  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE


Monument Marked:

T141N	R27W
S3	S2
S10	S11

1919  
GLO

### SKETCH OF REFERENCE TIES

NOT TO SCALE

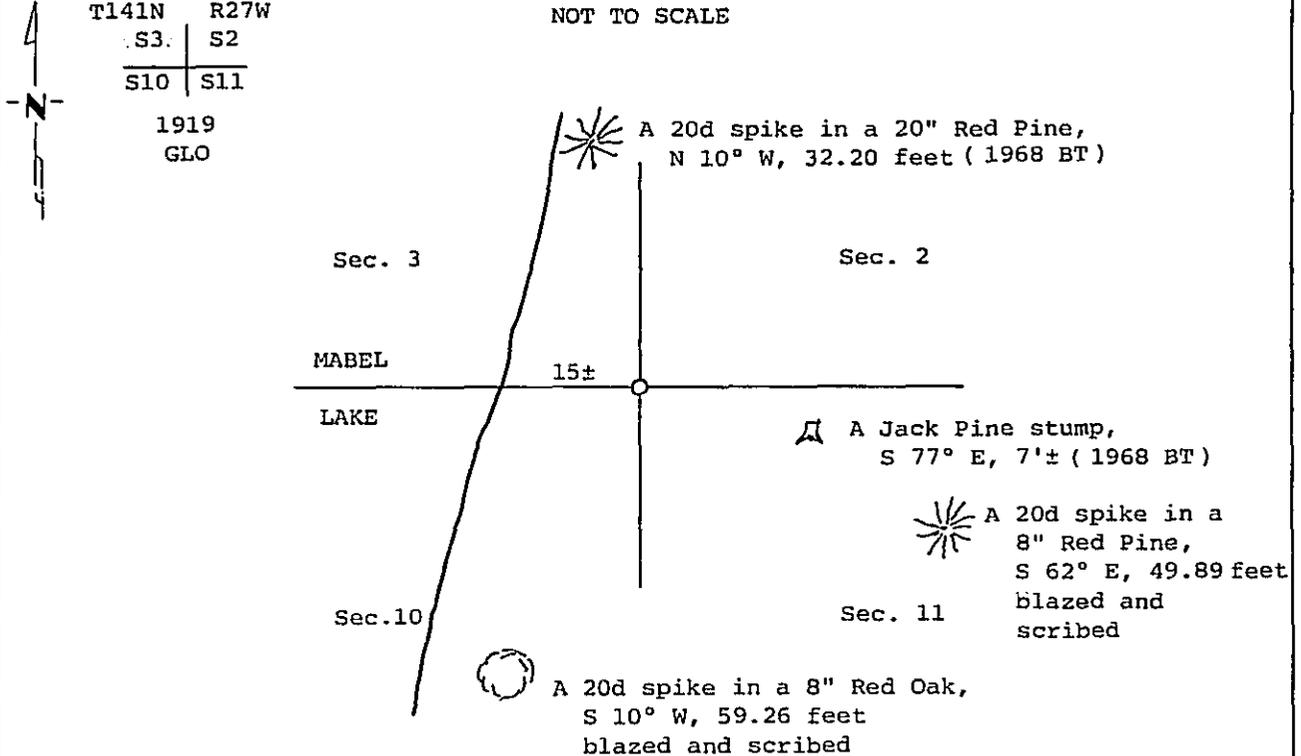

Bearings: Magnetic

All trees are tagged with a USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

302626

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

*Robert L. Kraus*

Date 2-1-88 Registration No. 16459

OFFICE OF THE COUNTY RECORDER  
County of Pleas

I hereby certify that this document was filed in the Co. Recorders office at 4:06 P.M. on the 5 day of February A.D., 1988

County Recorder Clomine Kayler  
By ms Deputy

DOCUMENT NO. 302626

Statement of Evidence:

Northeast corner of Section 10

1-4-1874 P.H. Conger, Deputy Surveyor set post on East side of Lake for corner and witnessed as follows:

Norway 10" South 28 degrees West 59 links (38.94 feet)

Norway 8" North 35 degrees East 50 links (33.00 feet)

Said records are filed with the Secretary of State, St. Paul, MN.

1919 Donald Clement, U.S. Surveyor, in a GLO resurvey found a 16" pine stump with signs of original scribe marks, and set a 3 foot by 2 inch brass capped iron pipe at record bearing and distance, North 28 degrees East, 59 links (38.94 feet) and witnessed as follows:

Jack Pine 6" North 20 degrees East 67 links (44.22 feet)

Jack Pine 8" South 32 degrees East 39 links (25.74 feet)

Jack Pine 10" South 64 degrees West 18 links (11.88 feet)

Jack Pine 10" North 20 degrees West 13 links ( 8.58 feet)

Said records are on file with the Secretary of State, St. Paul, MN.

10-15-1968 W. Okerman, USFS, found a 2" brass capped iron pipe and a Jack Pine windfall 6" North 20 degrees East 67 links (44.2 feet) with bits of scribe marks visible, and rewitnessed as follows:

Red Pine 8" North 44 degrees East 88.7 feet

Red Pine 16" North 10 degrees West 32.2 feet

Jack Pine 8" South 77 degrees East 7.3 feet

2-19-1971 W. Okerman filed an Affidavit as to Location of Government Corner on the 1968 work, in the office of the Cass county Register of Deeds.

10-10-1987 Personnel of Kovanen Surveying found a 2" brass capped iron pipe, 15 feet, more or less, East of the shore of Mabel Lake and a Red Pine 20" North 10 degrees West, 32.2' and a Jack Pine stump and windfall, South 77 degrees East, 7.3 feet.

1-21-1988 Personnel of Kovanen Surveying witness said position as shown on the sketch.

This position is a perpetuation of the 1919 GLO Resurvey.