

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northwest one-sixteenth Corner of Section 28, Township 142 N., Range 28 W., 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 1/7/87 found a brass cap monument and both 1928 GLO Birch B.T.'s
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

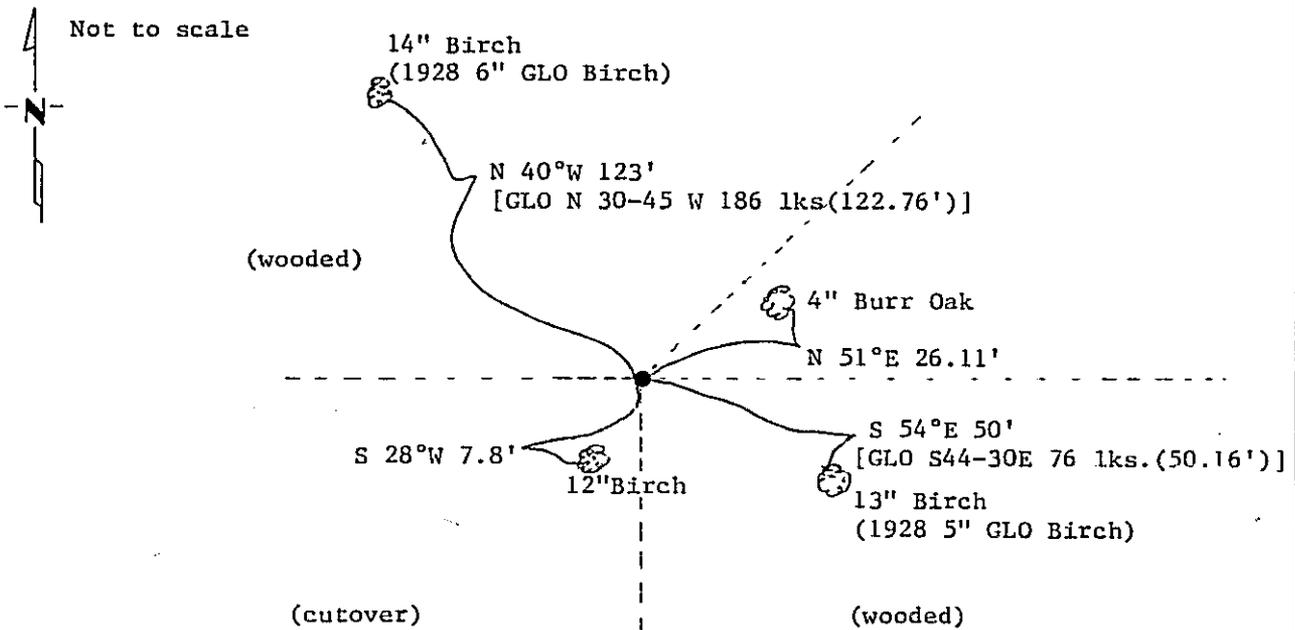

1928 B.T.'s have scar & rotted center.
 Trees have aluminum tags.
 Measurements to nail in side of new trees.
 Bearings assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 309683

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walt E. Olson 1-3-89
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorder's office at 2:45 P.M. on the 3 day of January A.D., 1989

County Recorder Christine Kayla
 By MS, Deputy

DOCUMENT NO. 309683

Statement of Evidence: Northwest one-sixteenth Corner Section 28, T.142 N., R.28 W.,
5th P.M.

- 1928 U.S. General Land Office resurvey set a 1x36" I.P. with stamped brass cap for this corner and marked the following bearing trees: 5" Birch S 44-30 E 76 lks. (50.16'), 6" Birch N 30-45 W 186 lks. (122.76')
- 1987 On January 7, Terry Freeman, Cass County Survey Technician and Dennis Hummitzsch, County Forester, found the 1928 GLO brass cap monument and both birch B.T.'s: now 13" Birch w/scar S. 54°E 50' and 14" Birch w/scar N 40°W 123'. Left monument as found and marked 2 new trees as shown on front of this certificate.