CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

___Northeast___ Corner of Section ___12___ ,Township __133 N.__ , Range __32 W__ , __5th__ P.M.

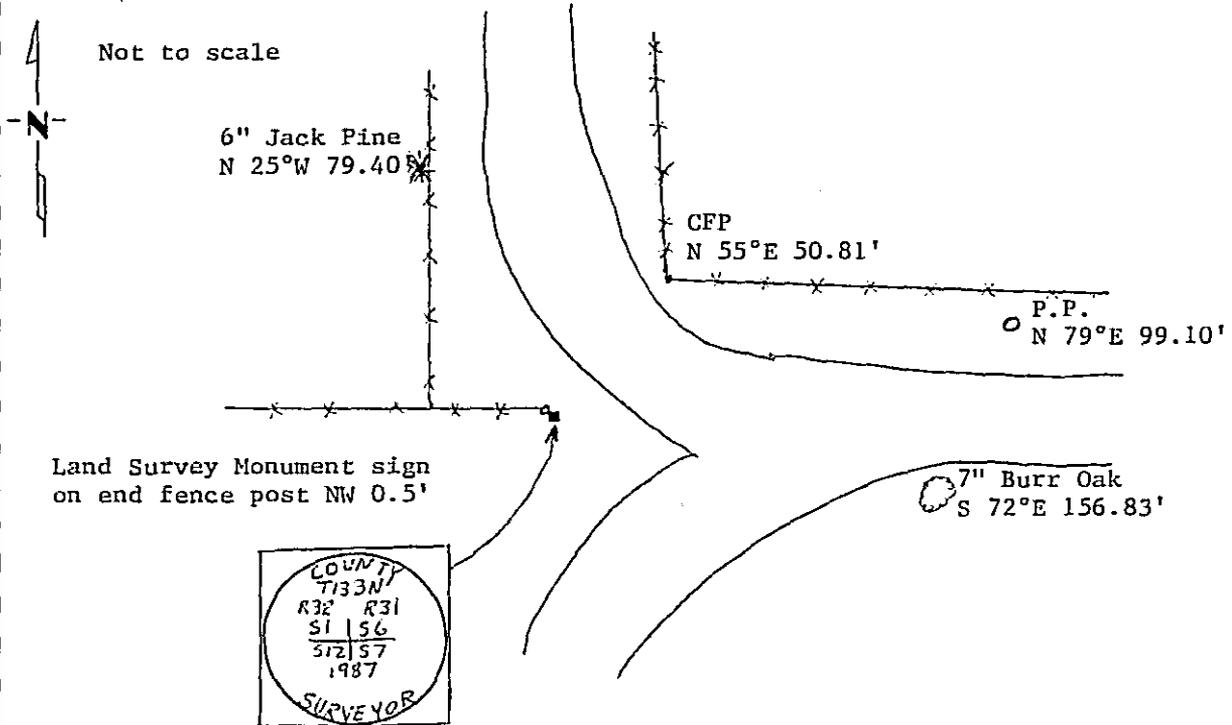STATE OF MINNESOTA, County of ____CASS____

At the corner location shown on the sketch:

☒ On __10/29/85__ found a __½" iron rod on E. End of fence west__
       DATE

          ☐ left monument as found, ☒ lowered monument, ☐ removed monument (explain)

☒ On __10/22/87__ placed a __2" sq. x 36" telespar monument with stamped aluminum__
       DATE
       __cap "COUNTY SURVEYOR"__

SKETCH OF REFERENCE TIES

Not to scale

-N-

6" Jack Pine
N 25°W 79.40

CFP
N 55°E 50.81'

P.P.
N 79°E 99.10'

Land Survey Monument sign
on end fence post NW 0.5'

7" Burr Oak
S 72°E 156.83'

COUNTY
T133N
R32 R31
S1 | S6
S12 | S7
1987
SURVEYOR

Trees double blazed, scribed, painted blaze orange and 54-3 Bearing Tree tag attached.
Measurement taken to nail in side of object.

Statement of evidence relative to this corner location is on back of page. 3 0 9 7 8 4

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.	OFFICE OF THE COUNTY RECORDER
	County of ___Cass___
[signature] 1-9-89	I hereby certify that this document was filed in the Co. Recorders office at 3:20 P..M. on the
SIGNATURE DATE	_9_ day of _January_ A.D., 19 89
Registration No. __11395__	County Recorder _Claudine Kayler_
☒ Land Surveyor	By _M.S_ ,Deputy
☒ County Surveyor	DOCUMENT NO. __309 784__

Statement of Evidence: Northeast Corner Section 12,T.133 N.,R.32 W.,5th P.M.

1858   U.S. General Land Office survey set a wood post for this
                corner and marked the following bearing trees: 11" Pine
                N 75 3/4 E 45 lks.,11" Pine N 4 ½ W 86 lks.,6" Pine S 46 E
                24 lks.,5" Pine S 24 W 42 lks.

1915   County Survey Record Book "B",pages 490-495,show a survey by
                N.D. Gorman. He found the corner.

1977   MN State Highway Dept. notes show I.P. over iron pin.

1985   On Oct. 29, Terry Freeman, Cass County Survey Technician,
                found ½" iron rod at E.end of fence.

1987   In Jan. Comstock & Davis,while surveying township roads in
                the area,tie into corner and find it fits with Hwy Dept. info.

1987   On Oct. 22, Terry Freeman and Norman Maunu drive 2" sq. x 36"
                telespar monument with stamped aluminum cap over the iron rod.
                New ties taken as shown on front of this certificate.