

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander _____ Corner of Section 26, Township 141N, Range 28W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


On 10-19-88 found a 1918 GLO 1" x 36" iron pipe with brass cap.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Monument marked

SKETCH OF REFERENCE TIES
 Not to scale

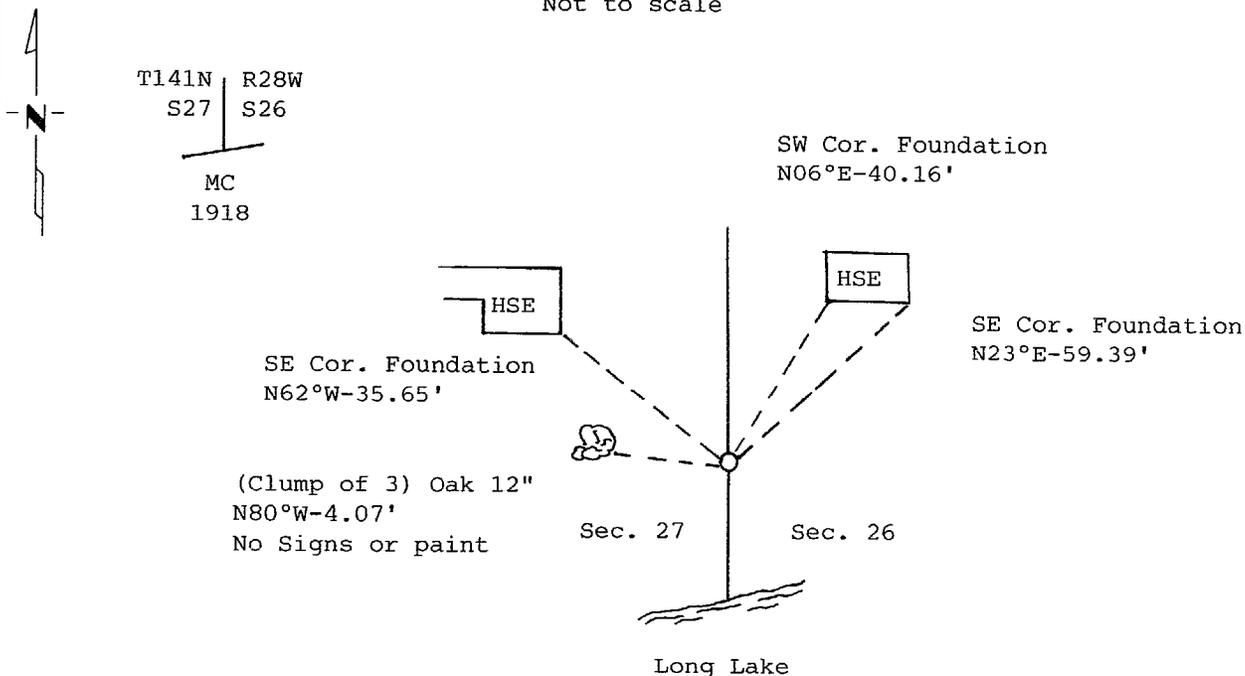

Bearings Magnetic

Statement of evidence relative to this corner location is on back of page. 310946

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Osipow

Date 3/17/89 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:25 A. on the 17 day of March A.D., 1989

County Recorder Clondine K. Ogden

By MS, Deputy

DOCUMENT NO. 310946

Statement of Evidence:

S,T-17 MC Sections 26 & 27 (North Shore)

- 1874 P.H. Conger set post for corner and the following references:
W. Pine 20" bears N 07 degrees E, 38 Links (25.08 feet)
W. Pine 20" bears N 15 degrees W, 42 Links (27.72 feet)
- 1918 Dependent resurvey by GLO, notes state no evidence of original post or bearing trees. Established new MC and the following references:
White Oak 10" bears N 42 degrees E, 312 Links (205.92 feet)
White Oak 8" bears N 18 1/4 degrees W, 133 Links (87.78 feet)
- 1965 John Stark RLS, surveyed Plat of "Likens North Shore Beach". Plat indicates GLO (1918) monument in place. Bearing trees not mentioned.
- 12-13-88 Personnel from Kovanen & Osufsen Surveyors find 1918 GLO corner. Left monument as found and add new witnesses as shown on Certificate.

This position is not a perpetuation of the original GLO corner, but accepted as corner for lack of further evidence.