


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 10, Township 139 N., Range 26 W., 5th P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 4/19/88 found a the remains of two bearing tree stumps.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4/19/88 placed a 1 1/4" X 1 1/4" X 20" perforated steel tube
DATE with an aluminum cap, stamped "DNR SURVEY MARKER", up 0.5'.

SKETCH OF REFERENCE TIES

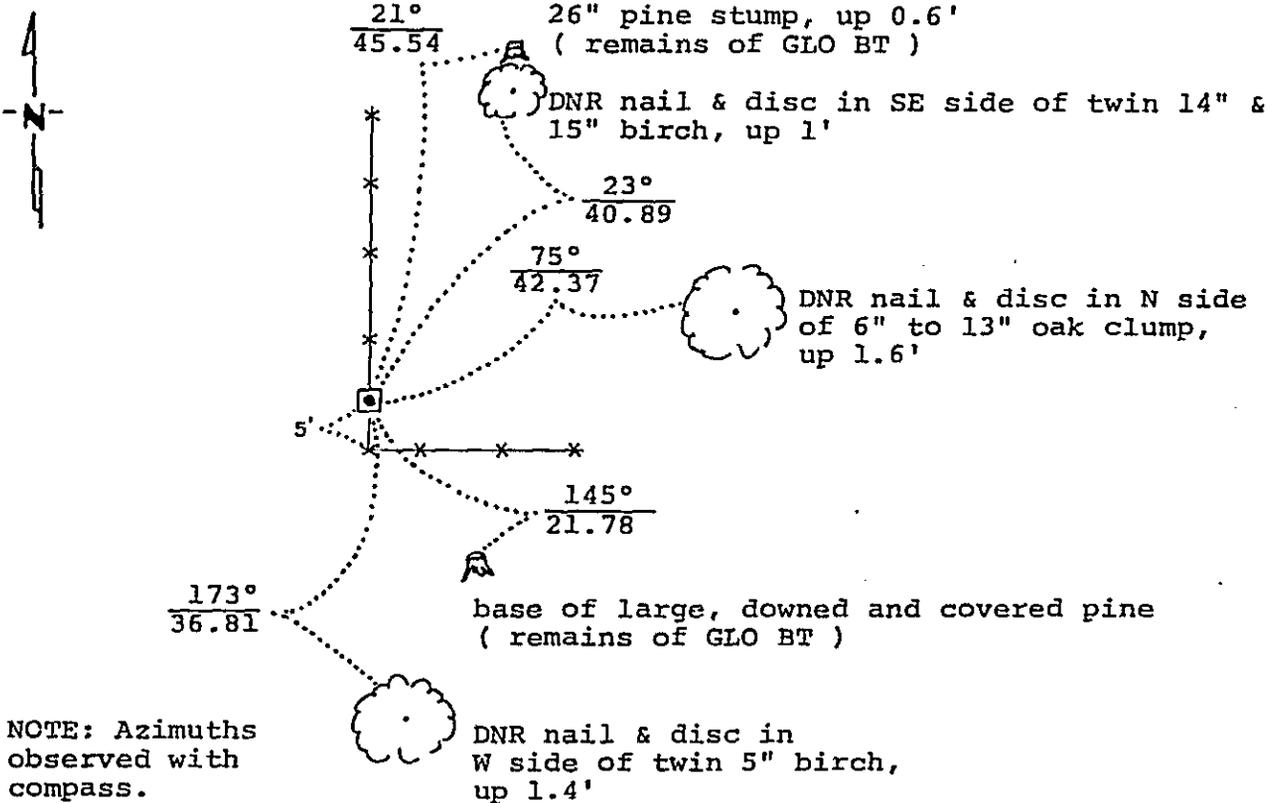

NOTE: Azimuths observed with compass.

Statement of evidence relative to this corner location is on back of page. D.A.E. 6/16/88
 File: F-761

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 3-14-89
SIGNATURE DATE

Registration No. 16098

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:10 P. M. on the 22 day of May A.D. 1988

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 312282

North Quarter Corner of Section 10, Township 139 North, Range 26 West

The following offices were contacted for information concerning this corner:

MN Secretary of State
Cass County Surveyor
Mn/DNR Washburn Forestry Station

- 1863 This corner was established by the U.S. General Land Office, marked with a wood post and witnessed by:
18" White Pine, N. 15° E., 45.54 feet (69 links)
26" White Pine, S. 29° E., 21.78 feet (33 links)
- 1937 Cass County Land Corner Record notes a survey by C.C.C., recorded in Book #3, page 62. Records indicate that the corner is marked with an iron pipe, south of a fence corner.
- 1988 The DNR Bureau of Engineering searched for any evidence of the corner. A 26" pine stump was located and the base of a large, downed and covered pine was found. The remains of these trees were identified as the two original bearing trees.

The corner was re-established using the recorded B.T. distances. This point falls on an old north-south fence, 5 feet north of an old downed fence east. 1060 feet, more or less, was measured to the edge of a swamp east with a creek another 30 feet which would compare with the GLO call of 1098.24 feet to the center of the creek.

A DNR Survey Marker was set to perpetuate the corner.