

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 23, Township 135N., Range 30W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


On 9/22/87 found a 3" square concrete monument with a 3" metal disc on top, up 18"

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

NOT TO SCALE

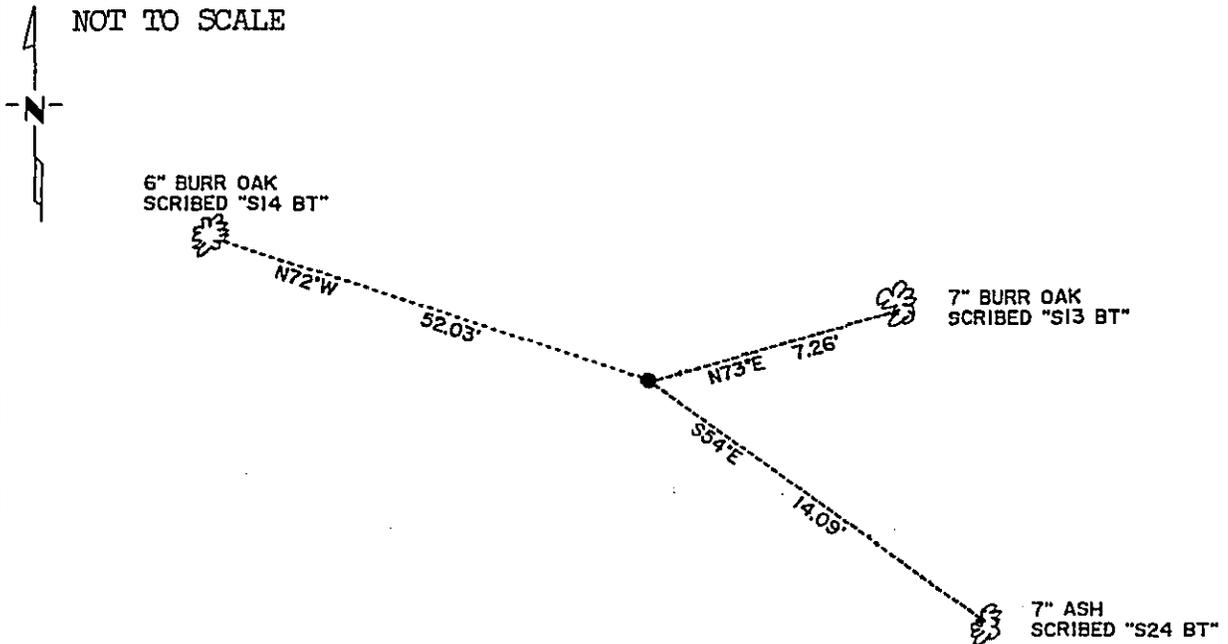

Trees double blazed, scribed, painted blaze orange and 54-3 Bearing Tree tag attached. Measurement taken to nail on side of tree.

Statement of evidence relative to this corner location is on back of page. 317850

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Brown 1-12-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:50 P.M. on the 12 day of January A.D., 19 90

County Recorder Claudia Kayler

By ms, Deputy

DOCUMENT NO. 317850

Northeast Corner Section 23, T.135N., R.30W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 18" Aspen S42W 19 lks., 22" Aspen N17W 42 lks., 3" Aspen N2E 4 lks., 14" Aspen S31E 45 lks.
- 1987 On September 22, Terry Freeman, County Survey Technician and Dan Marcum, County Forrester found a 3" square cement post with a 3" metal disc on top, up 18". Marked new B.T.'s: 7" Ash S54E 14.09' scribed "S24 BT"; 7" Burr Oak N73E 7.26' scribed "S13 BT", 6" Burr Oak N72W 52.03' scribed "S14 BT".