

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 1, Township 143N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


On 7-25-1989 found a 24" rod with copper cap.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE


Monument Marked

SKETCH OF REFERENCE TIES
not to scale



SEC. 1

■ Aluminum Post
N24°W 55.83
(1976)

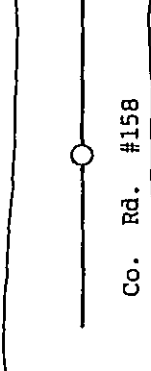

■ Aluminum Post
N44°E 61.78
(1976)

* 7" Balsam
N67°E 48.27

SEC. 6

bearings are true All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 319608

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Chaffin

Date 3/20/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:30 A.M. on the 12 day of April A.D., 19 90

County Recorder Claudine Kayler

By M.S., Deputy

DOCUMENT NO. 319608

Statement of Evidence:

C25 East quarter corner of section 1

1/4 Cor. 1 and 6 (E 1/4 Cor. Sec. 1)

1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
White Pine 10" S 28 degrees E, 18 Links (11.88 feet)
White Pine 14" N 52 degrees W, 4 Links (2.64 feet)

11-8-1965 James Ekstrom, USFS, found no evidence.

1976 BLM dependent resurvey, found no original evidence, at proportionate distance they set a copperweld, with copper cap, 6" below surface of FS road #126 and witnessed as follows:
Aluminum Post 2.5"x 28" N 44 degrees E, 61.8 feet
Aluminum Post 2.5"x 28" N 24 degrees W, 55.8 feet

1979 Olsen, USFS, found 1976 BLM monument.

7-25-1989 Personnel from Kovanen & Osufsen Inc. found 1976 BLM monument in good condition and the following witnesses:
Aluminum Post 2.5"x 28" N 44 degrees E, 61.78 feet
Aluminum Post 2.5"x 28" N 24 degrees W, 55.83 feet
we add the following witness:
Balsam 7" N 67 degrees E, 48.27 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.