

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 35, Township 140, Range 27, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 4/2/91 found a 1½" iron pipe up 36", pound down to 19"  
above <sup>DATE</sup> ground.
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
Not to Scale

All distances are horizontal to nail in side of tree

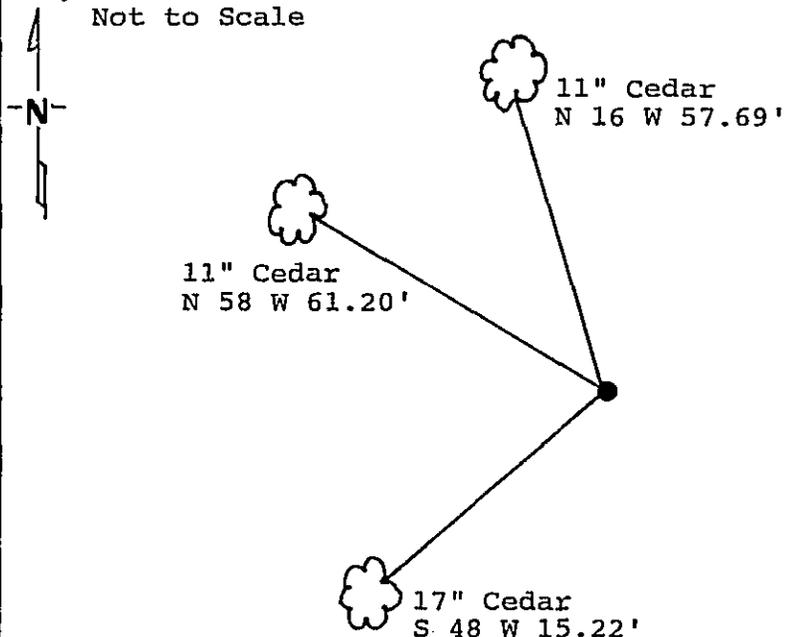

Monument is located 19" above ground at end of old fences easterly and southerly in Cedar & Balsam swamp 900'± westerly of edge of hay field.

8' steel sign post with Land Survey Monument sign 2.2 feet South.

Statement of evidence relative to this corner location is on back of page. 329 227

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision)

William A. Laska 6/10/91  
SIGNATURE DATE

Registration No. 17008

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 4:20 P. .M. on the 11 day of June A.D., 19 91

Register of Deeds Chloé Kayler

By MS, Deputy

DOCUMENT NO. 329 227

North Quarter corner, Section 35, Township 140 North,  
Range 27 West, Cass County, Minnesota

V - 19

1873 Fendall G. Winston, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 140 North, Range 27 West. The notes indicate a wood post was set and the following bearing trees were marked: a 12 inch Cedar North 62 degrees East a distance of 12 links; and a 12 inch Cedar South 63 degrees West a distance of 19 links.

1938 Civilian Conservation Corps notes from Washburn Lake, Book 9, page 4 show they found a 1 inch iron pipe and a 4 inch Tamarack post at 2631 feet from east.

1990 Minnesota Department of Natural Resources, Bureau of Engineering, supplied Landecker & Associates of Walker, Inc. with a subdivision map prepared by Melchert/Block Associates, Inc., which indicates that Melchert/Block Associates, Inc. found monument or evidence of corner.

1991 on April 2, a Landecker & Associates of Walker, Inc. survey crew found a 1 and 1/4 inch iron pipe up 36 inches. Said corner was determined to be the same monument as noted in the 1938 Civilian Conservation Corps notes. On May 2, a Landecker & Associates of Walker, Inc. survey crew measure new bearing trees as shown and set a steel sign post as noted on front of this certificate.

NOTE: See subdivision map on Sheet 2 of 2 of STEVENS LAKE  
HOMESITES plat of record.