

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


WEST QUARTER Corner of Section 32, Township 136, Range 29, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 2 22 91 placed a CAPPED 1/2" IRON PIPE 2" BELOW ROAD SURFACE,  
DATE MARKED BY REGISTRATION NO. 17008. ±9' EAST OF CENTERLINE.

### SKETCH OF REFERENCE TIES

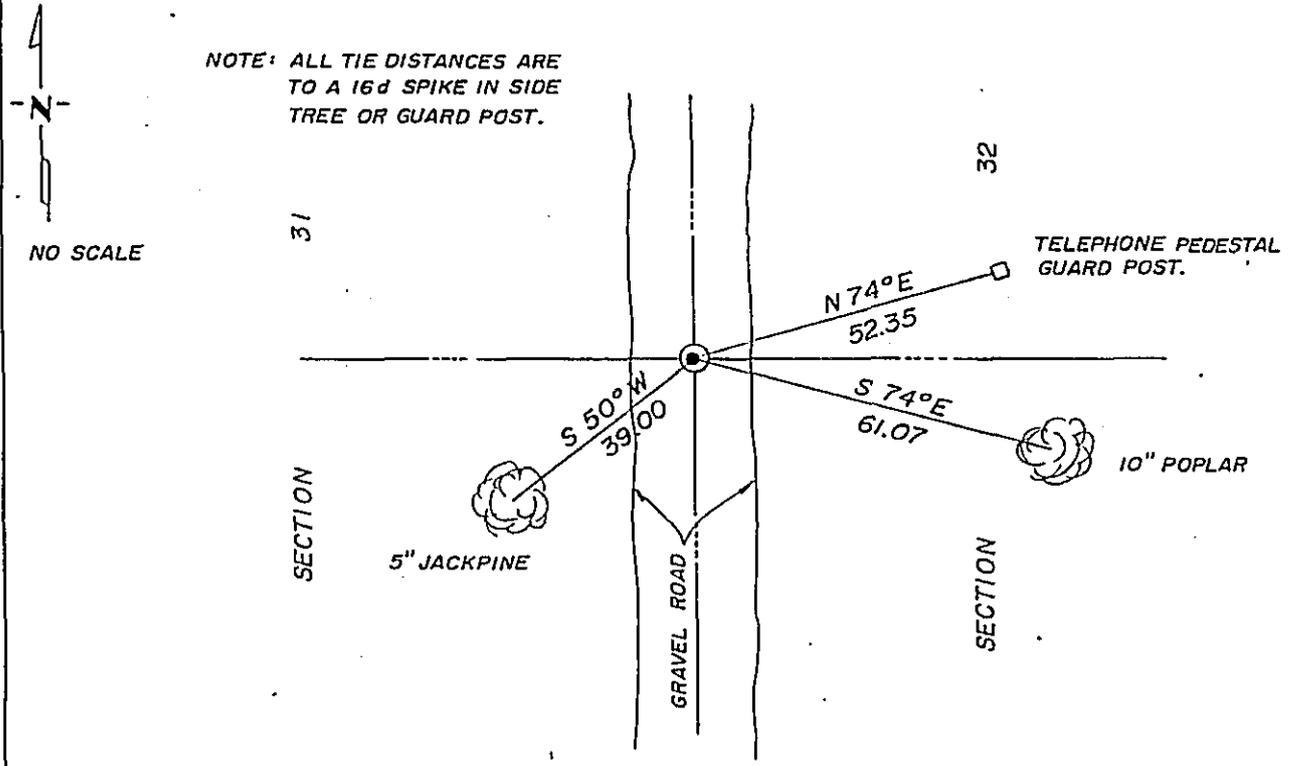

Statement of evidence relative to this corner location is on back of page. 336119

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David A. [Signature]  
Date 3/14/91 Registration No. 17008

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:30 P.M. on the 24 day of March A.D., 1992

County Recorder Clarence K. [Signature]  
By ms Deputy  
DOCUMENT NO. 336119

Statement of Evidence:

West Quarter Corner

In 1870 the United States of America Government Land Office surveyed, established and set a post at the quarter corner position.

In February, 1909 County Surveyor, John Curo, found original corner to be lost and set a temporary stake at the quarter corner position.

In January, 1991 Landecker & Associates, Inc. field crew does not find any evidence of the quarter corner position from the 1890 and 1909 surveys. On February 22, 1991 Landecker & Associates, Inc. field crew set a 1/2 inch capped iron to establish quarter corner position by lost method on line and a split between the northwest corner and southwest corner of Section 32.