


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 18, Township 145, Range 31, 5th P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 2/18/94 found a 1/2" Iron Pipe with plastic cap marked R.L.S. 15483
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3/11/94 placed a 2" X 30" Square tube with MN/DOI Cast Iron Cap.
DATE
Top of monument 0.3 feet above ground.

SKETCH OF REFERENCE TIES

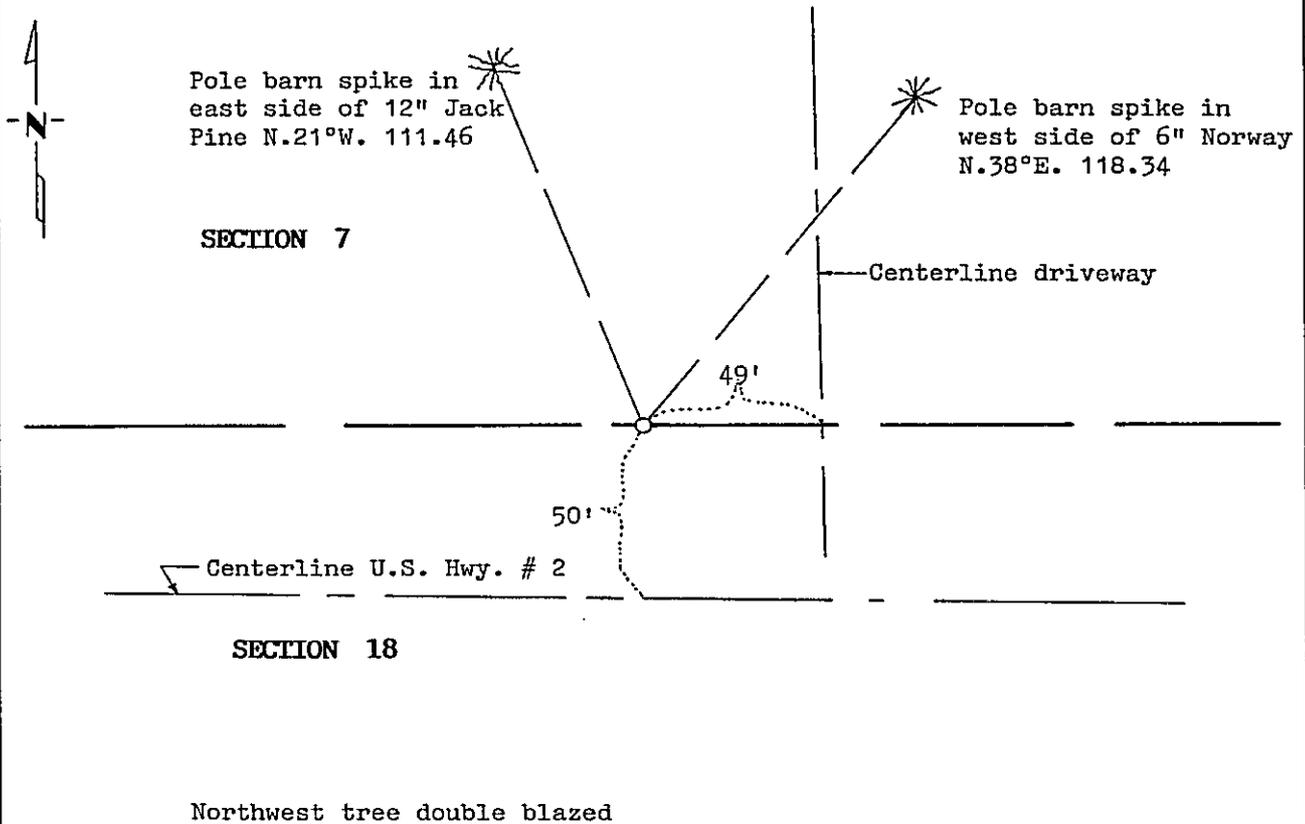

Statement of evidence relative to this corner location is on back of page. 357117

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Robert W. Murray
 Date 3-28-94 Registration No. 15483

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 1:00 P.M. on the 26th day of APRIL A.D., 1994

County Recorder Claudine Kayler
 By N.B. MICROFILM, Deputy
 DOCUMENT NO. 357117

Statement of Evidence:

**NORTH QUARTER CORNER SECTION 18, TOWNSHIP 145 NORTH,
RANGE 31 WEST, FIFTH PRINCIPAL MERIDIAN**

1875 The original Public Land survey was run by Benjamin C. Baldwin. A scribed post was set to mark corner and witness ties were recorded:

10" Jack Pine N. 6° E. 140 links

12" Tamarack S. 8° W. 159 links

1912 John Curo found the two government bearing trees and made additional witness ties as follows: (Survey Record Book D, page 148)

Tack in old BT N. 6° E. 89.60 feet

Tack in old BT S. 8° W. 101.60 feet

10" Jack Pine N. 74°07' E. 144.80 feet

1963 Jack Salo, RLS, found no evidence of corner and established corner as lost.

1993 Murray Surveying, Inc., found no evidence of corner and established corner as lost, proportionate distance and on line between the northwest and northeast corners of Section 18.

For information regarding this survey, contact Murray Surveying, Inc., Bemidji, MN.