

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 3, Township 141N, Range 26W, 5th P.M.
 STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On 2/9/95 found a 6" Dia. concrete cylinder w/a 3" bronze tablet
DATE stamped to identify the corner-9" below ground
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

MAGNETIC: 2°E DECL.

SKETCH OF REFERENCE TIES
NOT TO SCALE

BRASS CAP MARKING:

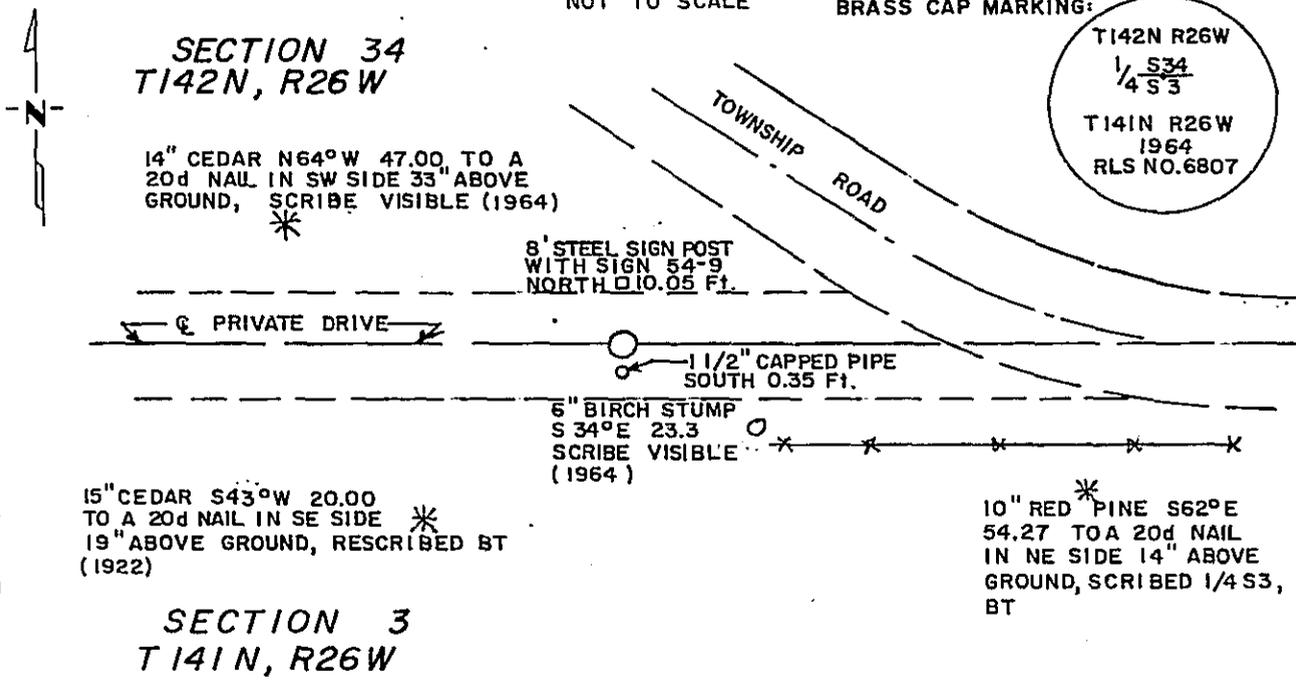

ALL BEARINGS ARE TRUE
 ALL DISTANCES HORIZ. AND TEMP. CORRECTED
 ALL TREES MARKED WITH A 54-3 (BEARING TREE) TAG.

Statement of evidence relative to this corner location is on back of page.

365506

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Lowell J. Schellack

Date 3/21/95 Registration No. 15572

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 2:50 P.M. on the 21st day of MARCH A.D., 19 95

County Recorder Claudine Kaylar

By N.B., Deputy

DOCUMENT NO. 365506

Statement of Evidence: NORTH QUARTER CORNER OF SECTION 3, TOWNSHIP 141 NORTH,
RANGE 26 WEST OF THE 5th PRINCIPAL MERIDIAN

The original public land survey was run in 1871 by Walker, Allen and Putnam. A post was set to mark the corner and two bearing trees were marked and recorded as accessories; An 8" spruce that bears S88°E-10 links(6.60 ft.); and an 8" spruce that bears N2°E-12 links(7.92 ft.). The notes of this survey are on file in the office of the Secretary of State, St. Paul, MN.

In 1922 James Flynn, Cass County Surveyor, was at the corner. He found an old government bearing tree, although he doesn't state which one. He also found an iron monument in place. He proceeded to mark and record a bearing tree as an accessory; A 9" cedar that bears S43°W-19.7 ft. Cass County Survey Book D, page 51, Cass County Courthouse, Walker, MN.

In 1964 William H. Okerman, RLS, was at the corner. He found the remains of the survey by Cass County Surveyor Flynn in 1922. An iron pipe was found in place as well as Flynn's 9" cedar that bears S43°W-19.7 ft. (Now a 14" cedar S44°W-20.0 ft. and scribe visible). Okerman proceeded to set a 6" dia.x24" long cylindrical concrete monument set 4" below the surface of the road with a bronze tablet stamped to identify the corner. Two bearing trees were marked and recorded as accessories; A 6" birch that bears S34°E-23.3 ft.; and an 11" cedar that bears N64°W-47.0 ft. Affidavit as to Location of Government Corner #305 filed at the Cass County Recorder's Office, Cass County Courthouse, Walker, MN.

On February 9, 1995 Tom Miller, RLS, and Jon Larson of Schellack Engineering and Land Surveying, USFS Contract, 1994-95, were at the corner. They found the 6" dia. concrete cylinder with a 3" bronze tablet stamped to identify the corner 9" below ground. They found the two bearing trees-marked by Okerman and also the bearing tree marked by Flynn.

For additional information, contact the Cass County Surveyor's Office in Walker, MN.