

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 15 ,Township 135 N ,Range 31 W , 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 7/13/94 Placed a 3/4" x 24" IRON ROD WITH ALUMINUM CAP STAMPED: "DNR SURVEY MARKER"  
DATE (UP 0.2') AND 6' SW OF WATER'S EDGE ON HIGH GROUND PROTRUDING INTO A SWAMP.

### SKETCH OF REFERENCE TIES

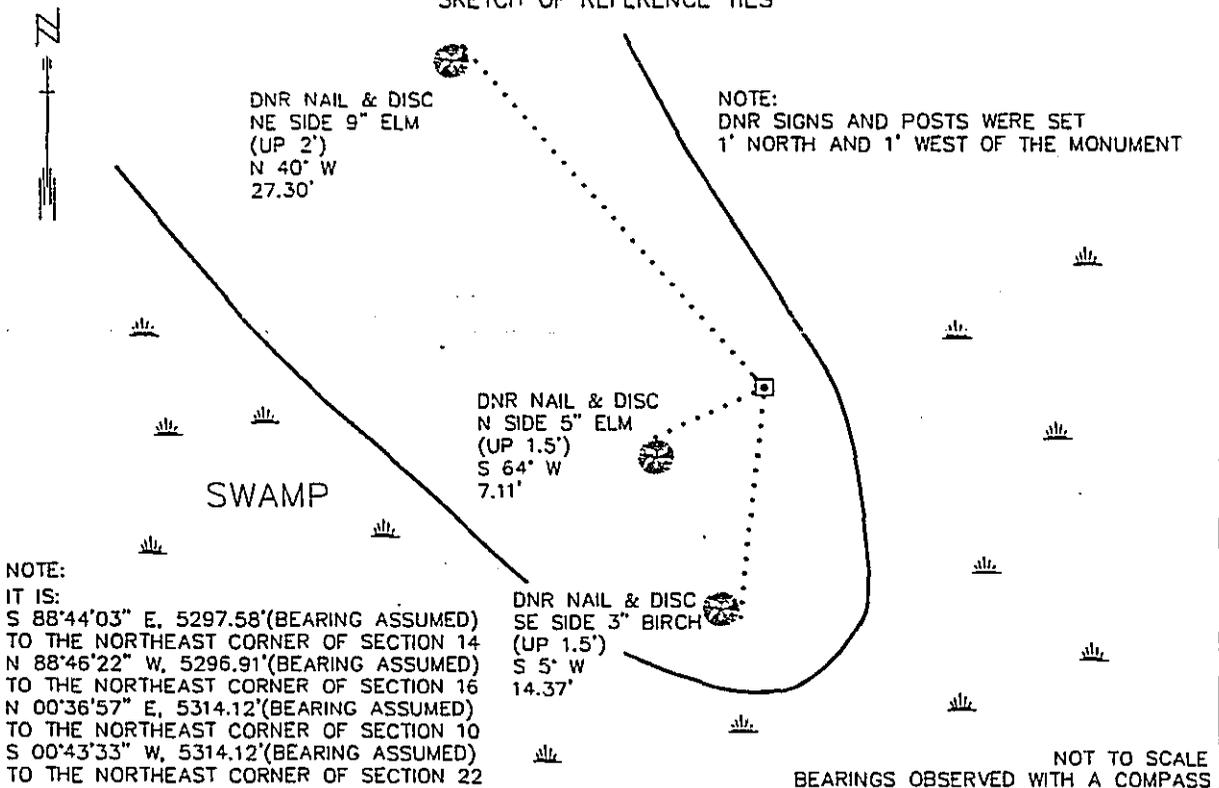

Statement of evidence relative to this corner location is on back of page.

DATE 10/12/94  
FILE WMA01198

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 3-27-95  
SIGNATURE DATE

Registration No. 16098

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of CASS

I hereby certify that this document was filed in the Co. recorders office at 10:00 A .M. on the 4th day of APRIL A.D., 1995

County Recorder Claudine Kaylar  
By N.B. ,Deputy

DOCUMENT NO. 365901

**Northeast Corner Section 15, Township 135 North, Range 31 West, 5th P.M.**

The Department of Natural Resources, Bureau of Engineering (BOE) made the following contacts for information concerning this corner:

Minnesota Secretary of States Office  
 Cass County Surveyors Office  
 Cass County Highway Department  
 Landecker and Associates  
 Donald Coulter

1870 The U.S. General Land Office set a post to mark this corner and the following bearing trees were marked:

Br. Oak 18"	N 79°30'E	18 links (11.88')
Elm 12"	S 74°30'E	37 links (24.42')
Blk. Ash 6"	N 26° W	17 links (11.22')
Tamarac 6"	S 20° W	45 links (29.70')

1970's Donald Coulter made surveys for the plats of Wilderness Park Estates and Wilderness Park Estates 1st, 2nd, 3rd and 4th Additions. He went around the outside of sections 10, 11, 12, 13, 14 and 15. He established or found the corners along the north line of sections 10, 11, 12 and the south line of sections 13, 14, 15 and the northwest corner section 15 and the northeast corner of section 13. The section corners inside of this big loop were computed by double proportion and the quarter corners computed lost.

1979 Myron Landecker surveyed the plat of Wilderness Park Estates Seventh Addition. The description for the plat is based on corners in the plat of Wilderness Park Estates. The northeast corner of section 14 and the south and west lines of section 11 are shown only as approximate locations.

1993 The BOE searched for this corner. Nothing was found in this area and it fell in an unplatted area. Coulter's computations for corners were reviewed and it looks like the northeast corner of section 14 wasn't double proportioned using GLO distances, but computed at one third of the distance from the northeast corner of section 13 to the northeast corner of section 16. Using Coulter's location for the northeast corner of section 13, southeast corner of section 14, northeast corner of section 11 and the northeast corner of section 16, a double proportion position using the GLO distances was computed for the northeast corner of section 14. This point fell 0.3' south and 27.3' west of Coulter's position. Then a position was computed at a double proportion with GLO distances for this corner using the computed northeast corner of section 14, southeast corner of section 15, northeast corner of section 10 and the northeast corner of section 16.

A DNR Survey Marker was set to mark the double proportioned position and was tied out as shown on the face of this certificate.

For information regarding this survey, contact the MN Department of Natural Resources, Bureau of Engineering, Survey Section, 500 Lafayette Road, St. Paul, MN 55155-4029.