

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 2, Township 134, Range 31, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

On 4-16-96 found a 2" CAPPED IRON PIPE (UP 1.5') IN SWAMP  
DATE


left monument as found,  lowered monument,  removed monument (explain)

On                      Placed a                       
DATE

### SKETCH OF REFERENCE TIES



**NOTE:**  
MONUMENT IS:  
1' SOUTH OF SURVEY MARKER SIGN  
1' EAST OF WILDLIFE MANAGEMENT SIGN  
NO OTHER TIES AVAILABLE

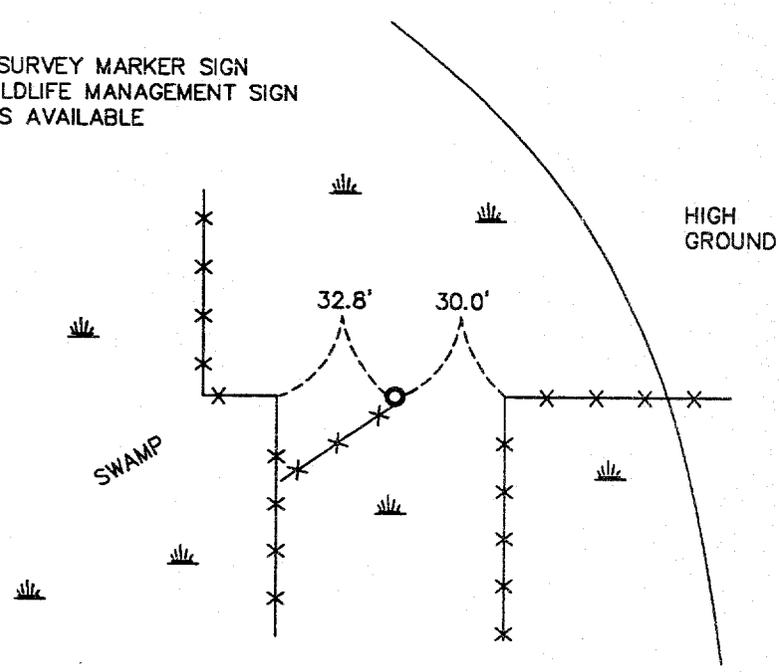

NAD 1983  
CASS COUNTY  
COORDINATES  
N 209397.37  
E 481538.86

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

MAY 1996  
SFT99999

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 3-3-97  
SIGNATURE DATE

License Number 116098

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. recorders office at 1:15 P.M. on the 14th day of January A.D., 1999

County Recorder Claudine Kaylor

By K.F., Deputy

DOCUMENT NO. 408850

408850

**Northeast Corner Section 2, Township 134 North, Range 31 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
Cass County Surveyor  
Widseth, Smith and Nolting of Brainerd  
Landecker and Associates of Pequot Lakes

1858 The U.S. General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees are marked:

Tamarack 6 " S 71° W 47 links (31.02')  
Tamarack 5" N 42° W 89 links (58.74')  
Tamarack 5" N 28° E 44 links (29.04')  
Tamarack 8" S 75° E 90 links (59.40')

1915 N.A.Gorman found this corner and set an iron monument. This is recorded on the county land corner record.

1985 Terry Freeman found a 2" capped iron pipe up 2' in the swamp. He set a survey marker sign 1' north of the monument. This is recorded on the county land corner record.

1996 The DNR survey crew found a 2" capped iron pipe up 1.5' in a swamp. The cap is stamped with the four section numbers of the adjacent sections. A survey marker sign is 1' north and a DNR wildlife sign is 1' east of the monument.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 500 Lafayette Road, St. Paul, MN 55155-4029.