

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 21, Township 134 N, Range 31 W, 5TH P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

On 3-19-98 found 5 tie Trees from Coulter Survey  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 3-19-98 Placed a DEPT MONUMENT IN WOODS W/RIBSTICK 96' S OF  
DATE E-W FENCE. SET FROM FOUND 1971 TIE TREES.

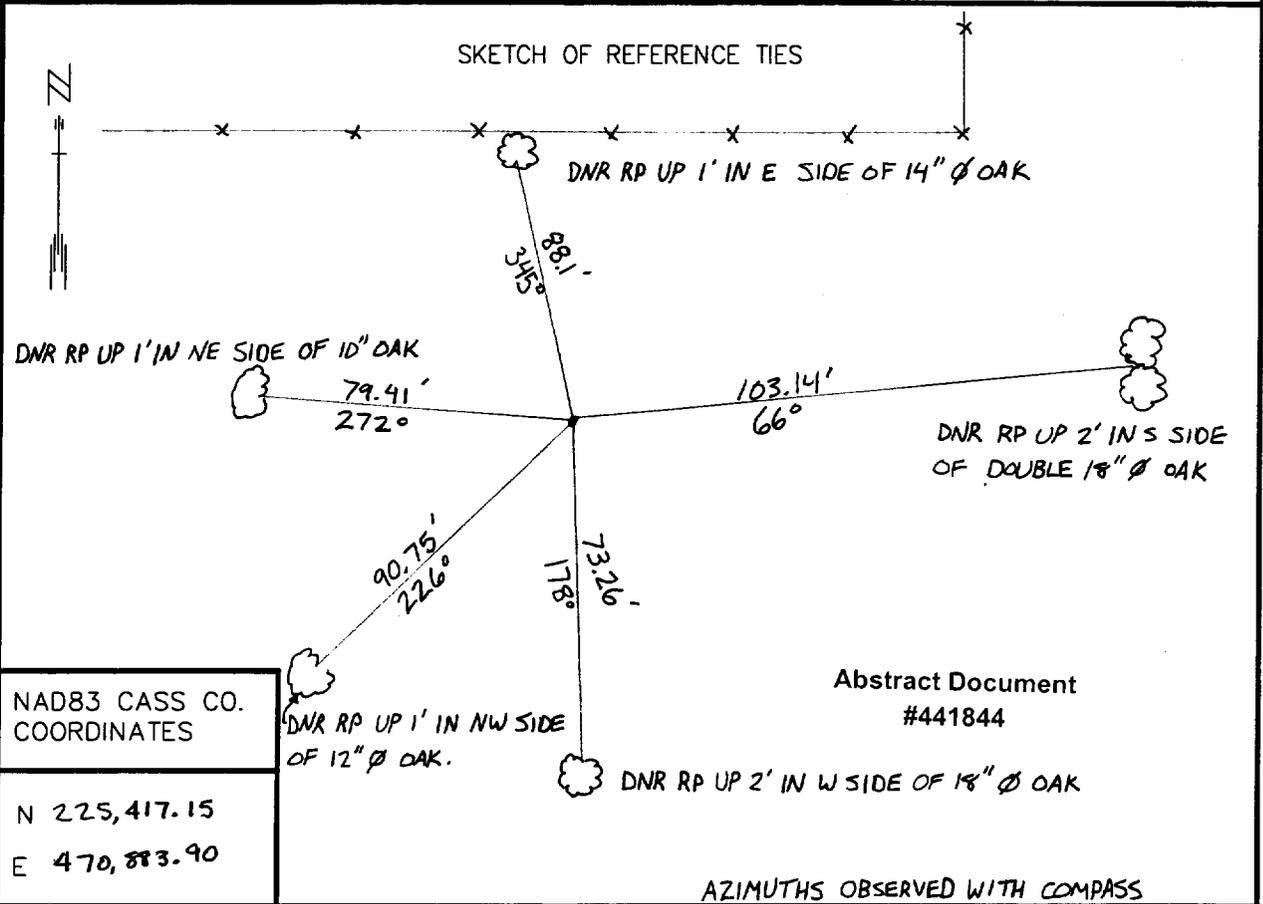

|                               |
|-------------------------------|
| NAD83 CASS CO.<br>COORDINATES |
| N 225,417.15                  |
| E 470,883.90                  |

Statement of evidence relative to this corner location is on back of page. DATE  
FILE WMA01198

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 3/31/01  
SIGNATURE DATE

License Number 16098

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. recorders office at 2:28 P.M. on the 16th day of Oct. A.D., 2001

County Recorder Kathryn M. Norby  
By John F. Maeda, Deputy  
DOCUMENT NO. 441844

**Northeast Corner Section 21, Township 135 North, Range 31 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
Cass County Surveyor  
Widseth, Smith and Nolting of Brainerd  
Landecker and Associates of Pequot Lakes  
Landecker and Associates of Walker  
Central Minnesota Surveying

1870 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

W. Pine 18" S 49 ° E 56 links (36.96")  
Maple 12" S 43 ½° W 28 links (18.48")  
Dead W. Pine 24" N 46° E 70 links (46.20')  
W. Pine 15" N 10 ½° W 48 links (31.68')

1920 Lincoln Mackey surveyed the Rainbow Trail through this township. He found all four original tie trees and set a 2" x 48" iron monument. He took the following new tie:

W. Pine 18" N 70° 15' W 362.0'

His measurement to the northeast corner of section 22 was 5278' and to the northeast corner of section 20 was 5329.0'.

1971 Donald Coulter worked on sections 10 - 15 for a plat of Wilderness Park. He found the 1920 Horst tie tree and set a 1 1/4" iron pipe. He found a 2" iron pipe NNW 98.0' and took ties to five oak trees. He measured 5278.28' to the northeast corner of section 22.

1998 The DNR survey crew found the 5 tie trees taken by Coulter. A MNDNR Survey Marker was set from the tie trees to mark the original location of the corner. The distance to the northeast corner of section 22 is 5278.08' and to the northeast corner of section 20 is 5324.86'.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425