

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

David S. Landecker

 David S. Landecker

Date: 8/5/04 License No: _____ 17008

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
 DOCUMENT NO. _____

NORTH QUARTER Corner of Section 9, Township 137, Range 29, 5TH P.M.

On _____ found a _____


left monument as found, lowered monument, removed monument (explain)

On 7/23/04 placed a SET 1 INCH IRON WITH CAP 17008 FLUSH WITH GROUND IN THE FIELD ROAD AT THE GATE.

SKETCH OF REFERENCE TIES

Corner Index: E-11

Not to Scale

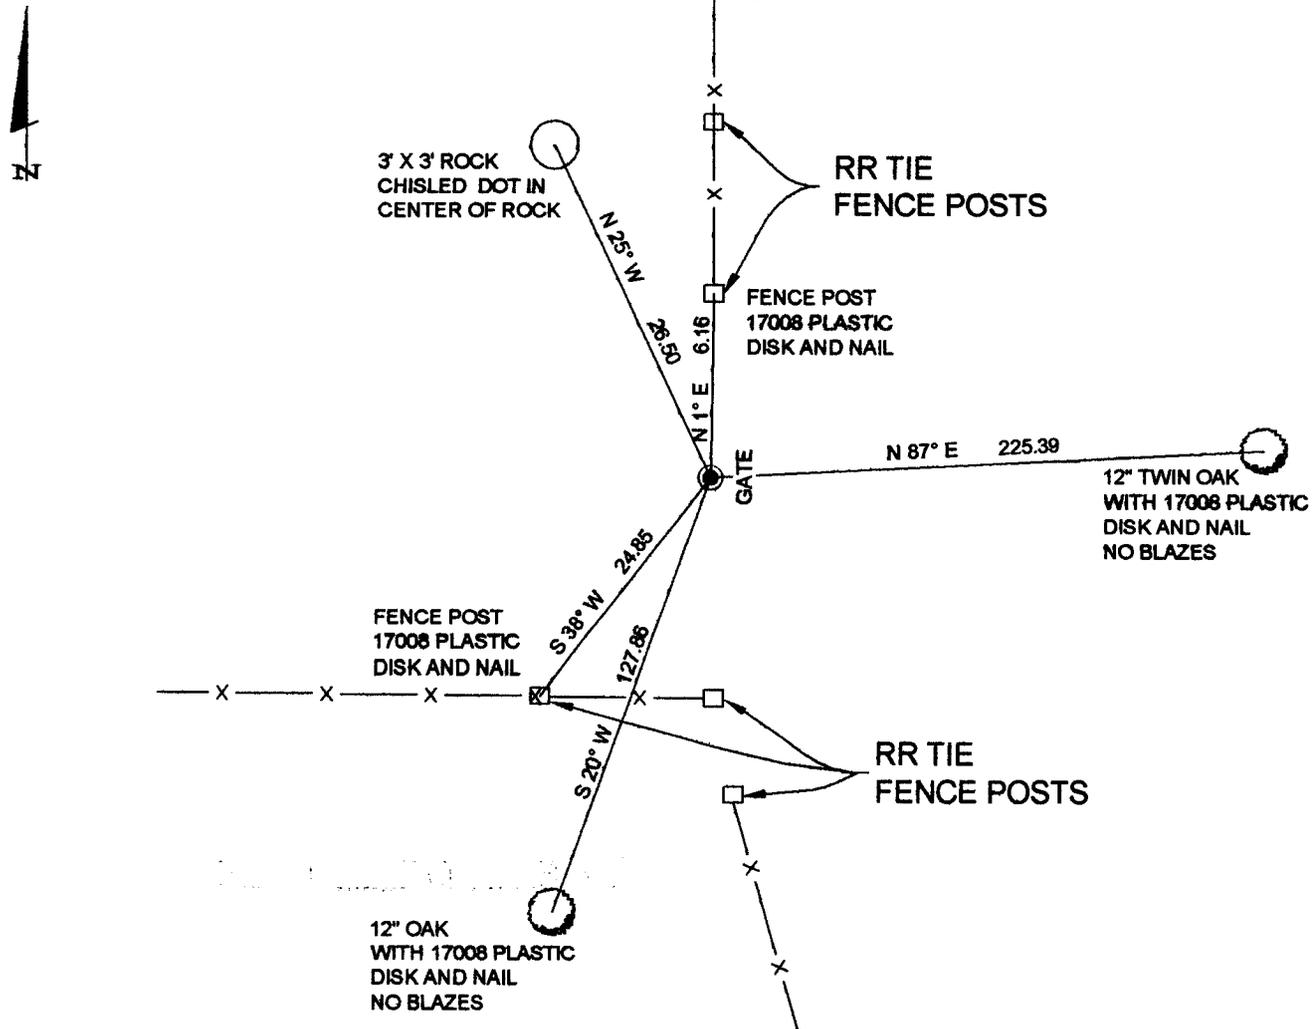

Statement of evidence for this corner position is on the back of this page

Statement of Evidence: (E-11)

North Quarter Corner, Section 9, Township 137 North, Range 29 West, Cass County, Minnesota.

1865 – In accordance with a joint contract dated April 12, 1865, George B. Wright and Thomas B. Walker, deputy surveyors, completed the subdivision of Township 137 North, Range 29 West, 5th Principle Meridian, in July, 1865. The subdivision and map was subsequently approved on October 7, 1865 by the U.S. Surveyor Generals Office. The referenced government corner was set from which:

10" Oak	S 34° E	78 LKS
12" Oak	N 65° W	5 LKS

2004 – Mark Crenshaw, surveyor with Landecker and Associates Inc., under the direction of David S. Landecker, Licensed Professional Land Surveyor #17008, searched extensively for evidence of the original corner and bearing trees for said Corner. Set a 1 inch iron pipe with plastic cap 17008 as the North Quarter Corner said Section 9, by lost method, on line split between the Northeast and Northwest Section Corners. the following witnesses were established:

3'x3' Rock	N 25° W	26.50 Feet
RR tie Post	N 01° E	6.16 Feet
12" twin Oak	N 87° E	225.39 Feet
12" Oak	S 20° W	127.86 Feet
RR tie Post	S 38° W	24.85 Feet

A000488016

**OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA**

**CERTIFIED, FILED, AND/OR
RECORDED ON
08/23/2004 09:03:59AM**

**AS DOC #: A000488016
PAGES: 2
REC FEES: \$0.00**

**KATHRYN M. NORBY
COUNTY RECORDER**

BY Kathryn M. Norby **DEPUTY**
HV