

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
 TERRY L. FREEMAN

Date: 3/29/05 License No: 21367

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____
 By: _____, Deputy
 DOCUMENT NO. _____

NORTHEAST Corner of Section 20, Township 140, Range 31, 5TH P.M.

On 03/07/05 found a 2 INCH IRON PIPE MONUMENT UP ±17 INCHES

left monument as found, lowered monument, removed monument (explain)


On _____ placed a _____

decl: 5° EAST (ASSUMED)

SKETCH OF REFERENCE TIES

INDEX NO. N-9

Not to Scale

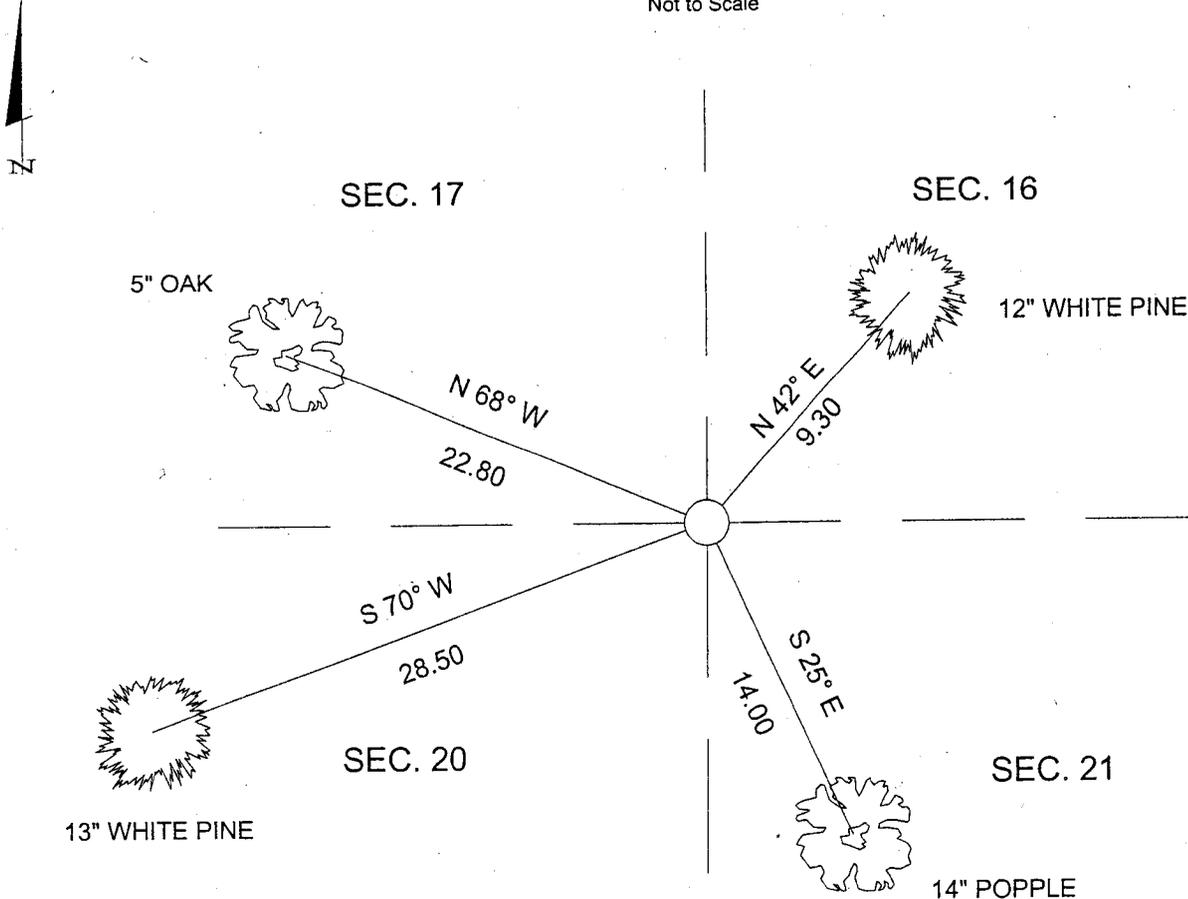

THE BEARING TREES WERE MARKED WITH BT TAGS AND NAILS AT BASE.

ALL DISTANCES ARE HORIZONTAL TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. N - 9

Northeast Corner, Section 20, Township 140 North,
Range 31 West, Cass County, Minnesota

- 1870 T.B. Walker, U.S. Deputy Surveyor, originally established this corner while surveying the interior subdivision and meander lines of Township 140 North, Range 31 West. A wood post was set with the following witnesses: A 14 inch White Pine, South 68 degrees East, 100 links; A 16 inch Norway Pine, North 76 degrees East, 142 links.

- 1915 County Survey Record Book "B", page 467 shows a survey by N.D. Gorman. He set an 80d spike proportionally and established the following witnesses: A 25 inch Pine stump, North 41 degrees 02 minutes West, 65.6 feet; A 36 inch Pine stump, South 74 degrees 36 minutes West, 89.00 feet.

- 1974 Don Coulter, RLS#5852, found an iron monument in place.

- 2005 A Landecker and Associates, Inc. survey crew found a 2 inch iron pipe up ±17 inches and accepts the found monument as a perpetuation of the Northeast Corner position from which the following accessories: A 12 inch White Pine, North 42 degrees East, 9.30 feet; A 14 inch Popple, South 25 degrees East, 14.00 feet; A 13 inch White Pine, South 70 degrees West, 28.50 feet; A 5 inch Oak, North 68 degrees West, 22.80 feet.

A000496578

**OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA**

**CERTIFIED, FILED, AND/OR
RECORDED ON
03/29/2005 01:28:37PM**

**AS DOC #: A000496578
PAGES: 2
REC FEES: \$0.00**

**KATHRYN N. NORBY
COUNTY RECORDER**

BY Kathryn Norby **DEPUTY**
TV