

A000549048

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
RECORDED ON
05/12/2009 03:29:22PM

AS DOC #: A000549048
PAGES: 2
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M Norby DEPUTY
mw


Index No. N-11

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 21, Township 135, Range 30
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 2/19/98 found a 2" X 48" iron pipe, up 2' in low area
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ Placed a _____
DATE

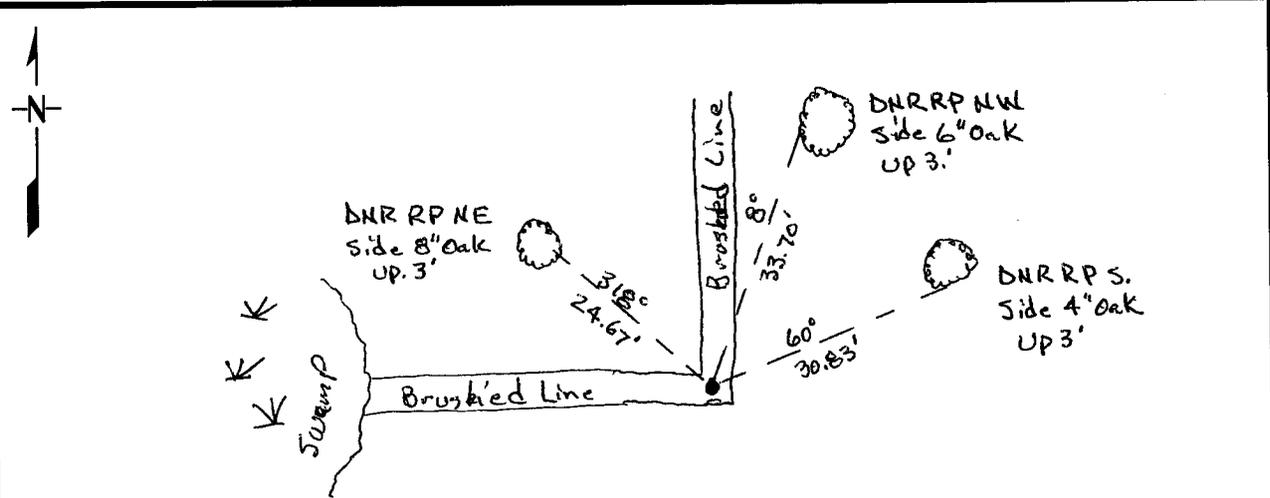

CASS COUNTY
COORDINATE SYSTEM
NAD 1983 86 ADJ.
N = 225367.60
E = 500283.58

Azimuths taken with Compass

Statement of evidence for this corner location is on back of this page.

4/30/09 JDW
FOM01856

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE [Signature] DATE 4/30/09 License Number 16098
 Title: Land Surveyor Professional Engineer County Surveyor County Engineer

North Quarter Corner Section 21, Township 135 North, Range 30 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
Cass County Surveyor
Widseth, Smith and Nolting of Brainerd
Landecker and Associates of Pequot Lakes
Landecker and Associates of Walker
Central Minnesota Surveying

1869 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Ash 3" N 23° E 18 links (11.88')
Oak 3" S 24° E 5 links (3.30')

1998 In February, the DNR survey crew found a 2" iron pipe, up 2' in a low area. The iron is 0.85' northerly and 0.28' westerly of the lost position. The iron was accepted as marking the obliterated location of the corner.

Distances were measured to the following corners:

Northeast Corner Section 20 - N 89°40'01"W 2641.10'
Northeast Corner Section 21 - S 89°37'49"E 2641.67'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401