



8 0 3 7 2 7 4

Tx:4026798

A000581278

**OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

06/12/2012 11:25:16 AM

AS DOC #: A000581278

PAGES: 2 REC FEES: 0.00

**KATHRYN M. NORBY
COUNTY RECORDER**

Index No. G-1


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WEST QUARTER Corner of Section 7, Township 135, Range 32

5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE _____
- left monument as found, lowered monument, removed monument (explain)
- On 2/23/12 Placed a 3/4" X 24" REBAR WITH PLASTIC CAP STAMPED "MN DNR LS 47461"
DATE _____
10' WEST OF TOE OF STEEP SLOPE AT FENCE CORNER IN MARSH

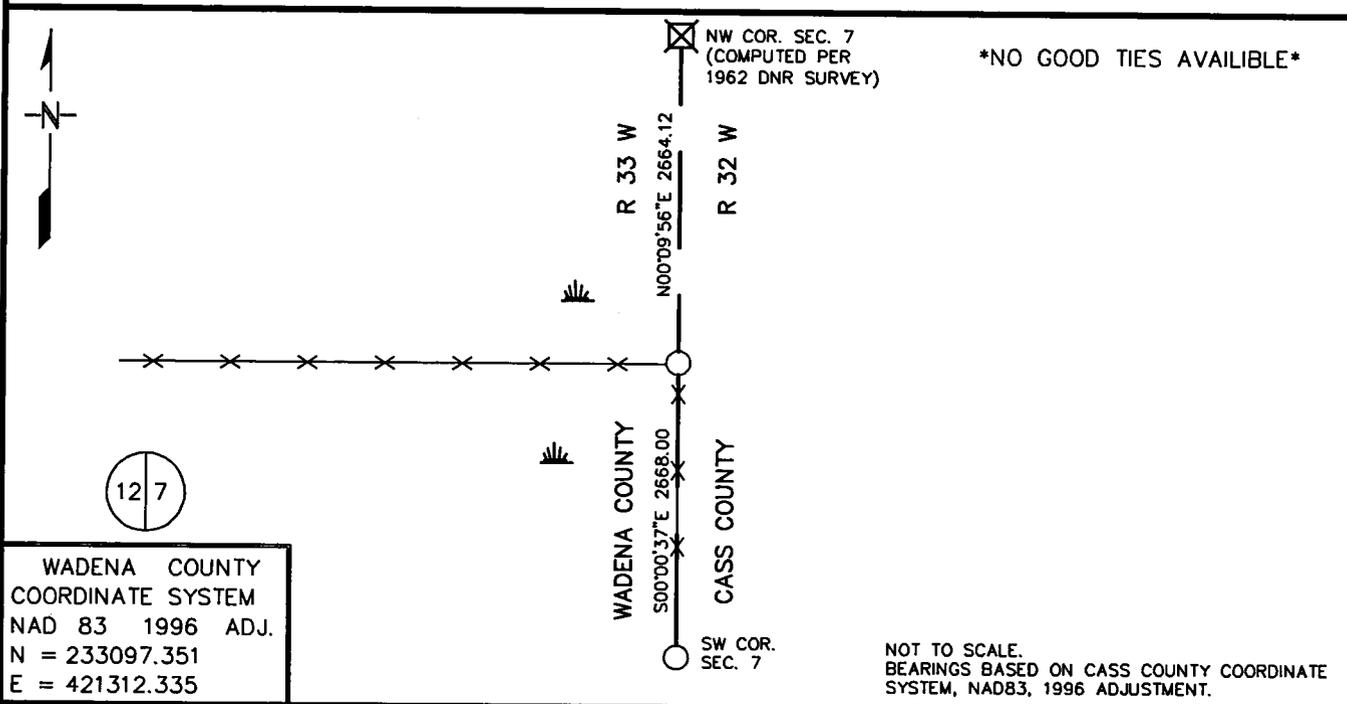

NO GOOD TIES AVAILABLE

WADENA COUNTY
COORDINATE SYSTEM
NAD 83 1996 ADJ.
N = 233097.351
E = 421312.335

NOT TO SCALE.
BEARINGS BASED ON CASS COUNTY COORDINATE
SYSTEM, NAD83, 1996 ADJUSTMENT.

Statement of evidence for this corner location is on back of this page.

RAL APRIL 2012
WMA01870.00.00.01

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE [Signature] DATE 5/15/12 License Number 47461

Title: Land Surveyor County Surveyor

STATEMENT OF EVIDENCE**West Quarter Corner of Section 7, Township 135 North, Range 32 West, 5th P.M.**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

MN History Center
Wadena County Department of Highways
Cass County Survey Department
Wadena County Recorder
Nyberg Surveying

- 1858 The US General Land Office field notes, on file in the History Center, show this corner to be marked with a post and the following bearing trees:
Spruce Pine 14" N 66° W 25 links (16.5')
Spruce Pine 9" S 12° W 80 links (52.8')
- 1924 County Record Book "1", page 17 found at the Wadena County Highway Department shows a Cass-Wadena judicial road. The Northwest Corner Section 7 is station 0+00, the West Quarter Corner is station 26+64, and Southwest Corner is 53+32. With a deflection angle of 0°8' E. Denotes corner and unspecific ties 42.43' NE and NW.
- 2001 In June, the Department of Natural Resources survey crew searched for evidence of the corner and found nothing. They did find the Northwest Corner Section 6 and the Northwest Corner Section 19.
- 2012 In February, the DNR survey crew searched for evidence of the corner and found an old downed corner fence post of fences south and west. No other evidence of the corner was recovered. The fence corner fit the 1924 road stationing and deflection angle very well. The fence corner was considered to be the best available evidence of the corner location and was accepted as marking the corner. An iron monument was set at the corner to perpetuate the location.

For information on our survey in this area, please contact the MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401