

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 19, Township 140N, Range 29W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 03/06/2013 found a 1 1/4" PIPE IN FENCE CORNER
Date

left monument as found lowered monument removed monument (explain)

On _____ placed a _____
Date


SKETCH OF REFERENCE TIES

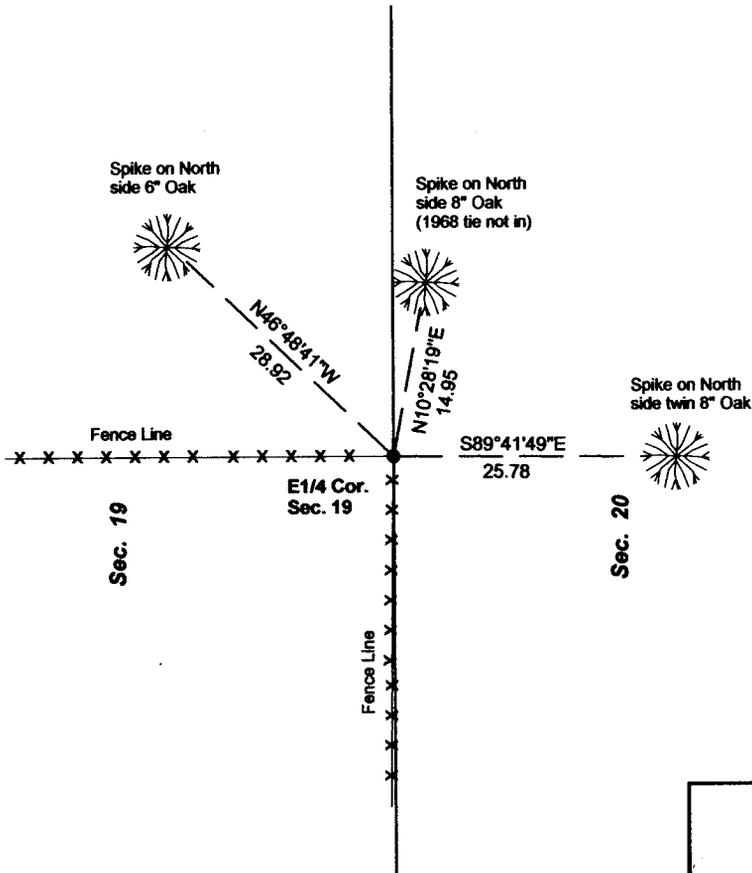

Tie Distances are measured to the spikes.

Cass County Coordinate System (North Zone)
N= 145664.986261 E= 458132.824917

● Found Pipe



NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R. Kohout 22 July 2013
Marvin R. Kohout Date

Registration No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000594832

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

7/25/2013 3:07:47 PM

AS DOC #: A000594832

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

Page 1 of 2 A000594832



STATEMENT OF EVIDENCE

EAST QUARTER CORNER OF SECTION 19, TOWNSHIP 140N, RANGE 29W, 5TH P.M.

- JAN 1870 ORVILLE SMITH, DEPUTY GOVERNMENT SURVEYOR, SET A POST TO MARK THE CORNER LOCATION. REFERENCES:
8" W. ASH N65E 60 LINKS 6" BLACK OAK S69W 33 LINKS

- APRIL 1968 ROBERT F. SCHNEIDER, LS NO. 5740, SHADES OF SUMMER ADDITION PLAT, SHOWS SET 1" GALVANIZED PIPE 0.8 SOUTHWEST OF FENCE CORNER. FENCES RUN EAST, WEST & SOUTH. DOCUMENT NO. 188795 BOOK C PAGE 13. REFERENCES: 11" R. OAK S78W 23.79' 6" W. OAK N9E 15.90'

- SEPT. 2007 ROGER MUSTONEN, LS NO. 11946, AMI SURVEYORS & MAPPERS, ON CERTIFICATE OF SURVEY SHOWS FOUND MONUMENT, CCSO DOCUMENT NO. 3710 & 3729.

- MAR. 2013 MARVIN R. KOHOUT, LS NO. 17774, FOUND 1 1/2" PIPE BY FENCE CORNER. THE FOUND PIPE IS ACCEPTED AS MARKING THE LOCATION OF THE E1/4 CORNER OF SECTION 19.

8/26/13 10:50 AM

Kimberly H. Hensley

2013