

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 2  
Township 139 N, Range 26 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF Cass



A000596793

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

9/26/2013 2:30:43 PM

AS DOC #: A000596793

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep


On \_\_\_\_\_, found a(n): \_\_\_\_\_  
DATE

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 3/20/2013, set a(n): 5/8x24" Rebar With Plastic Cap  
DATE  
Stamped "Leas MN 42619" up 0.5'.

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

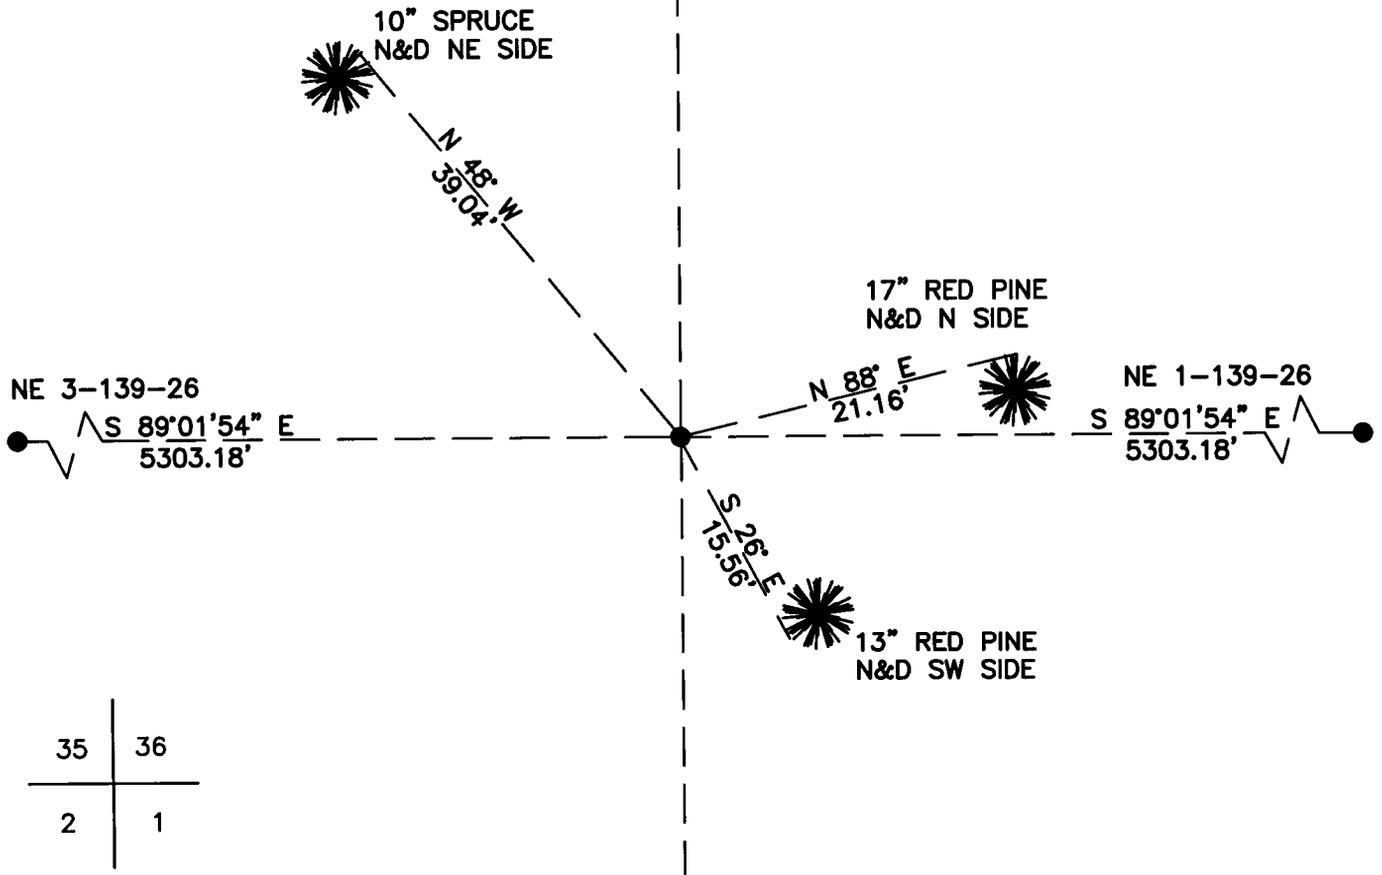

### "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

### CASS COUNTY SOUTH COORDINATES

Northing: 368103.940  
Easting: 635854.834

NAD 83/2007 Adjustment.  
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature

4-30-2013  
date

Jarrett M. Leas, Minnesota License No. 42619

Page 1 of 2 A000596793



Statement of Evidence

**Northeast corner of Section 2, Township 139 North, Range 26 West, 5th Principal Meridian.**

- 1863    The US General Land Office, in notes of the survey between Townships 139 and 140 North, Range 27 West, set a post for the original corner and referenced it as follows:
- |           |         |          |           |         |          |
|-----------|---------|----------|-----------|---------|----------|
| 9" Aspen  | N 20° E | 44 links | 7" Maple  | N 25° W | 15 links |
| 14" Maple | S 78° W | 47 links | 12" Birch | S 65° E | 15 links |
- Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- 1927    John Greene, Curo field book 191, page 111, on file in the CCSO, indicates finding the corner.
- 1937    The CCC Washburn Lake field book 1, page 51, on file at the DNR office in Brainerd, indicates a found 2" iron pipe with cap marked 35,36,2,1 at 5327' from the north and 5282' from the west. The following remains of bearing tree were noted as follows: 24" W. Pine stub 10' high S84°30' W 85 feet, 30" Burned N. Pine stump S 9° E 45 feet, book 2, page 37 indicates the corner is 5288' from the east.
- 2013    KLJ field crews searched the area and found and nothing. This corner was set lost by single proportion between the NE 3 and the NE 1. A 5/8" x 24" rebar with plastic cap stamped "Leas MN 42619" was set to mark the corner position and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.