



A000598893

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/12/2013 9:20:00 AM

AS DOC #: A000598893

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Twp 135 Rge 32 Index No. G-9

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter of Section 8, Township 135 N., Range 32 W., 5th P.M.
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On _____ found _____

left monument as found lowered monument removed monument (explain)

On 19 Aug 2004 placed a 7/8 inch ODIP, stamped 16459, down 0.3 foot,
5 feet±, east of centerline of a Minimum Maintenance Road.

SKETCH OF REFERENCE TIES NOT TO SCALE

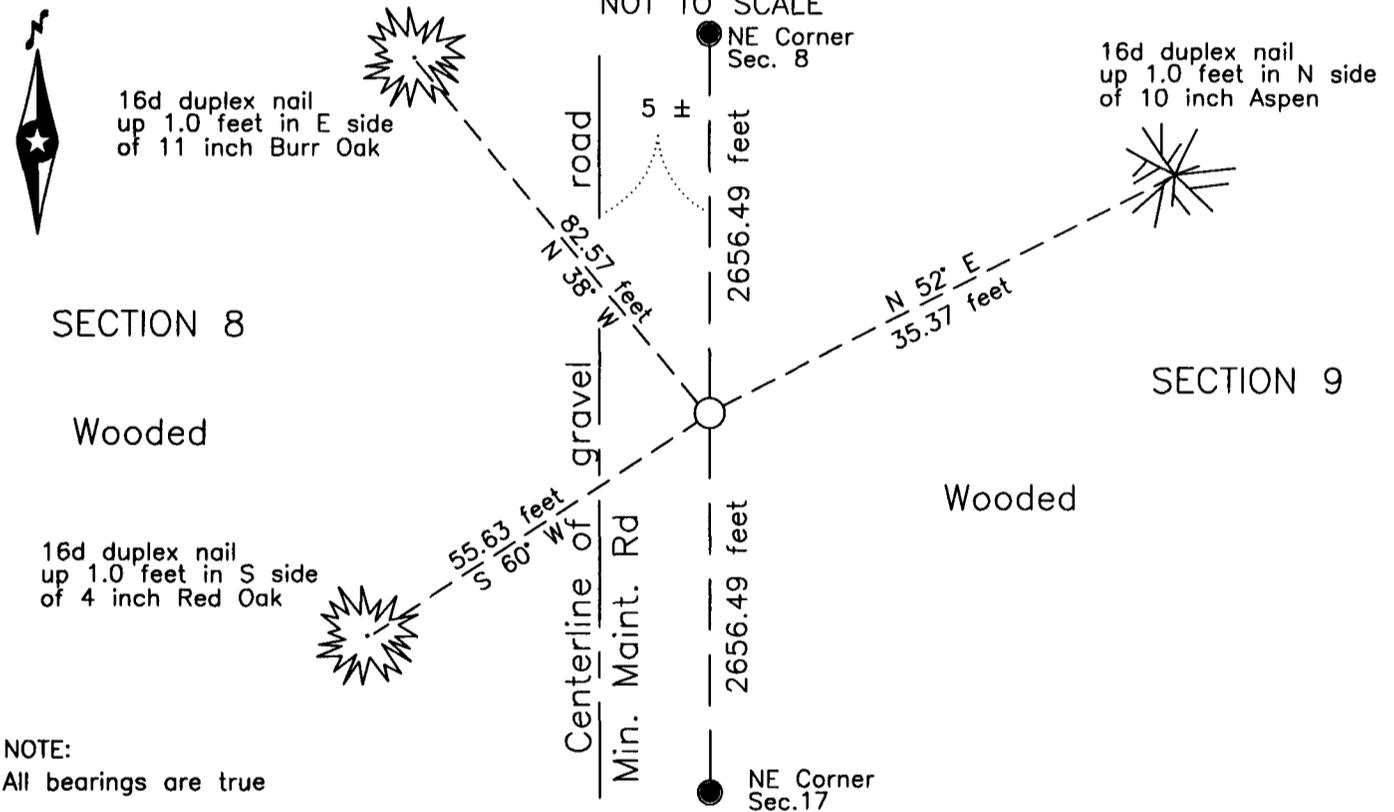

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor

Date 12/11/13 MN License No. 21367



Index No. G.0-09.0

Statement of Evidence

East Quarter corner of Section 8, Township 135 North, Range 32 West, 5th Principal Meridian.

Oct. 1866 O.E. Garrison, General Land Office (GLO) Deputy Surveyor, in the notes of the subdivision of Township 135 North, Range 32 West, set a post for the original corner and referenced it as follows:
8" Bl. Pine N 78° E 23 links (15.18 feet) 10" Bl. Pine S 61° W 35 links (23.10 feet)
Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).

Aug. 2004 B.Hippen, CCSO technician, records of the CCSO, set a 7/8 inch outside diameter iron pipe, stamped 16459, down 0.3 foot, 5 feet, more or less, east of centerline of a Minimum Maintenance Road, midway and on line between the recovered northeast and southeast corners of Section 8 and witnessed as follows:
8" J. Pine N 36° W 40.87 feet 8" Aspen N 52° E 35.37 feet
12" J. Pine S 49° W 39.46 feet

July 2013 B.Hippen, CCSO technician, records of the CCSO, found the monument from 2004 and witnessed. The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by CCSO in 2004 is the accepted location of this corner.

County Coordinates (Cass County South)

Northing 233060.51

Easting 431391.73