

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 32
Township 145 N, Range 26 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000599557

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

1/9/2014 1:30:07 PM

AS DOC #: A000599557

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR _____ Dep



On _____, found a(n): _____
DATE

- | | |
|---|---|
| <input type="checkbox"/> left monument as found | <input type="checkbox"/> lowered monument |
| <input type="checkbox"/> removed monument (explain) | <input type="checkbox"/> raised monument |

On 3/7/2012, set a(n): 3/4"x 4' Rebar With 3" Aluminum
DATE
Cap 6" Above Ground

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

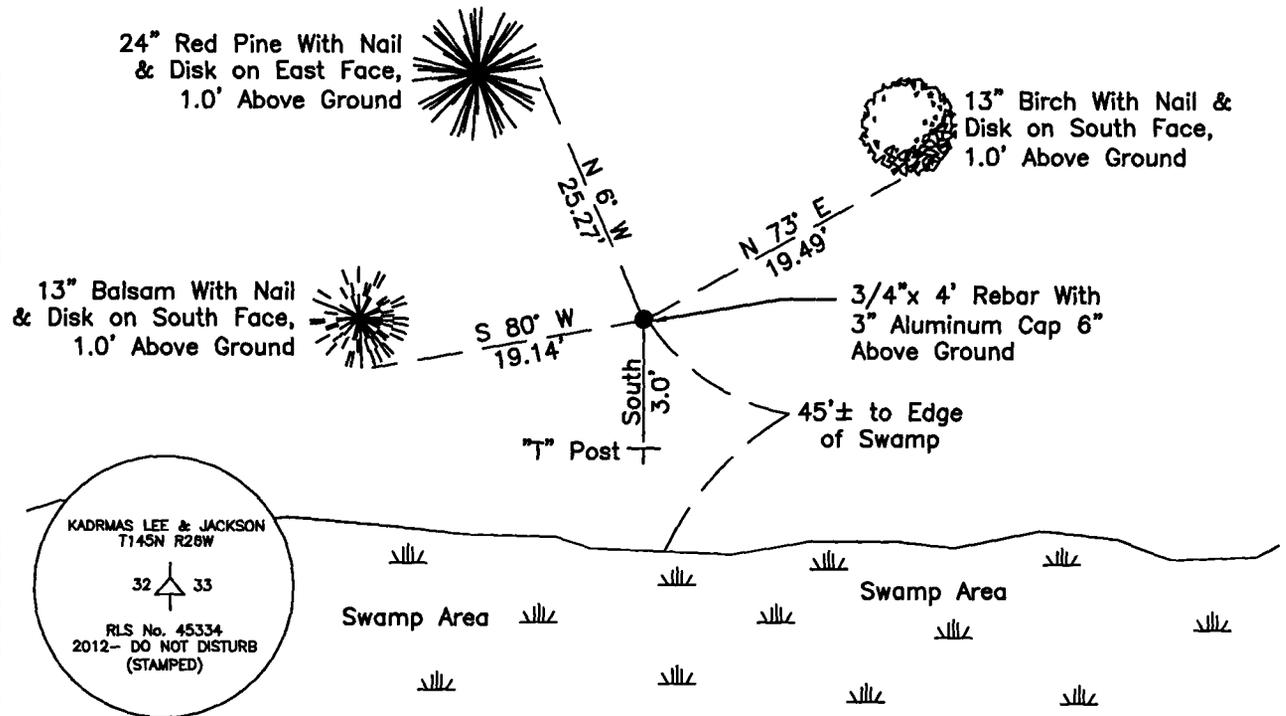

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17200007.020'

Easting: 1395268.965'

NAD 83/1996 Adjustment.


Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/6/13
date

Ross Wamre, Minnesota License No. 45334





STATEMENT OF EVIDENCE: Quarter Corner common to Sections 32 and 33 of Township 145 North,
Range 26 West of the 5th Principal Meridian.

1876; Benjamin C. Baldwin, for the Government Land Office established this corner and set a wooden post and witnessed by:

Norway Pine 20" South 80° West, 15 Links
Jack Pine 10" South 84° East, 35 Links

1900; US Army Corps of Engineers Map of the Pokegama Reservoir on file with the USFS shows this corner as found.

1938; State of Minnesota Department of Highway Right-of-Way Index map file 30-60A indicates corner tie to the centerline of U.S. Highway No. 2.

1983; State of Minnesota Department of Highway Right-of-Way Index map file 13-12 indicates corner tie to the centerline of U.S. Highway No. 2.

2010; A Kadrmas, Lee & Jackson survey crew found no evidence in a search of this corner location.

2012; Ross Wamre, RLS #45334, set a 3" stamped Aluminum Cap on ¾" x 4' rebar, 6" above ground at a calculated location from the State of Minnesota Highway right-of-way tie to the centerline of US Highway No.2. PI's recovered according to right-of-way maps stationing established angle and distance north from centerline to position. Witnesses found and established as shown on the face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office