

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 13  
Township 145 N , Range 30 W , 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



**A000601396**

**OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON**

**4/3/2014 11:30:07 AM**

**AS DOC #: A000601396**

**PAGES: 3**

**REC FEES: 0.00**

**KATHRYN M. NORBY  
CASS COUNTY RECORDER**

BY SR Dep

On 04/19/2010, found a(n): 1" Iron Pipe with a 2" Brass  
Cap stamped 1933, 0.8' Above Ground

- left monument as found       lowered monument  
 removed monument (explain)       raised monument


On \_\_\_\_\_, set a(n): \_\_\_\_\_  
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

28" Norway Pine With  
1933 Tag On  
Southeast Face, Spike  
On North Face

24" Norway Pine With  
Aluminum Tag On Southwest  
Face, Spike On West Face

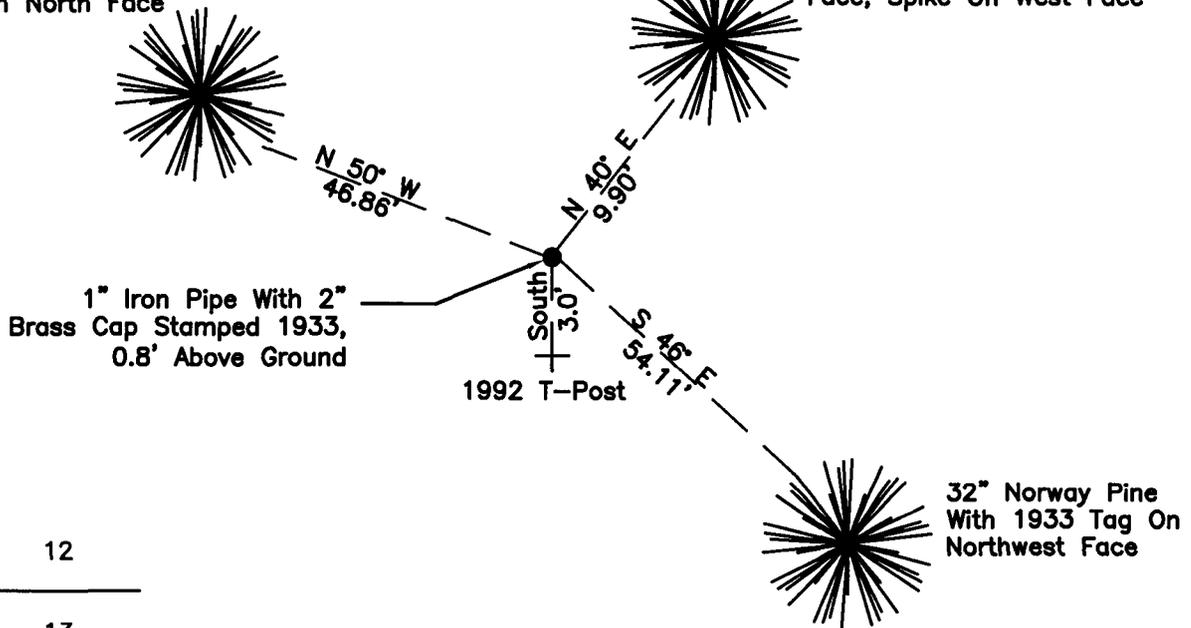

12

13

### "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17220064.580

Easting: 1287143.126

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

7/8/13  
date

Ross Wamre, Minnesota License No. 45334





**STATEMENT OF EVIDENCE:** Quarter Corner common to Sections 12 and 13 of Township 145 North,  
Range 30 West of the 5<sup>th</sup> Principal Meridian

**1874;** This corner was originally established by P.H. Conger for the GLO. His field notes indicate this corner position, witnessed by:

Jack Pine 8" North 52° East, 52 links  
Jack Pine 8" South 13° West, 46 links

**1928;** J.A. Donery, Forest Ranger, USFS 874 form, found a three inch stake scribed ¼ S witnessed. Information on file with the USFS office in Cass Lake.

Jack Pine North East 15 Paces Scribed ¼ S B.T. (1874 tie)  
Jack Pine South West 9 Paces Scribed ¼ S B.T. (1874 tie)

**1933;** Resurvey by GLO, Willis W. Bandy, from remains of original bearing tree, two Jack Pine snags, set a 1" diameter, 3' long Iron Post, 27" in ground with stamped Brass Cap and witnessed by:

Jack Pine snag 8" North 52° East, 52 links – 34.32 ft. (1874 tie)  
Jack Pine snag 8" South 13° West, 46 links – 30.36 ft. (1874 tie)

New BT:

Norway Pine 11" North 49 ¾° West, 71 links – 46.86 ft.  
Norway Pine 11" South 45 ¾° East, 82 links – 54.12 ft.

**1963;** W. H. Okerman, RLS #6807 and R.H. McDonald, USFS Book 1 of Township 145 North, Range 30 West, page 51, found the Iron post with Brass Cap and GLO 1933 bearing trees. An Affidavit as to Location of Government Corner is filed at the Cass County Office of Register of Deeds. Corner is witnessed by:

Norway Pine 17" North 49 ¾° West, 71 links – 46.86 ft. (1933 tie)  
Norway Pine 19" South 45 ¾° East, 82 links – 54.12 ft. (1933 tie)

New BT:

72" Long Steel Sign Post, with Sign 54-4 West 3.9 ft.

**1992;** Brama, USFS Book 1 of Township 145 North, Range 30 West, page 51, found GLO Iron pipe with Brass cap set in place, 10" above ground and found both 1933 bearing trees but no evidence of sign post set in 1963 or original BTs.

8' Steel Sign Post, with Sign 54-4, South 3 ft.

**2010;** A Kadrmas, Lee & Jackson survey crew found a 1" Iron Pipe with a 2" Brass Cap Standard GLO monument stamped 1933, 0.8' above ground. Witnesses found and established as shown on the face of this certificate.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.



Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office