



A000603431

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

6/26/2014 12:53:23 PM

AS DOC #: A000603431

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep

page 1 of 2  
A000603431

Twp 137 Rge 32 Index No. L.0-25.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter corner of Section 13, Township 137 N., Range 32 W., 5th P.M.

State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 3 June 2014 found 3/4 inch iron rod, with DNR survey cap, up 0.2 foot,  
on hill top, 40 feet± east of trail.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_


SKETCH OF REFERENCE TIES  
NOT TO SCALE

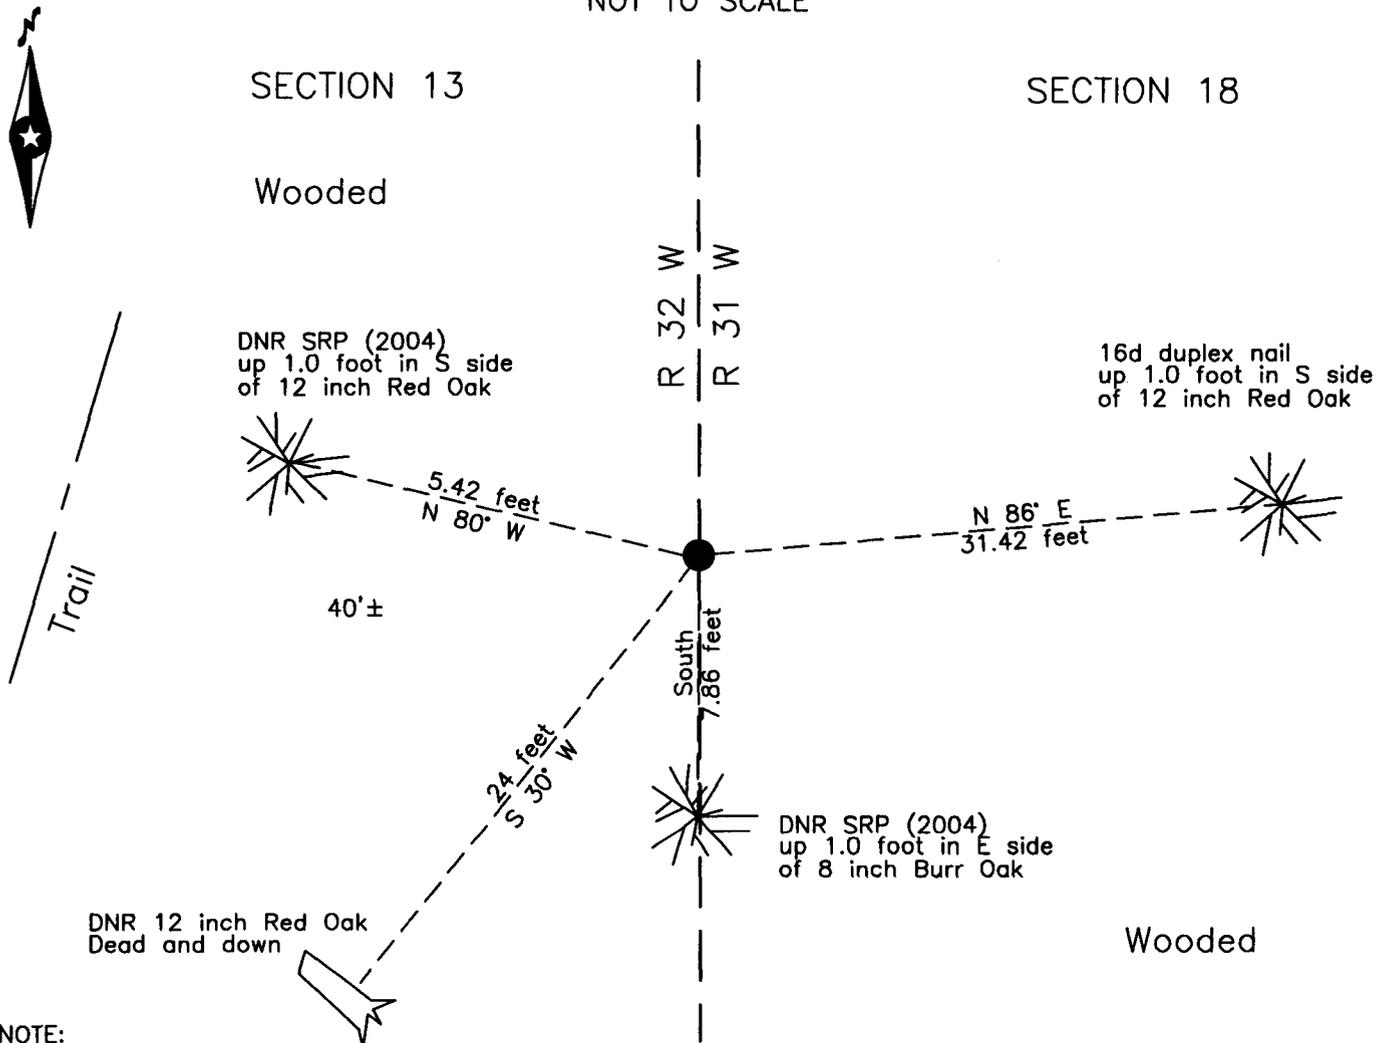

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

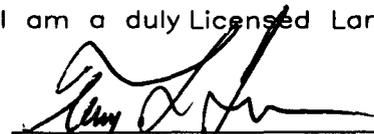  
Terry L. Freeman, Cass County Surveyor

Date 6/25/14 MN License No. 21367



Statement of Evidence

**East Quarter corner Section 13, Township 137 North, Range 32 West, 5th Principal Meridian.**

- July, 1860    J.W. Myers, General Land Office (GLO) Deputy Surveyor, notes for the survey of the 4<sup>th</sup> Guide Meridian set a post for the original corner and referenced it as follows:  
           4" W. Birch      N 40° W      6 links (3.96 feet)      4" R. Oak      S 35° E      8 links (5.28 feet)  
           The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
  
- Oct. 2002    P.J. Axness, Minnesota Department of Natural Resources (DNR), Foothills State Forest, file SFT00019, on file in the Brainerd Office, searched for evidence of the corner and found nothing. The nearest corners found on the range line were the Northeast corner Section 13 and the Northeast corner Section 36. He measured 15720.65 feet between them.
  
- Aug. 2004    J.D. Walker, LS 16098, DNR, Foothills State Forest, file SFT00019, on file in the Brainerd Office, set a 3/4 inch iron rod with survey cap on top of hill, at a lost position on the range line between the found corners and witnessed as follows:  
           12" Oak            280°            5.42 feet            8" Oak            180°            7.86 feet  
           12" Twin Oak    250°            24.33 feet
  
- June 2014    B. Hippen, technician, records of the CCHD/SO, found the DNR survey marker, up 0.2 foot, on hill top, 40 feet, more or less, east of trail, the DNR SW witness is down, of DNR witnesses and new witness as follows:  
           12" Red Oak      N 80° W      5.42 feet            8" Burr Oak      S 0° E            7.86 feet  
           12" Red Oak      N 86° E      31.42 feet

The recovered and established references for the position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by the DNR in 2004 is the accepted location of this corner.**

County Coordinates (Cass County South)  
Northing 291209.62  
Easting 451420.75